



INSTALLATION INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

MESURES DE SECURITE A RESPECTURE

Before assembling your ACCESS LIGHTING fixture, please make sure that you carefully read through this instruction sheet. Save this instruction sheet and refer to it when additions to or changes in the fixture configuration are made.

Lisez attentivement ce manuel d'instructions. Enregistrer cette feuille d'instructions et de s'y référer lorsque les ajouts ou changements dans la configuration de montage sont faites.

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

CONSULTER UN ELECTRICIEN QUALIFIE POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DERIVATION SONT ADEQUATS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS

NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

Read all instructions

Do not install this fixture in hazardous locations.


N'installez pas cet appareil dans des emplacements dangereux.

Do not install any fixture assembly closer than 6 inches from any curtain or similar combustible material.

Laisser une distance d'au moins 6 pouces entre ce luminaire et la toute surface combustible.

"WARNING Risk of Fire and Electric Shock."

"CAUTION: Risque d' Incendie et de Choc Electriques."

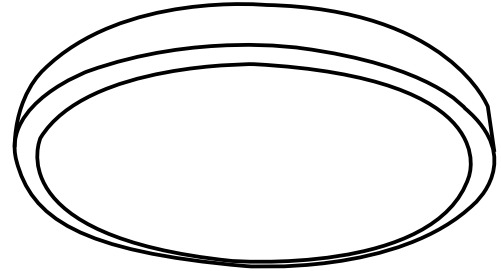

COLLECTION
LUCID

APPLICATION
Ceiling

MODEL NO.
20799LEDMS

WHAT WE PROVIDE

- Mounting Hardware
- 1 X Acrylic shade
- LED

WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code


GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and the U.S. National Electrical Codes (NEC). These fixtures are intended for mounting to a standard 4" metal octagon outlet box.

The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS


Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

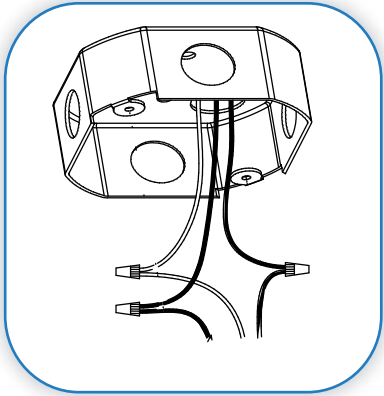

1

PREPARE FIXTURE


If there is an existing fixture remove it.
Expose the supply wires from the J-box.

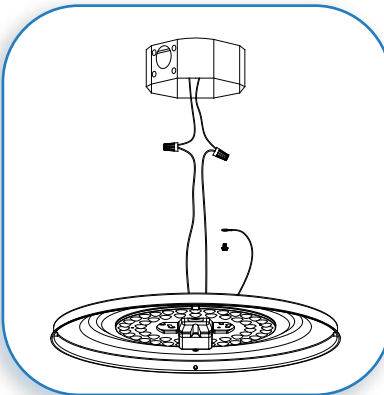

2

MAKE WIRE CONNECTIONS


Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wire to the white fixture wire. Secure with the supplied wire nuts. Attach the green J-Box wire around green hexagonal head screw or connect it to the green supply grounding wire of the fixture. Secure all wire with electrical tape (not supplied). Tuck all wires carefully into the J-Box.

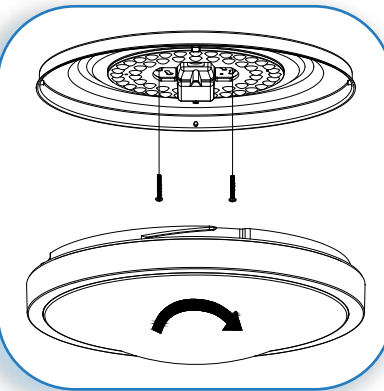

3

MOUNT FIXTURE

Align the holes of the fixture housing to the J-box and secure with the supplied screws.
Set Motion sensor which comes preset to detect within a 10 foot radius, dims down to 20% brightness after 30 seconds of inaction, and completely turns off after one minute. For custom settings, see next page: Motion Sensor Settings Guide.
Align the acrylic shade up to the canopy and rotate clockwise to secure.

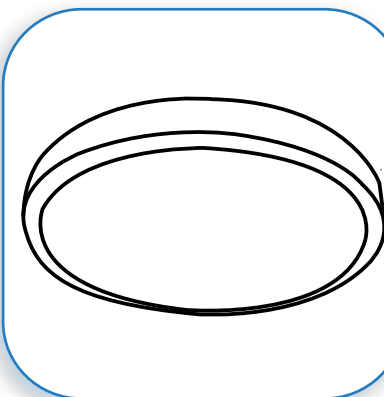

4

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS LIGHTING FIXTURE

CAUTION

If the fixture is to be removed or replaced, please ensure that the electricity is switched off and that the fitting is cool before touching it.

MOTION SENSOR SETTINGS GUIDE



BEFORE YOU BEGIN

Before beginning the setup of your motion sensor, please familiarize yourself with the sensor’s layout and dip switches.

Detection Area			Hold Time			Daylight Sensor			Stand-by DIM			Turn-off Period		
1	2		3	4		5	6		7	8		9	10	
-	-	5'	-	-	15s	-	-	Disable	-	-	80%	-	-	0s
-	ON	20'	-	ON	30s				-	ON	50%	-	ON	30s
ON	-	40'	ON	-	1min				ON	-	25%	ON	-	10min
ON	ON	50'	ON	ON	5min				ON	ON	10%	ON	ON	Disable

TO SETUP THE MOTION SENSOR

STEP 1

Use the **DETECTION AREA SETTINGS** to set your desired detection area. The maximum detection radius is 50 feet (15 m) and 25 feet (7.6 m) in any direction from the midpoint of the luminaire. The dip switch settings allow for the following detection ranges:

- 50 feet (15m)
- 40 feet (12m)
- 20 feet (6m)
- 5 feet (1.5m)

1	2	
ON	ON	50'
ON	-	40'
-	ON	20'
-	-	5'

STEP 2

Following Hold Time setup, use the **STAND-BY DIMMING LEVEL SETTINGS** to indicate the reduced light level that you would like the luminaire to remain at after no motion is detected and the hold time has elapsed. The dip switch settings allow for the following light levels:

- 80%
- 50%
- 25%
- 10%

7	8	
-	-	80%
-	ON	50%
ON	-	25%
ON	ON	10%

STEP 3

Next, use the **HOLD TIME SETTINGS** to indicate the amount of time you want the luminaire to remain at 100% illumination after no motion is detected. The dip switch settings allow for the following hold times:

- 15 seconds
- 30 seconds
- 1 minute
- 5 minutes

3	4	
-	-	15s
-	ON	30s
ON	-	1min
ON	ON	5min

STEP 4

Use the **TURN-OFF PERIOD SETTINGS** to set how long the luminaire should remain at the low light level until turning off completely. If you want the luminaire to stay illuminated at the low light level without ever turning off completely, configure the switches to DISABLE. The dip switch settings allow for the following hold times:

- 0 seconds
- 30 seconds
- 10 minutes
- Disabled

9	10	
-	-	0s
-	ON	30s
ON	-	10min
ON	ON	Disable

Note: If the sensor is set with any setting other than what is illustrated, the corresponding features will be disabled. Motion sensor settings are now complete.