

WAC LIGHTING

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Vibe

Picture Light 2700K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PL-LED15	2700K 90	8.5W	595	240	BK Black
PL-LED25		16W	1186	535	BN Brushed Nickel
PL-LED37		23W	1785	850	CH Chrome
					SB Satin Brass

Example: **PL-LED15-27-BK**

DESCRIPTION

Designed to disappear, the low profile Vibe picture light features a canopy that both hides behind the artwork and serves as the mount. At less than an inch in diameter, the Vibe picture light shrouds the smallest light source available to provide substantial, full spectrum, and high quality lighting. Three lengths with 35 degree rotation accommodates artwork of varying sizes.

FEATURES


- Chronophoton Technology conserves artwork while providing vibrant color rendering
- Head rotates 35° up or down
- 110° beam angle
- Replaceable LED module
- EM fixtures provide at least 90 minutes of illumination during power outage
- Transformer installed within the Junction Box, transformer dimension: 2.00" x 1.38" x 1.02"
- 5 year warranty

SPECIFICATIONS

Construction:	Brass hardware with polycarbonate diffuser
Power:	16W, 23W, 8.5W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-10%, ELV: 100 - 10%
Rated Life:	70000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Finish:	Brushed Nickel, Black, Chrome, Satin Brass
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed



FINISHES

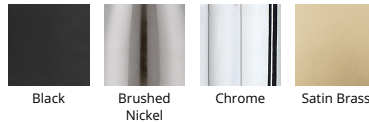

LINE DRAWING

