



# dweLED

By WAC



# dweLED

- LED Pendants + Chandeliers ..... 2
- LED Sconces + Bath ..... 118
- LED Sconces ..... 166
- LED Bedside Wall + Swing Arms ..... 206
- LED Ceiling Mounts ..... 234
- LED Outdoor ..... 272



# LED Pendants + Chandeliers

Design and décor styles have changed throughout the years, but the seminal moments have always favored fearless innovators that were creative and bold. We are very excited to unveil our latest dweLED Pendants and Chandeliers, pushing the envelope of design and technology to bring you true originals. Select an artistic statement piece for the lobby in your hotel or a remarkable luminaire to greet guests in a place of prominence, like the entryway of your home.



# ESCAPADE



PD-31228-BN shown



TITLE 24  
CALIFORNIA

PATENT  
PENDING





## 28" LED PENDANT

- Omnidirectional illumination with silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 80,000 hours  
Input: 120V/277V

PD-31228: Size: 28" Watt: 30W  
LED Lumens: 3,270 Delivered Lumens: 2,270

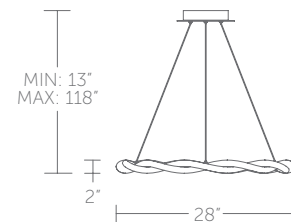

PD-31228

### Finish



BK:  
Black



BN:  
Brushed Nickel

Example: PD-31228-BK



“ Black or brushed nickel metal intimately intertwined with a complementary diffuser, weaving together two powerfully contrasting elements. ”

PD-31228-BK shown

# QUARTET



PD-29256-BK shown

“Intriguing geometric aesthetic defined by a staggered quad of acrylic diffuser panels in varying sizes.”



PD-29256-BK shown



PATENT PENDING



## 56" LED PENDANT

- Rotatable arm with etched acrylic diffuser to create desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish

**BK:**  
Black

Example: PD-29256-BK

**PD-29256:** Size: 56" Watt: 28W  
 LED Lumens: 2,500 Delivered Lumens: 1,189

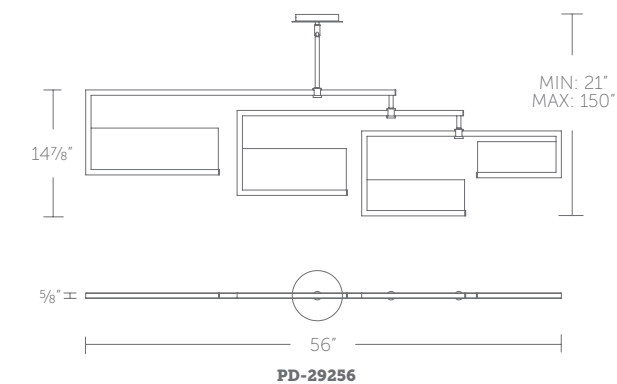



PD-33230-BN shown



TITLE 24  
CALIFORNIA



## 30" LED PENDANT

- Downlight with silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

PD-33230: Size: 30" Watt: 42W  
 LED Lumens: 3,300 Delivered Lumens: 1,987

### Finish





BK:  
Black



BN:  
Brushed Nickel

Example: PD-33230-BN

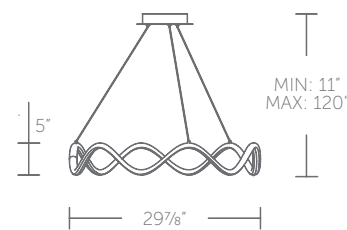

PD-33230



See complementary pieces  
on page 10-11.



“Abstract expressionist profile with an eye opening outlined by distinctive, curved metal and a silicone diffuser.”

PD-33230-BK shown

# MORAE



PD-33244-BK shown



TITLE 24  
CALIFORNIA



## 44" LED PENDANT

- Downlight with silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V


### Finish

**BK:**  
Black

**BN:**  
Brushed Nickel

Example: **PD-33244-BN**


**PD-33244:** Size: 44" Watt: 36W  
 LED Lumens: 2,500 Delivered Lumens: 1,512

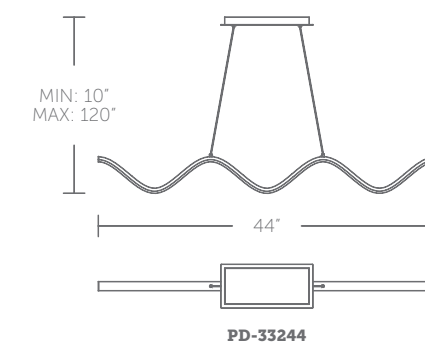

See complementary pieces on page 8-9.

PD-33244-BN shown

“Sleek slinky metal with a complementary silicone diffuser illuminates as an eye-catching pendant, perfect for lighting islands, counters and bars.”

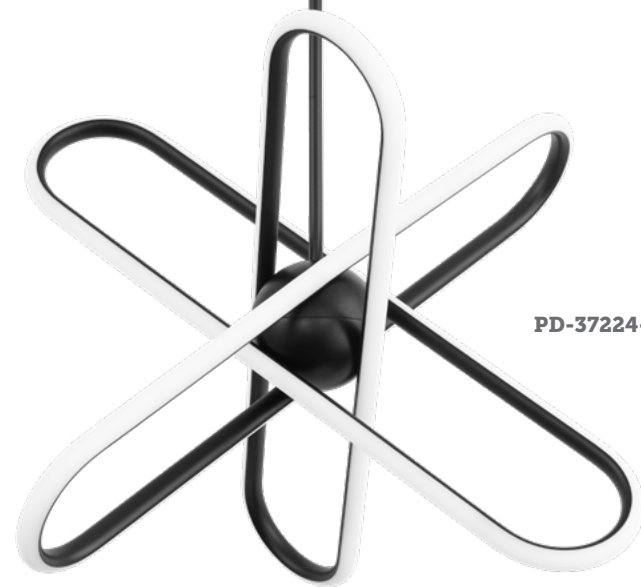

PD-37224-BK shown



TITLE 24  
CALIFORNIA



## 24" LED PENDANT

- Omnidirectional diffused illumination
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 50,000 hours  
Input: 120V/277V

**PD-37224:** Size: 24" Watt: 34W  
LED Lumens: 3,500 Delivered Lumens: 1,897

### Finish





**BK:**  
Black



**BN:**  
Brushed Nickel

Example: **PD-37224-BK**

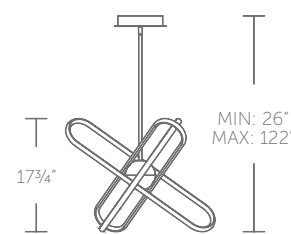

PD-37224



PD-37224-BN shown



# TIGHTROPE



PD-35246-BK shown

“Extraordinary curved illuminated silicone wrapped around a metal bar for the perfect, eye-catching luminaire above kitchen islands, bars and counters.”



PD-35246-BK shown



TITLE 24  
CALIFORNIA



## 46" LED PENDANT

- Omnidirectional diffused illumination
- Adjustable silicone diffuser to create desired look
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary universal 120V-220V-277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish

**BK:**  
Black

Example: PD-35246-BK

**PD-35246:** Size: 46" Watt: 30W  
 LED Lumens: 4,000 Delivered Lumens: 2,145

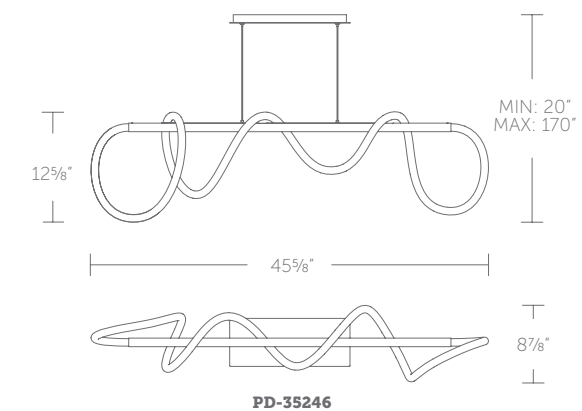

PD-35246

# MAMBA



PD-71226-BK shown



TITLE 24  
CALIFORNIA



## 26" LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PD-71226:** Size: 26" Watt: 49W  
 LED Lumens: 3,869 Delivered Lumens: 2,145

### Finish





**BK:**  
Black



**BN:**  
Brushed Nickel

Example: **PD-71226-BK**

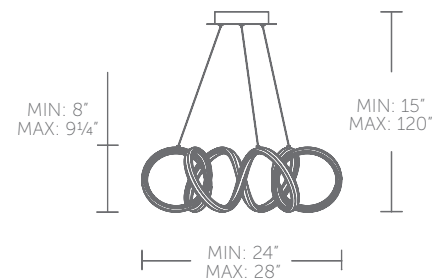

PD-71226



“ An impressive modulating scrollwork defined by strong lines of illumination that celebrate infinity and modernity. ”

PD-71226-BN shown



PD-73242-BK/GL shown

“ Omnidirectional diffused illumination with a jaw-dropping motif. Three orbital rings showcased within a stunning geometrical form add stylish architecture and gorgeous illumination to your space. ”



PD-73242-BK/GL shown



TITLE 24  
CALIFORNIA



## 42" LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a 120V driver




Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 50,000 hours  
Input: 120V

### Finish

**BK/GL:**  
Black/Gold Leaf  
Example: PD-73242-BK/GL

**PD-73242:** Size: 43" Watt: 44W  
LED Lumens: 4,300 Delivered Lumens: 2,136

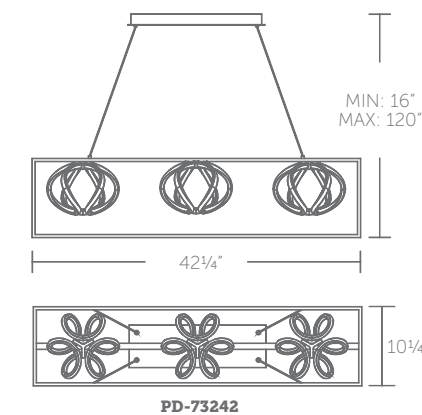

PD-73242



See complementary pieces on page 96-97.



PD-97218-BK/GO/AB shown




## 18" LED PENDANT

- Downlight with etched acrylic diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Canopy conceals a 120V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

**PD-97218:** Size: 18" Watt: 15W  
 LED Lumens: 1,500 Delivered Lumens: 907

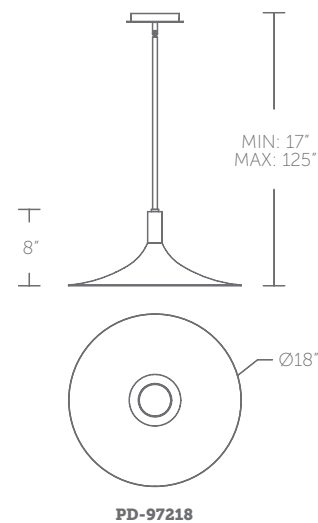

### Finish



**BK/GO/AB:**  
 Black/Gold/Aged Brass

Example: **PD-97218-BK/GO/AB**



“A regal black spun metal shade with a gold painted interior and etched opal glass make for a fine aged brass pendant.”

PD-97218-BK/GO/AB shown

# PAVILLION



PD-65244-BK/AB shown

“Curvy metal roof houses etched acrylic luminaire with undulating flair and visual excitement.”



PD-65244-BK/AB shown



TITLE 24  
CALIFORNIA



## 44" LED PENDANT

- Downlight with etched acrylic diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary universal 120V-220V-277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish

**BK/AB:**  
 Black/Aged Brass  
 Example: PD-65244-BK/AB

**PD-65244:** Size: 44" Watt: 30W  
 LED Lumens: 2,240 Delivered Lumens: 1,728

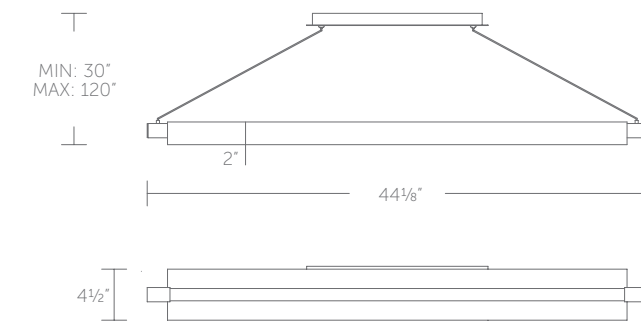

PD-65244

# PARALLAX



PD-73155-AB shown



PD-73155-BN shown



TITLE 24  
CALIFORNIA



## 55" LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish

- AB:** Aged Brass
- BK:** Black
- BN:** Brushed Nickel

Example: **PD-73155-BK**

**PD-73155:** Size: 55" Watt: 44W  
 LED Lumens: 2,496 Delivered Lumens: 1,653

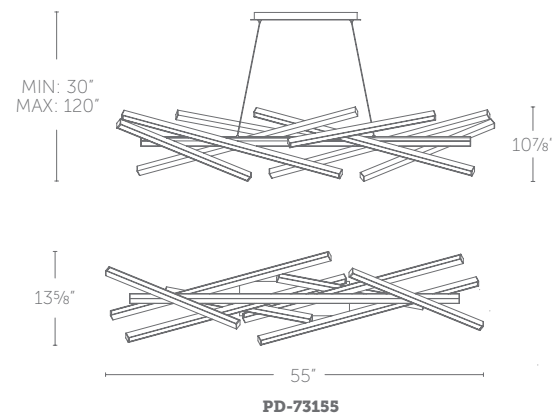

See complementary pieces on page 252-253.



“A complex array of slender light bars create crisp lines, adding a sculptural feel to any space.”

PD-73155-BK shown

# PARALLAX



PD-73139-AB shown

“ Effortlessly deliberate. Unparalleled. ”



PD-73139-BK shown

PD-73129-BN shown



TITLE 24  
CALIFORNIA

## 29" & 39" LED PENDANT

- Rotatable light bar to create desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish


**AB:**  
Aged Brass

**BK:**  
Black

**BN:**  
Brushed Nickel

Example: **PD-73139-AB**

**PD-73129:** Size: 29" Watt: 37W  
 LED Lumens: 2,071 Delivered Lumens: 1,302  
**PD-73139:** Size: 39" Watt: 42W  
 LED Lumens: 2,265 Delivered Lumens: 1,523

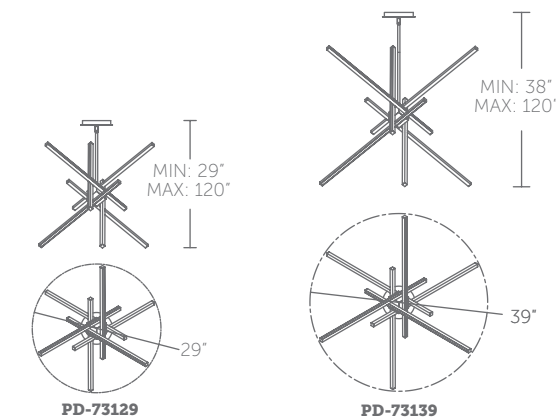

See complementary pieces on page 130-131.

# SIRIUS



PD-81118-BK shown

PD-81131-WT shown



## 18", 24" & 31" LED PENDANT

- Up and downlight with silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a 120V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish


- AL:** Brushed Aluminum
- BK:** Anodized Black
- WT:** White

Example: PD-81124-AL

**PD-81118:** Size: 18" Watt: Up to 36W  
 LED Lumens: Up to 2,493  
 Delivered Lumens: Up to 1,218

**PD-81124:** Size: 24" Watt: Up to 49W  
 LED Lumens: Up to 3,480  
 Delivered Lumens: Up to 1,725

**PD-81131:** Size: 31" Watt: Up to 70W  
 LED Lumens: Up to 4,763  
 Delivered Lumens: Up to 2,054

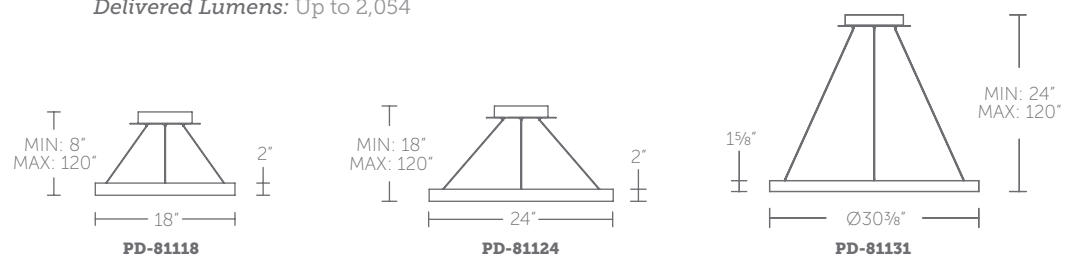

“ Full circle. A simple glowing halo completes. ”

PD-81124-AL shown





“ Graceful. Continuous and captivating. ”

PD-83128-AB shown



PD-83128-BK shown



## 28" LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary universal 120V-220V-277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish

- AB:** Aged Brass
- BK:** Black

**PD-83128:** Size: 28" Watt: 47W  
 LED Lumens: 3,330 Delivered Lumens: 1,668


Example: **PD-83128-AB**

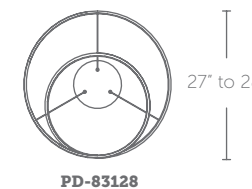

PD-83128



See complementary pieces on page 236-237.

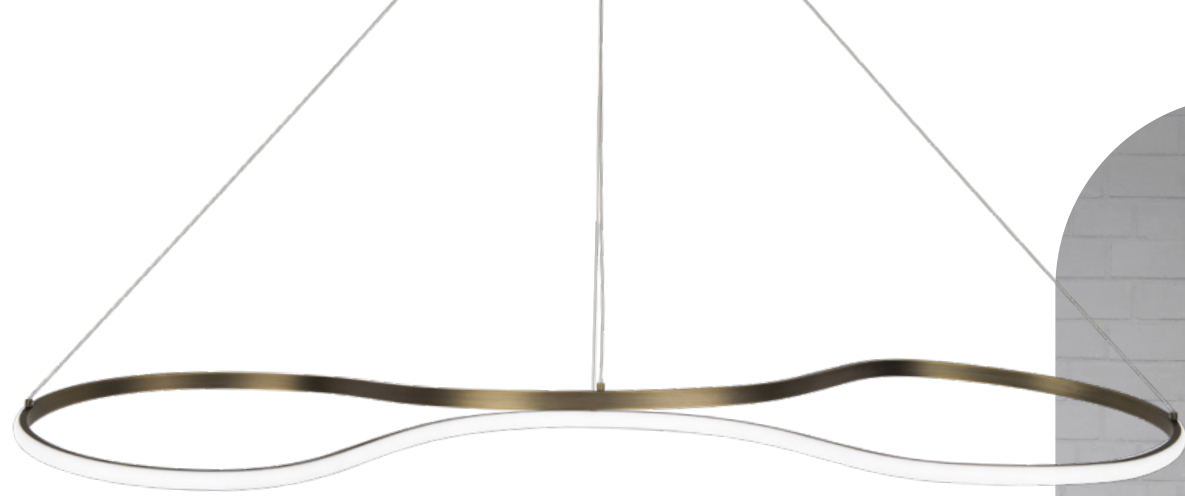

PD-83148-AB shown



## 48" LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V


### Finish

 **AB:**  
Aged Brass

 **BK:**  
Black

Example: **PD-83148-BK**

**PD-83148:** Size: 48" Watt: 44W  
 LED Lumens: 3,375 Delivered Lumens: 1,929

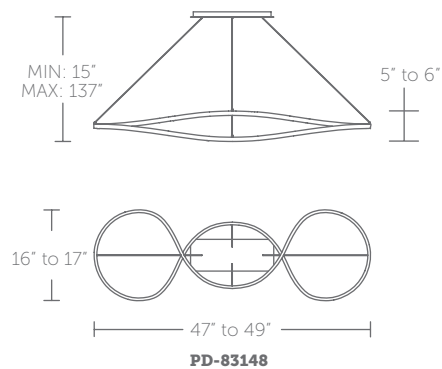

See complementary pieces on page 30-31.



“Graceful. Continuous and captivating.”

PD-83148-BK shown

# EFFERVESCENT



PD-97145-BK shown

“ Glittering, breathtaking presentation of light. ”



PD-97145-AL shown



## 45" LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look, black aircraft cable for BK finish and clear aircraft cable for AL finish
- Slide-on rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver





Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish

- AL:** Brushed Aluminum
- BK:** Black

Example: PD-97145-BK

PD-97145: Size: 45" Watt: 33W  
 LED Lumens: 2,970 Delivered Lumens: 2,758

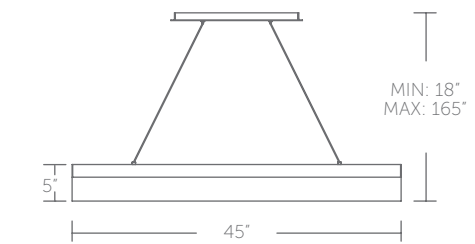



PD-75126-BK shown



TITLE 24  
CALIFORNIA

## 26" LED PENDANT

- Double fabric shades
- Downlight illumination with acrylic diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V/277V


PD-75126: Size: 26" Watt: 25W  
 LED Lumens: 2,350 Delivered Lumens: 874

### Finish



BK:  
Black

Example: PD-75126-BK

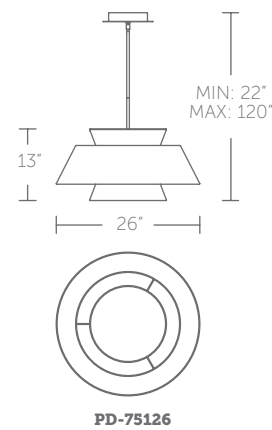

“Retro mid-century modern fashion statement.”

PD-75126-BK shown



“Sophisticated refinement.  
Tailored and bespoke.”

PD-13720-BK shown



PD-13714-BK shown



PD-13726-BN shown



TITLE 24  
CALIFORNIA

## 14", 20" & 26" LED PENDANT

- Fabric shade with etched acrylic diffuser in three coordinating fabric and hardware color combinations
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- ACLED driverless technology



Color Temp: 2700K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 50,000 hours  
Input: 120V

### Finish

**BK:**  
Black


**BN:**  
Brushed Nickel

Example: **PD-13720-BK**

**PD-13714:** Size: 14" Watt: Up to 31W  
LED Lumens: Up to 2,405 Delivered Lumens: Up to 2,205


**PD-13720:** Size: 20" Watt: Up to 36W  
LED Lumens: Up to 2,800 Delivered Lumens: Up to 2,285

**PD-13726:** Size: 26" Watt: Up to 48W  
LED Lumens: Up to 4,200 Delivered Lumens: Up to 3,419

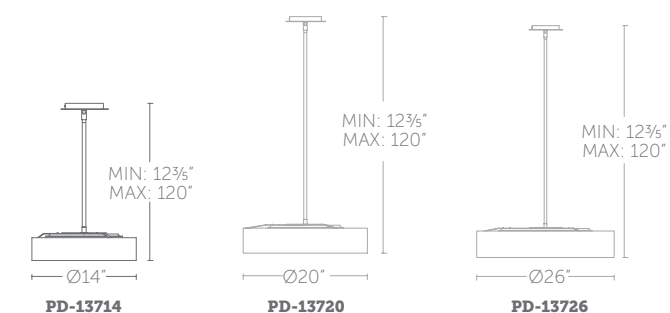


See complementary pieces  
on page 190-191.

# ATLAS

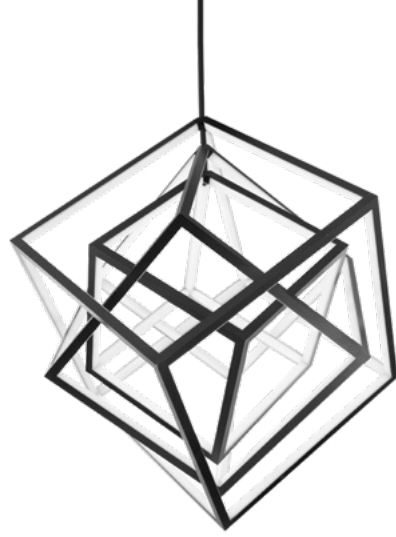

PD-51030-BK shown

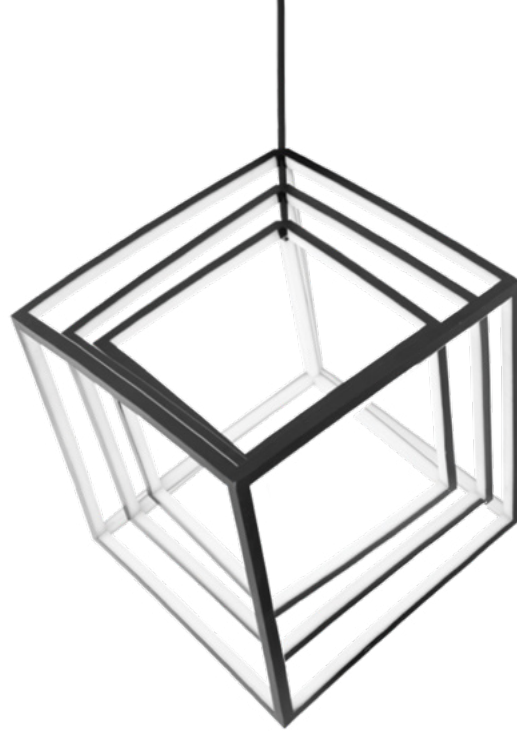

PD-51050-BK shown



TITLE 24  
CALIFORNIA

## 30", 41" & 50" LED PENDANT

- Cubes rotate independently for creative display options
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver
- PD-51050-BK for special order only



Color Temp: 3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V


### Finish

 **BK:**  
 Black  
 Example: PD-51041-BK

**PD-51030:** Size: 30" Watt: 30W  
 LED Lumens: 4,500 Delivered Lumens: 1,600

**PD-51041:** Size: 41" Watt: 42W  
 LED Lumens: 5,600 Delivered Lumens: 2,246

**PD-51050:** Size: 50" Watt: 60W  
 LED Lumens: 6,500 Delivered Lumens: 3,000

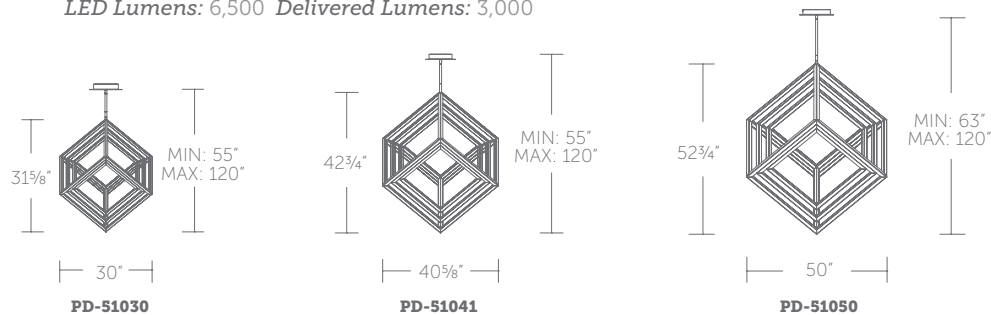

“Reminiscent of the brilliant modern artwork of Eva Rothschild, this unique pendant features three illuminating cubes that move independently. The black finish provides striking contrast with the luminous lines of light. A recognizable bold design.”

PD-51041-BK shown



“ *Delicately twisting.  
As timeless as a wedding band.* ”

PD-18041-BK shown

PD-18041-CH shown



## 41" LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V


**PD-18041:** Size: 41" Watt: 53W  
 LED Lumens: 3,900 Delivered Lumens: 1,636

### Finish

- BK:**  
Black
- CH:**  
Chrome

Example: **PD-18041-CH**

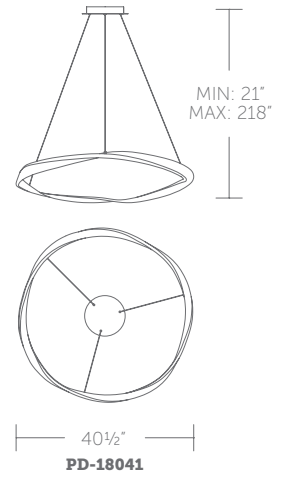

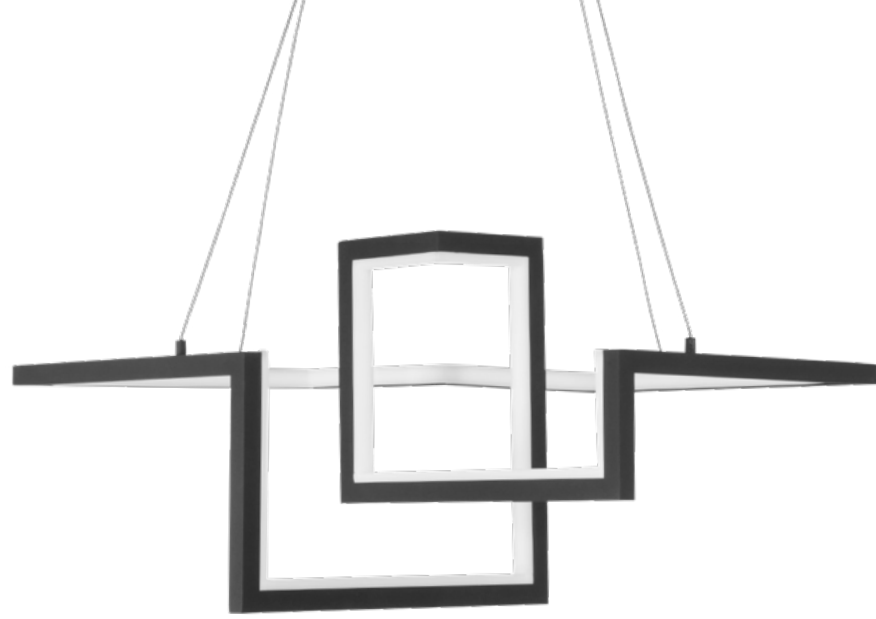

PD-17023-BK shown





## 23" LED PENDANT

- Omnidirectional diffused illumination
- Asymmetrical, seamless and continuous design
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 50,000 hours  
 Input: 120V-277V

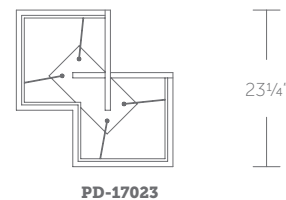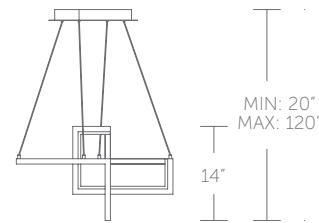

PD-17023: Size: 23" Watt: 45W  
 LED Lumens: 5,600 Delivered Lumens: 2,274

### Finish



Example: PD-17023-BK



“ Opportunity lights around every turn. Bauhaus inspired modern pendant. ”

PD-17023-BK shown





PD-16063-BK shown



## 63" LED PENDANT

- Light source rotates 300 degrees
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a 120V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish

**AL:**  
Brushed Aluminum

**BK:**  
Black


Example: **PD-16063-BK**

**PD-16063:** Size: 63" Watt: 23W  
 LED Lumens: 2,300 Delivered Lumens: 1,355

### Rotatable:



See complementary pieces on page 224-225.

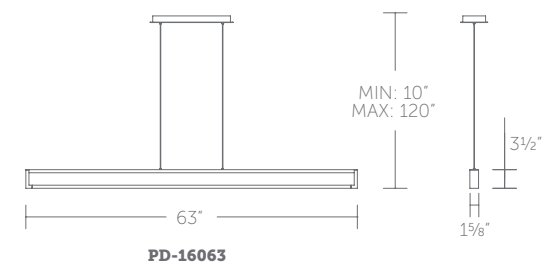

“Futuristic Industrial.  
 Segmented powerful design.  
 Adjusts to your demands.”

PD-16063-AL shown



PD-14032-BK shown

# LUNE

## 32" LED PENDANT

- Light source rotates 300 degrees
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a 120V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

**PD-14032:** Size: 32" Watt: 28W  
 LED Lumens: 3,000 Delivered Lumens: 1,832




### Finish

- AL:** Brushed Aluminum
- BK:** Black

Example: **PD-14032-BK**



### Rotatable:

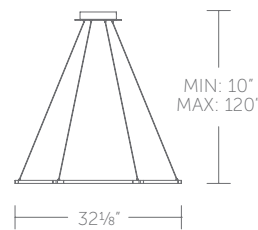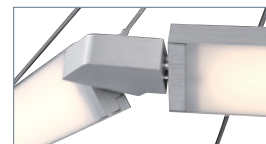

PD-14032



“ Clear-cut, poised and powerful design. Field adjustable. ”



PD-15052-AL shown

# LUNE

## 52" LED PENDANT

- Light source rotates 300 degrees
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a 120V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

**PD-15052:** Size: 52" Watt: 46W  
 LED Lumens: 4,600 Delivered Lumens: 3,559



### Finish

- AL:** Brushed Aluminum
- BK:** Black

Example: **PD-15052-BK**



### Rotatable:

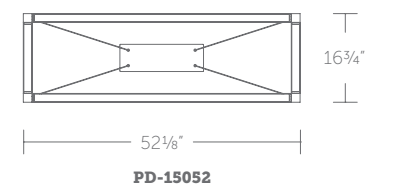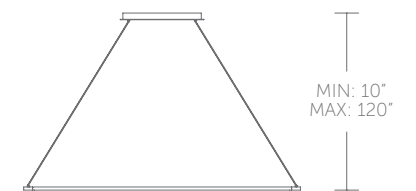

PD-15052



“ Slim, open, geometric styling. Adjustable. ”

# BISTRO



PD-20010-AB shown



PD-20014-AB shown



TITLE 24  
CALIFORNIA

## 4 LIGHTS, 10" & 14" LED PENDANT

- Mouth blown glass with unique hand crafted halo band
- Open bottom for ease of maintenance
- Low profile, powered aircraft cables for an ultra-clean look
- Three 12" and one 6" downrods included for PD-20004 only (additional downrods available)
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V




### Finish

 **AB:**  
Aged Brass  
 Example: **PD-20004-AB**

**PD-20010:** Size: 10" Watt: 9W  
 LED Lumens: 680 Delivered Lumens: 259


**PD-20014:** Size: 14" Watt: 9W  
 LED Lumens: 680 Delivered Lumens: 281

**PD-20004:** Lights: 4 Watt: 23W  
 LED Lumens: 1,819 Delivered Lumens: 834

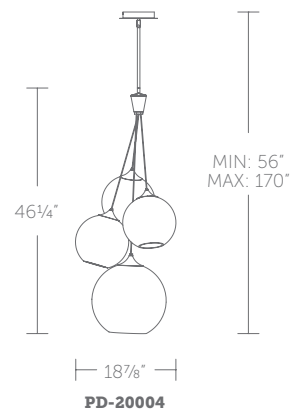

“ Classic forms elevated. ”

PD-20004-AB shown

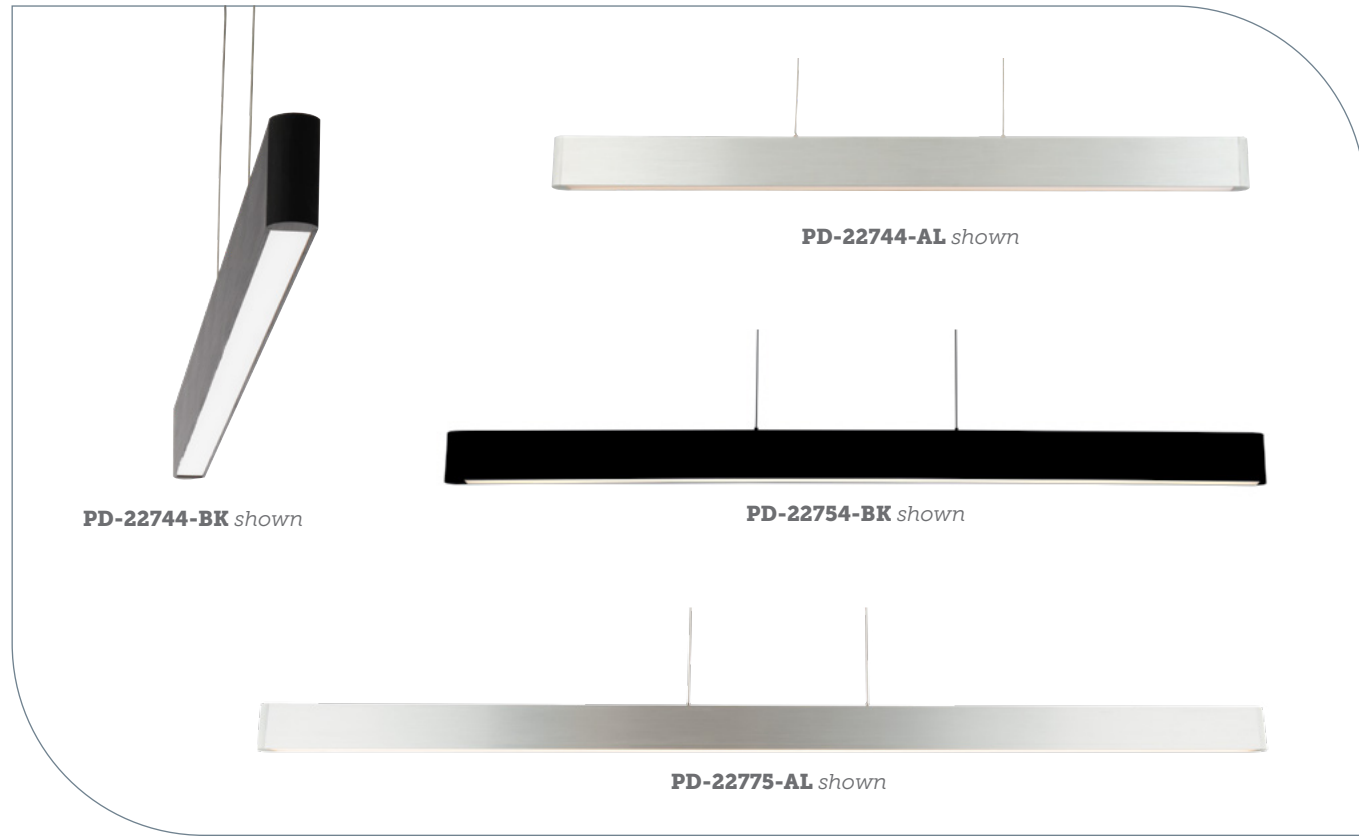

# VOLO

## 44", 54" & 75" LED PENDANT

- Downtight illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver
- 0-10V dimming not available for PD-22775

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V-277V

### Finish

- AL:** Brushed Aluminum
- BK:** Black

Example: **PD-22744-BK**


**PD-22744:** Size: 44" Watt: 24W  
 LED Lumens: 1,299 Delivered Lumens: 1,034

**PD-22754:** Size: 54" Watt: 30W  
 LED Lumens: 2,150 Delivered Lumens: 1,740

**PD-22775:** Size: 75" Watt: 44W  
 LED Lumens: 2,671 Delivered Lumens: 1,888



“Wishful lighting. Ultra thin pendant for the discerning minimalist.”

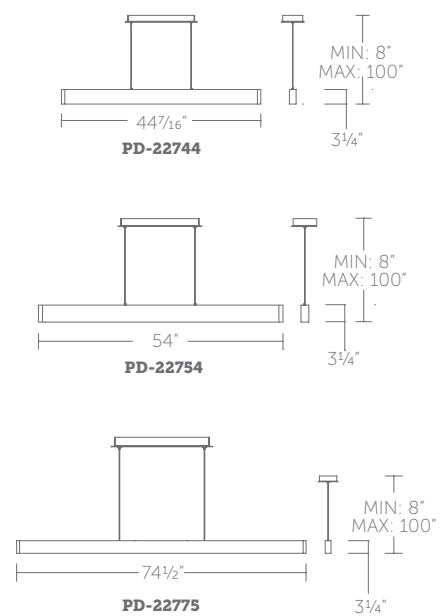

# CORSO

## 18", 32" & 43" LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 75,000 hours  
 Input: 120V-277V

### Finish

- AL:** Brushed Aluminum
- BK:** Black
- WT:** White

Example: **PD-33732-BK**


**PD-33718:** Size: 18" Watt: 22W  
 LED Lumens: 1,495 Delivered Lumens: 940


**PD-33732:** Size: 32" Watt: 88W  
 LED Lumens: 6,340 Delivered Lumens: 4,435

**PD-33743:** Size: 43" Watt: 125W  
 LED Lumens: 11,115 Delivered Lumens: 7,300



“Cleverly hidden LED modules and a circular frosted diffuser floating inside a halo of spun aluminum.”

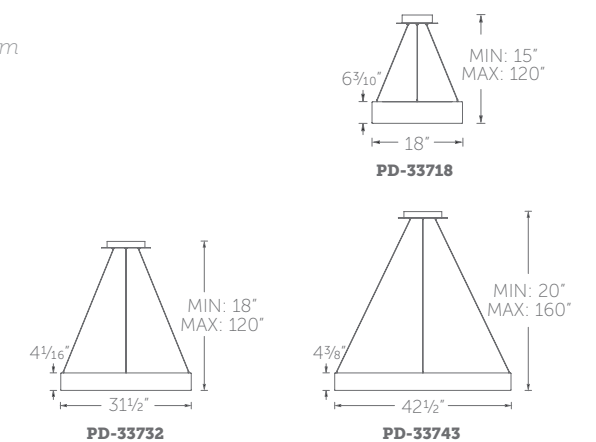

 See complementary pieces on page 268.

# VORNADO



“Eye-catching, roller coaster-like design.”

PD-87723-CH shown



PD-87720-WT shown



PD-87735-CH shown



## 20", 23" & 35" LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% – 10% ELV, 100% – 5% 0-10V  
 Rated Life: 60,000 hours  
 Input: 120V-277V

**PD-87720:** Size: 20" Watt: 31W  
 LED Lumens: 2,825 Delivered Lumens: 2,075  
**PD-87723:** Size: 23" Watt: 52W  
 LED Lumens: 5,106 Delivered Lumens: 3,110  
**PD-87735:** Size: 35" Watt: 52W  
 LED Lumens: 5,278 Delivered Lumens: 3,550

### Finish

- CH:** Chrome
- WT:** White

Example: **PD-87723-CH**

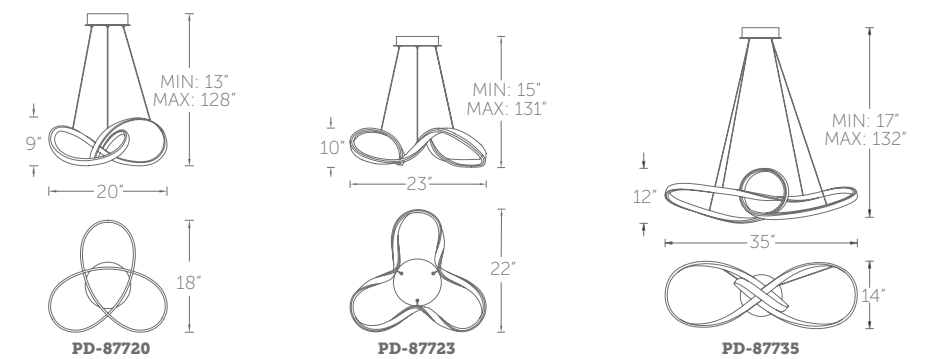

See complementary pieces on page 109.



PD-87729-CH shown

PD-87741-CH shown

# VORNADO

## 29" & 41" LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PD-87729:** Size: 29" Watt: 87W  
 LED Lumens: 7,766 Delivered Lumens: 5,375

**PD-87741:** Size: 41" Watt: 87W  
 LED Lumens: 7,818 Delivered Lumens: 5,861


### Finish

**CH:**  
 Chrome

Example: **PD-87729-CH**



“ Bands of silver and light twist in and out like a Mobius strip. ”

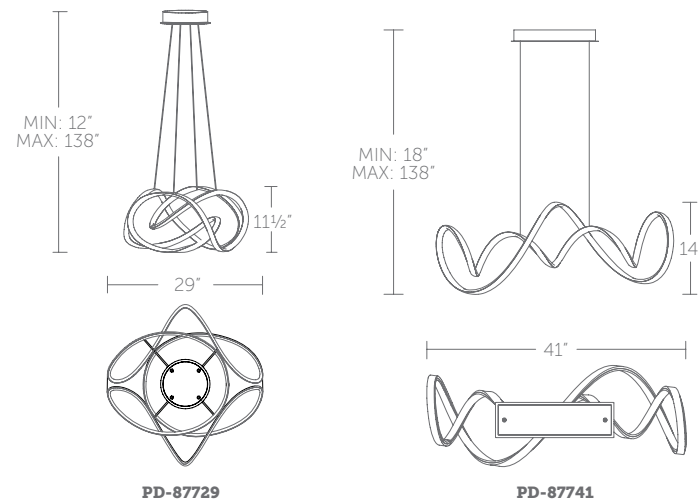

See complementary pieces on page 54-55.



PD-72718-AL shown

PD-72718-BK shown

PD-72724-WT shown

# VIDA

## 18" & 24" LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 52,000 hours  
 Input: 120V-277V

**PD-72718:** Size: 18" Watt: 33W  
 LED Lumens: 2,450 Delivered Lumens: 1,755

**PD-72724:** Size: 24" Watt: 43W  
 LED Lumens: 3,235 Delivered Lumens: 2,385



“ Refreshing take on a traditional shape. Finished in elegant black or white, in addition to brushed aluminum. Inside, a powerful integrated LED array projects flawless light. ”


### Finish

**AL:**  
 Brushed Aluminum

**BK:**  
 Black

**WT:**  
 White

Example: **PD-72718-AL**

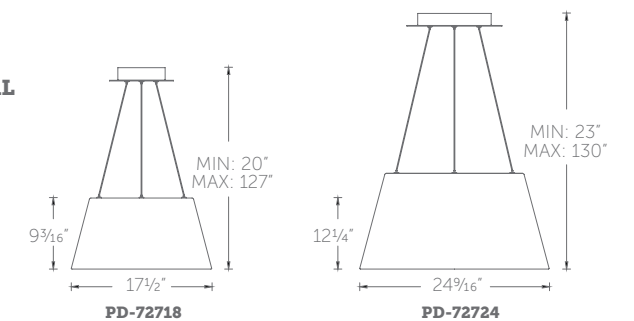



PD-60964-BK shown

# DIVERGENCE

## 44" & 64" LED PENDANT

- Downlight illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a 120V driver for PD-60944
- Canopy conceals a proprietary universal 120V-220V-277V driver for PD-60964


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV (44")  
 100% - 10% ELV, 100% - 5% 0-10V, 100% - 10% TRIAC (64")  
 Rated Life: 50,000 hours  
 Input: 120V (44"), 120V-277V (64")

**PD-60944:** Size: 44" Watt: 78W  
 LED Lumens: 7,458 Delivered Lumens: 4,293  
**PD-60964:** Size: 64" Watt: 90W  
 LED Lumens: 8,550 Delivered Lumens: 5,603

### Finish



Example: PD-60944-CH

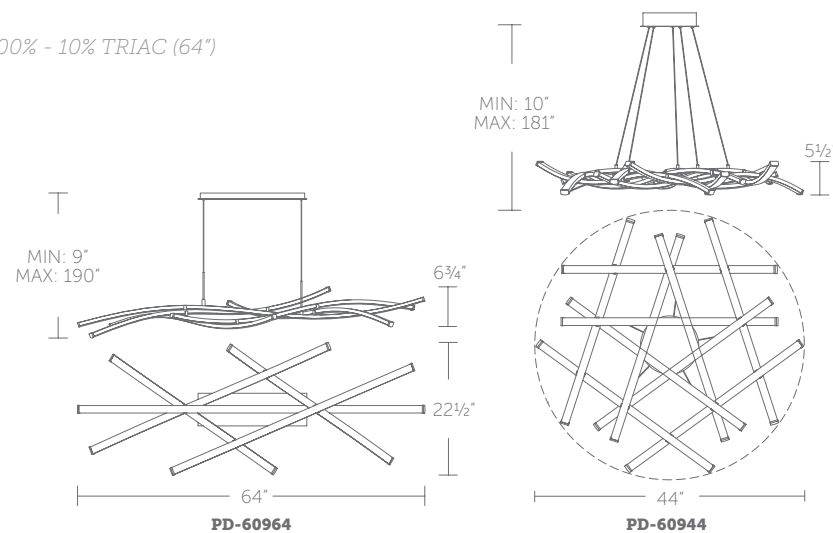

PD-60944-CH shown

“ Flowing bands of light converge in this unique and striking pendant. ”



“ The perfect sphere. ”

PD-52313-BN shown



PD-52307-WT shown



PD-52310-AB shown



## 7", 10" & 13" LED PENDANT

- Downlight with mouth blown opal glass diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- 4" junction box conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K (2700K / 3500K special order)  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 70,000 hours  
 Input: 120V-277V

**PD-52307:** Size: 7" Watt: 10W  
 LED Lumens: 777 Delivered Lumens: 588

**PD-52310:** Size: 10" Watt: 14W  
 LED Lumens: 905 Delivered Lumens: 685

**PD-52313:** Size: 13" Watt: 14W  
 LED Lumens: 907 Delivered Lumens: 715




### Finish

**AB:**  
Aged Brass

**BN:**  
Brushed Nickel


**WT:**  
White

Example: **PD-52313-BN**  
 For 2700K add "-27"; 3500K add "-35"  
 before the finish: **PD-52313-27-BN**

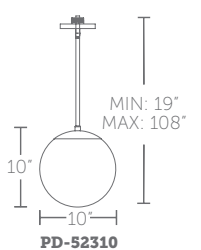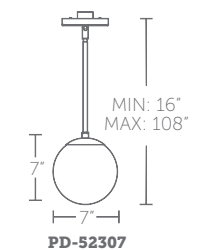

See complementary pieces on page 271.



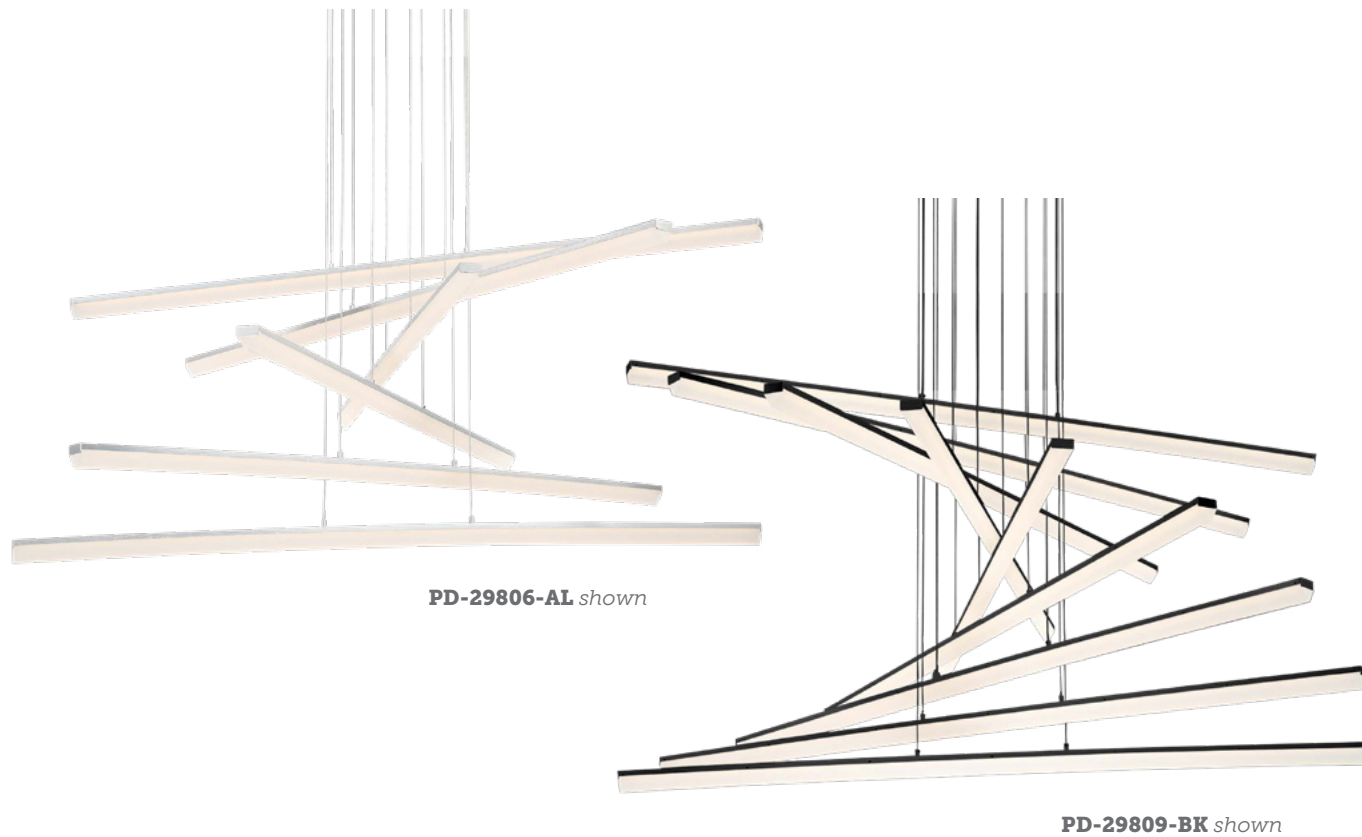

PD-29806-AL shown

PD-29809-BK shown

# STACK

## 3, 6 & 9 LIGHT LED CHANDELIERS

- Height and slope of each strip can be individually adjusted for personalization
- Low profile, adjustable powered aircraft cables for an ultra-clean look, black aircraft cable for BK finish and clear aircraft cable for AL finish
- May be mounted on a sloped ceiling
- Canopy conceals proprietary universal 120V-220V-277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**Finish**  
**AL:** Brushed Aluminum  
**BK:** Black  
 Example: **PD-29803-AL**

**PD-29803:** Lights: 3 Watt: 42W  
 LED Lumens: 4,938 Delivered Lumens: 3,950



**PD-29806:** Lights: 6 Watt: 84W  
 LED Lumens: 9,876 Delivered Lumens: 7,900

**PD-29809:** Lights: 9 Watt: 126W  
 LED Lumens: 14,814 Delivered Lumens: 11,850

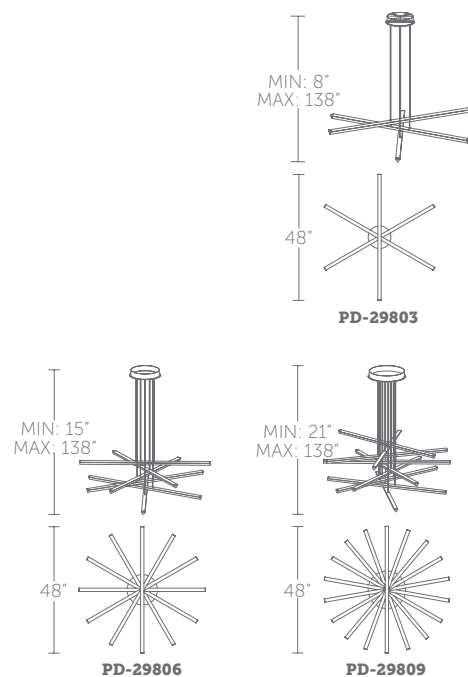

“ A clean look no matter how you hang it. ”

PD-29803-AL shown

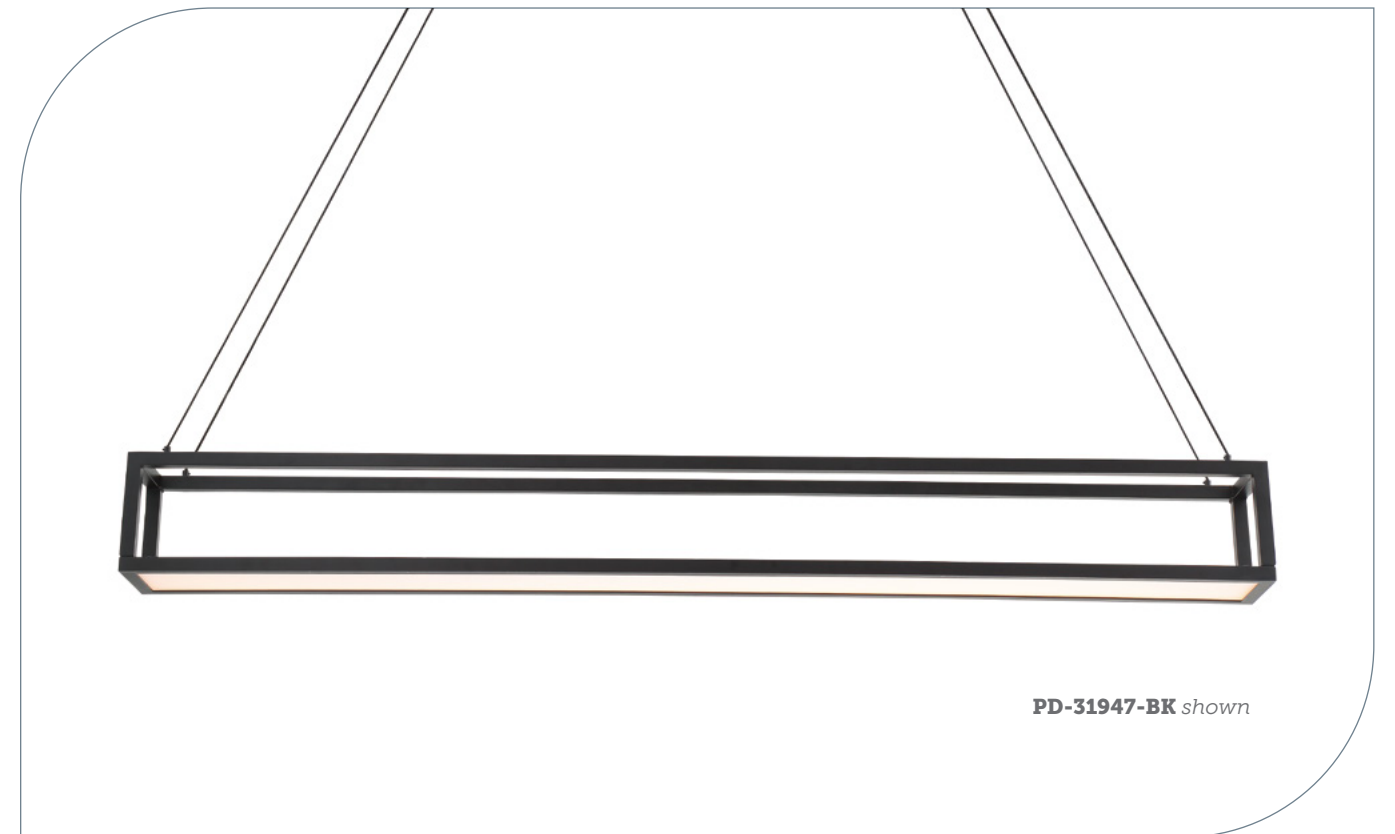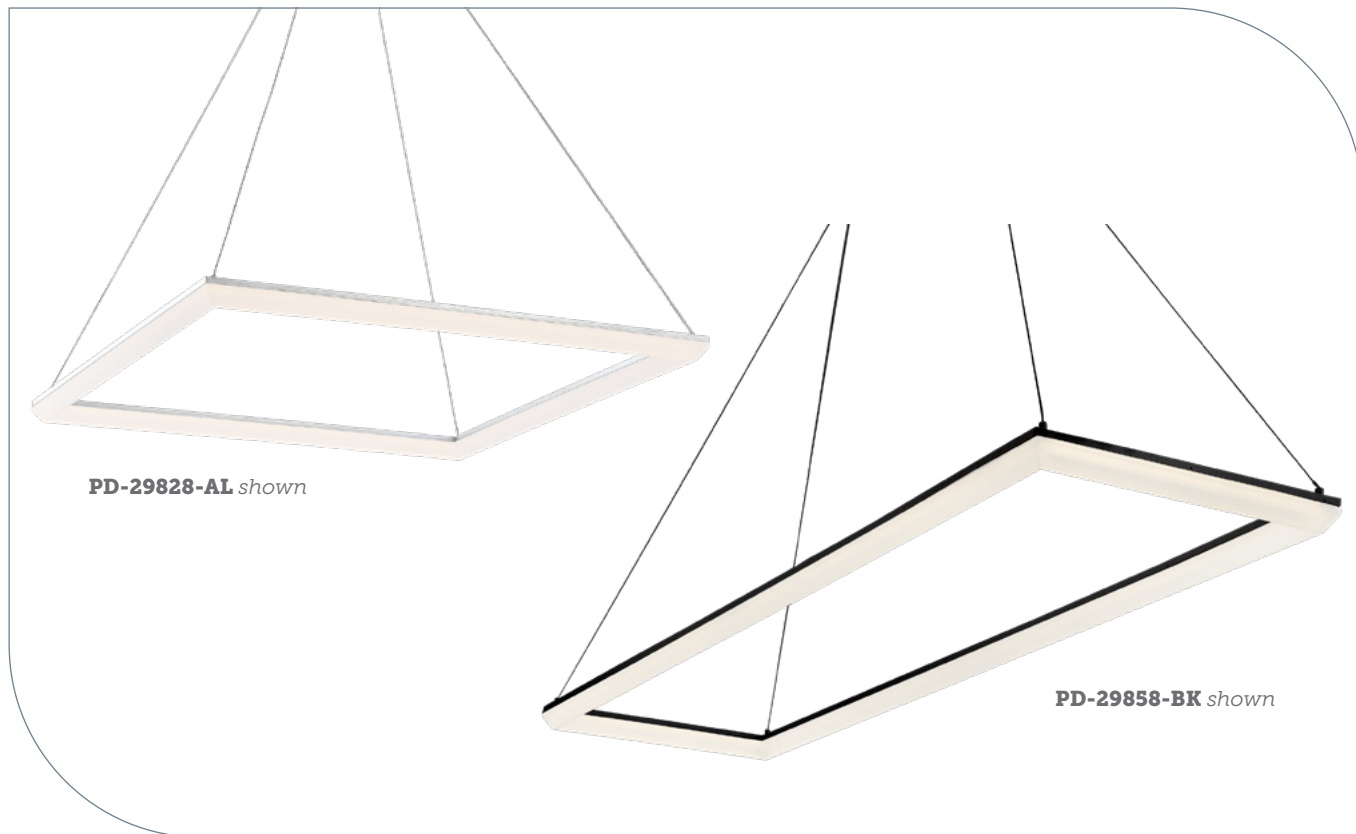

# FRAME

## 28" & 58" LED PENDANT

- Downlight illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PD-29828:** Size: 28" Watt: 55W  
 LED Lumens: 6,334 Delivered Lumens: 5,131  
**PD-29858:** Size: 58" Watt: 58W  
 LED Lumens: 7,160 Delivered Lumens: 5,800


### Finish

- AL:** Brushed Aluminum
- BK:** Black

Example: **PD-29828-AL**



“Extruded acrylic diffuser with mitered edges evokes a clean, geometric look with powerful LED illumination projecting up to the rectilinear canopy.”

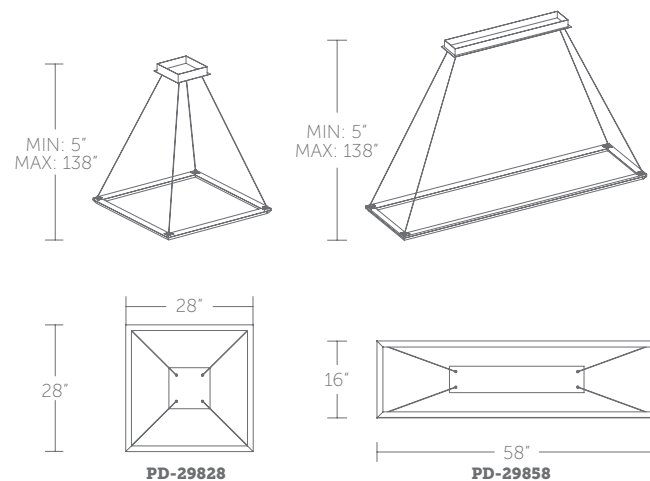

# TRICK BOX

## 47" LED PENDANT

- Up and downlight with edge-lit LED
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PD-31947:** Size: 47" Watt: 22W  
 LED Lumens: 2,125 Delivered Lumens: 1,212


### Finish

- BK:** Black

Example: **PD-31947-BK**



“Cutting edge illumination in a smart, geometric design.”

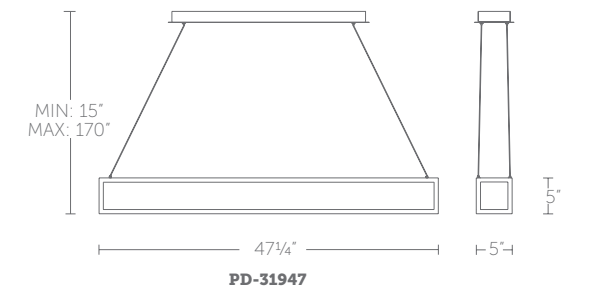

# SOLARIS



PD-94940- BK shown

“ Three rings. One perfect look. A true design statement. ”



PD-94940-CH shown

PD-94940-AB shown



## 40" LED PENDANT & CEILING MOUNT

- Three 12" and one 6" downrod included (additional downrods available)
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver





Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PD-94940:** Size: 40" Watt: 31W  
 LED Lumens: 2,098 Delivered Lumens: 1,329


### Finish

- AB:** Aged Brass
- BK:** Black
- CH:** Chrome

Example: **PD-94940- BK**

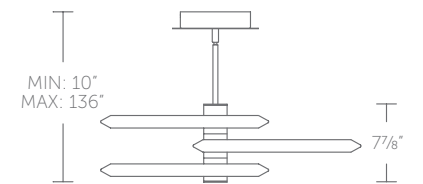

PD-94940

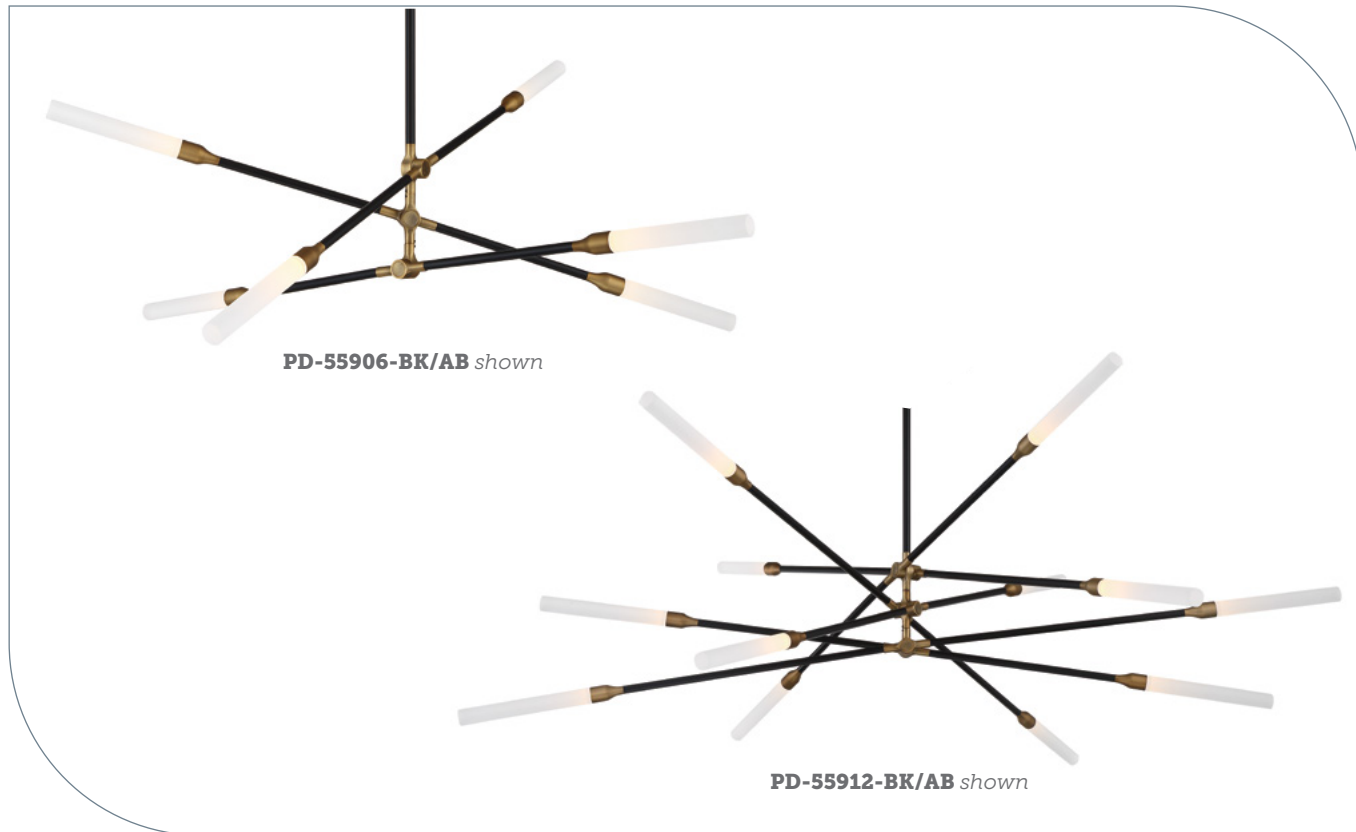

PD-55906-BK/AB shown

PD-55912-BK/AB shown

# HOUDINI

## 6 & 12 LIGHT LED CHANDELIER

- Rotatable light bar to create desired look
- Three 12 inch and one 6 inch rods included (additional extension rods available)
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 36,000 hours  
 Input: 120V-277V

### Finish


**BK/AB:**  
 Black/Aged Brass  
 Example: PD-59906-BK/AB

**PD-55906:** Lights: 6 Watt: 16W  
 LED Lumens: 685 Delivered Lumens: 427

**PD-55912:** Lights: 12 Watt: 31W  
 LED Lumens: 1,370 Delivered Lumens: 796

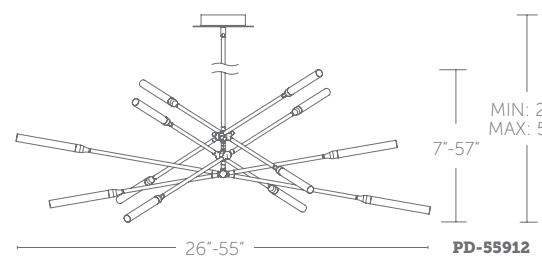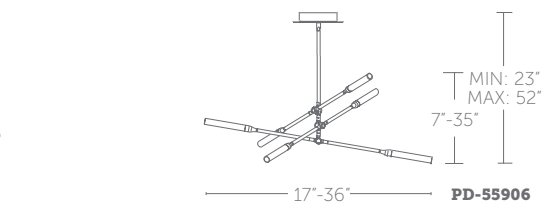

“ Waving wands deliver cutting edge LED magic. ”

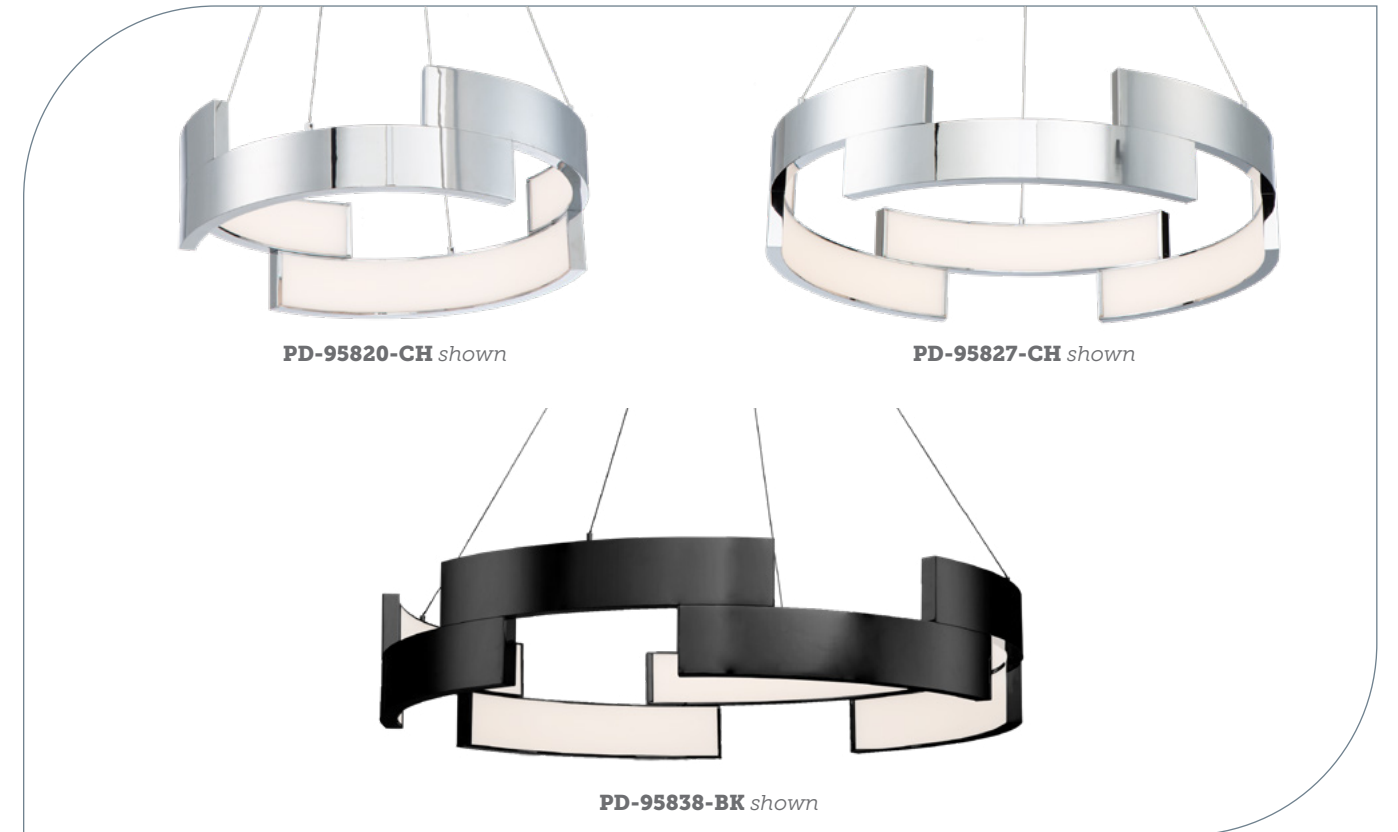

PD-95820-CH shown

PD-95827-CH shown

PD-95838-BK shown

# TRAP

## 20", 27" & 38" LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look, black aircraft cable for BK finish and clear aircraft cable for CH finish
- May be mounted on a sloped ceiling
- Canopy conceals proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish

**BK:**  
 Matte Black  
**CH:**  
 Chrome

Example: PD-95827-CH


**PD-95820:** Size: 20" Watt: 35W  
 LED Lumens: 2,488 Delivered Lumens: 1,914

**PD-95827:** Size: 27" Watt: 65W  
 LED Lumens: 4,759 Delivered Lumens: 3,953

**PD-95838:** Size: 38" Watt: 79W  
 LED Lumens: 5,580 Delivered Lumens: 4,293



“ Futuristic design meets top-tier technology. ”

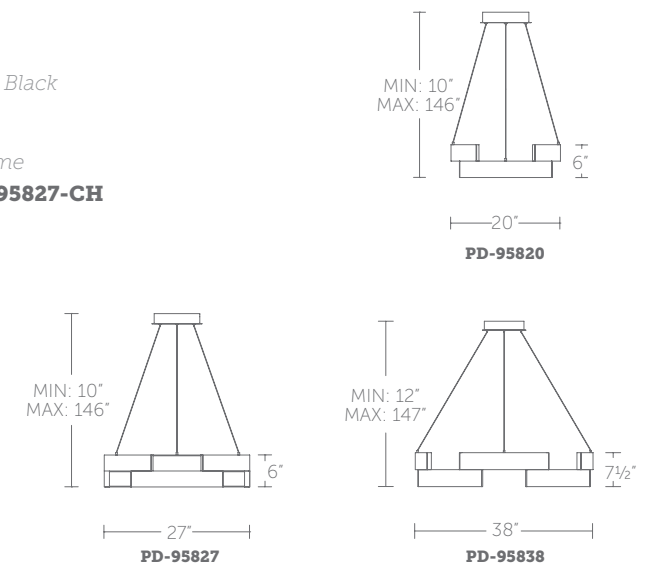



PD-47839-CH shown

# INTERLACE

## 28" & 39" LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 54,000 hours  
 Input: 120V-277V

**PD-47828:** Size: 28" Watt: 57W  
 LED Lumens: 4,853 Delivered Lumens: 3,263

**PD-47839:** Size: 39" Watt: 57W  
 LED Lumens: 4,734 Delivered Lumens: 3,241

### Finish




CH:  
Chrome




Example: PD-47828-CH



“ Delicate bands of light weave playfully in and out on this flowing modern design. A continuous construction, a flexible diffuser, and powered aircraft cable suspension complete an overall clean, seamless look. ”

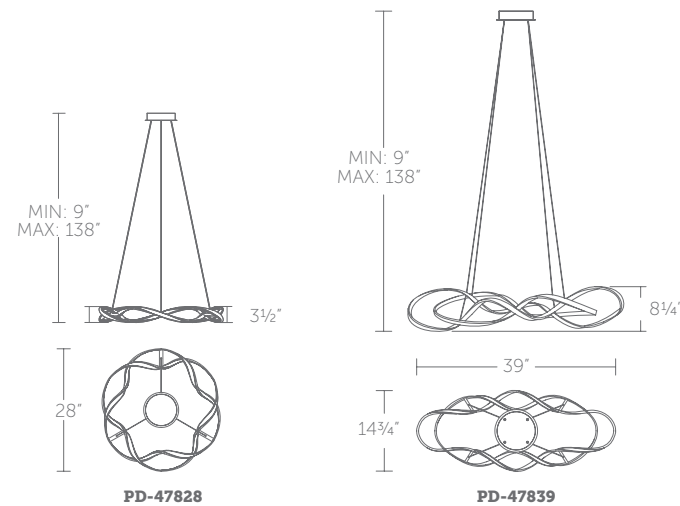


See complementary pieces on page 162-163.

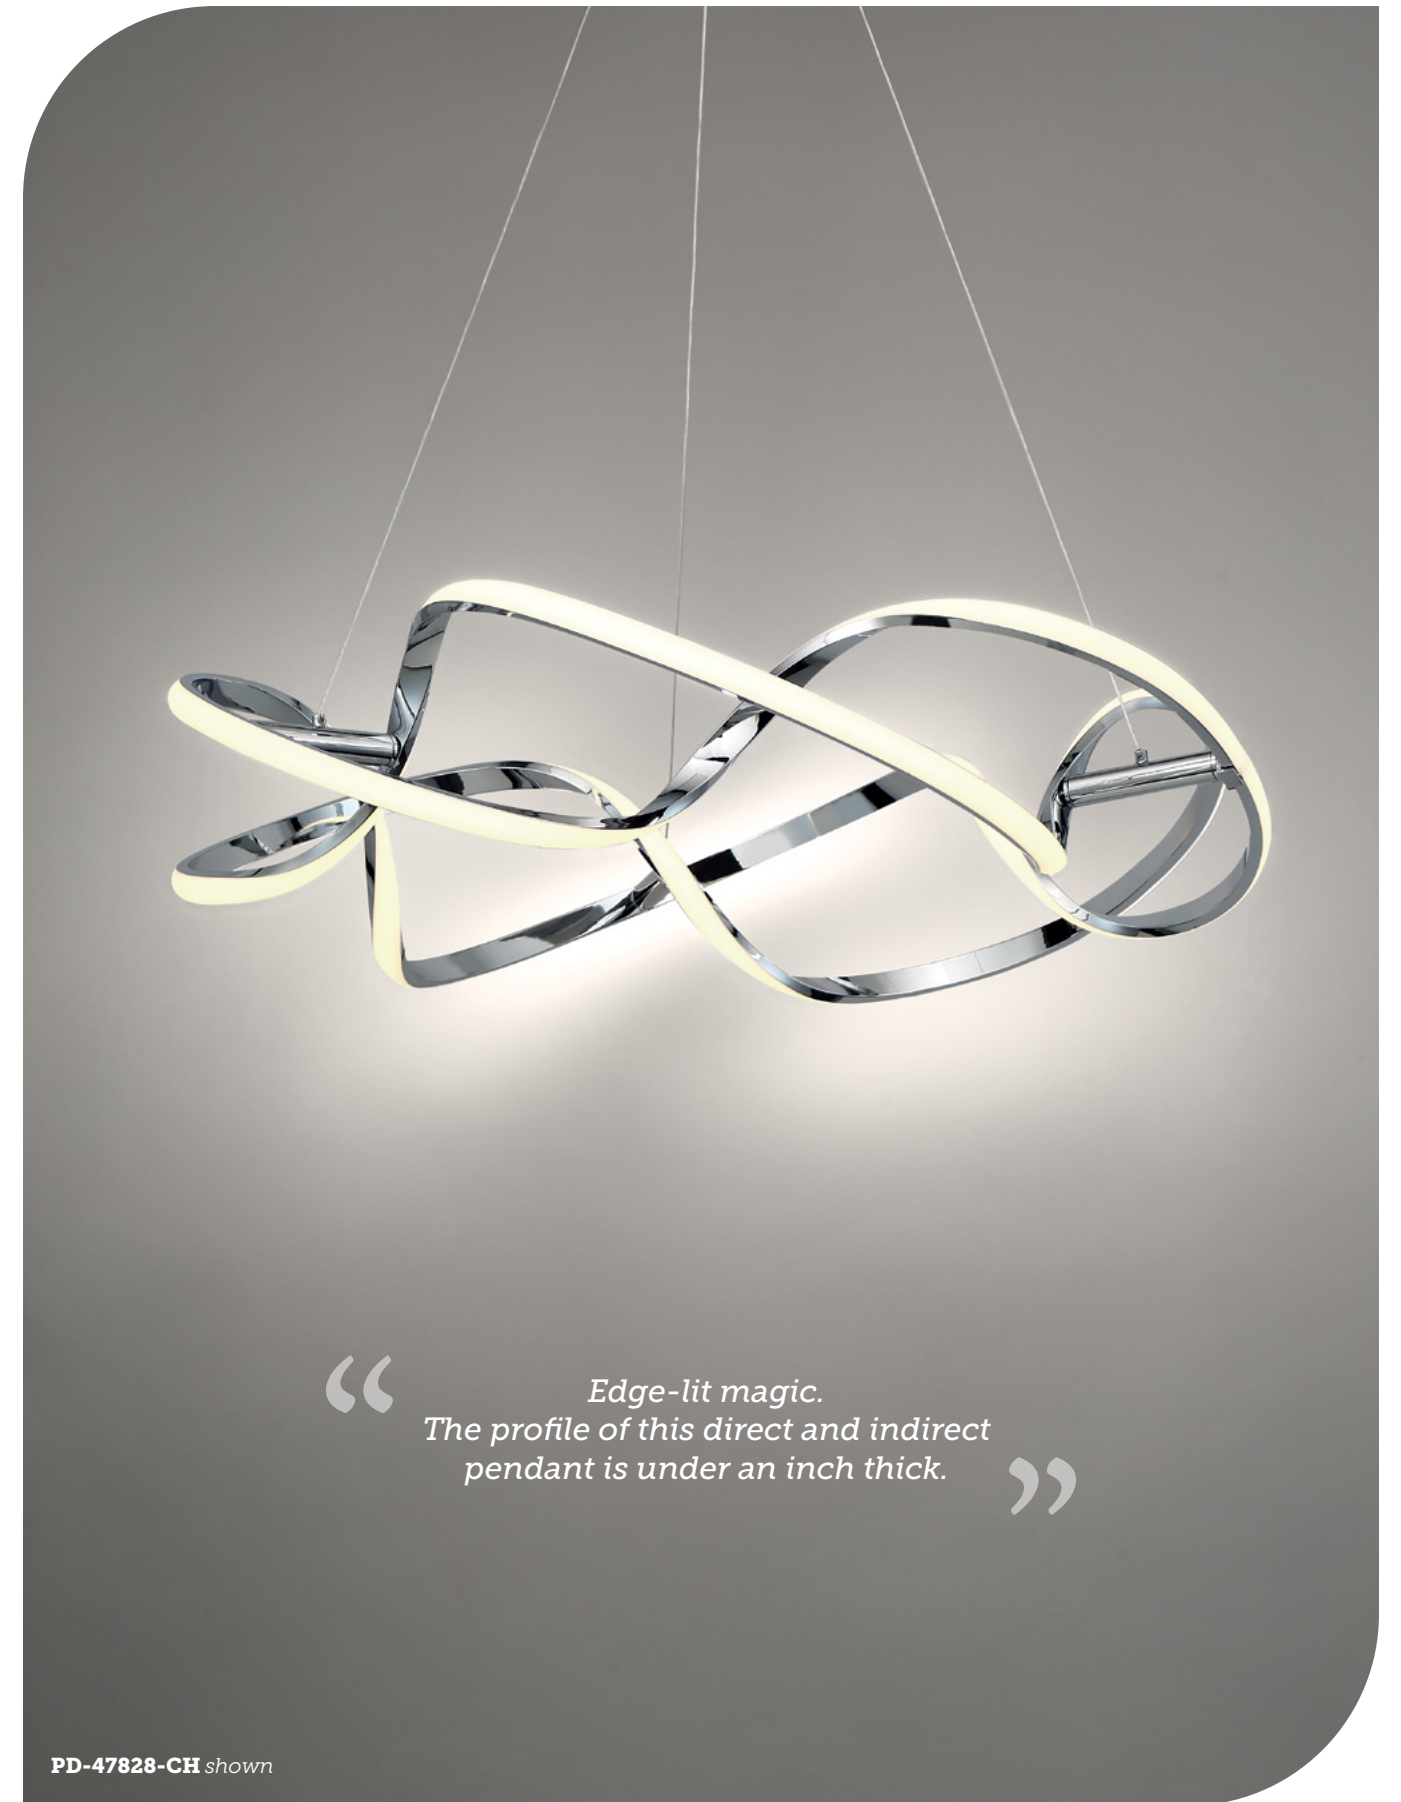

PD-47828-CH shown

“ Edge-lit magic. The profile of this direct and indirect pendant is under an inch thick. ”

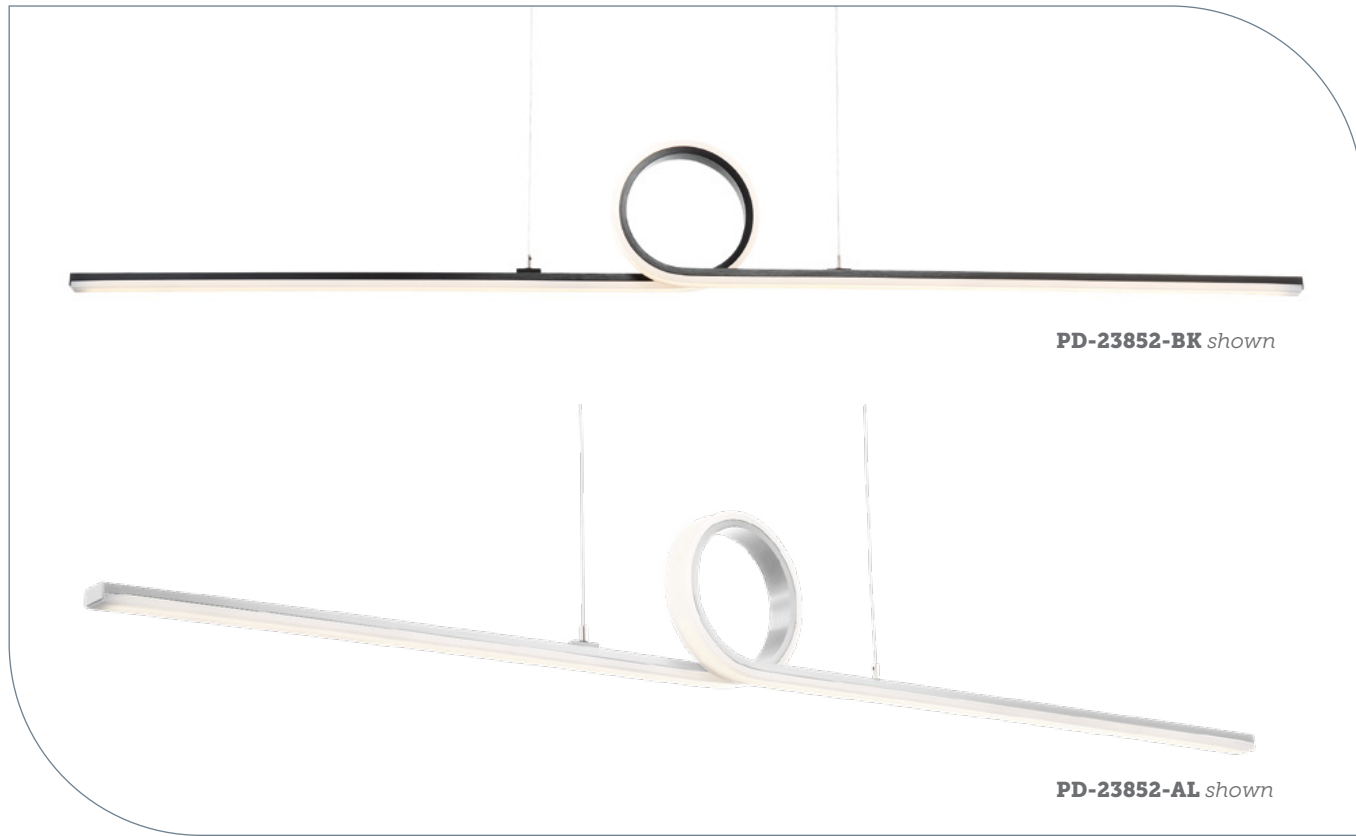

# LOOPHOLE

## 52" LINEAR LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PD-23852:** Size: 52" Watt: 42W  
 LED Lumens: 4,261 Delivered Lumens: 2,733


### Finish

- AL:** Brushed Aluminum
- BK:** Black

Example: **PD-23852-BK**

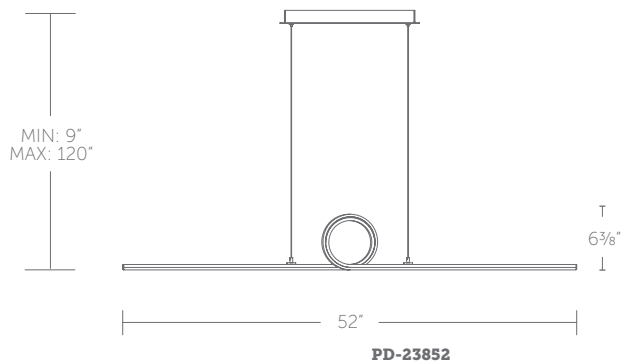

“ Luminous loophole. Clever design details like weighted fasteners that keep the pendant level. ”

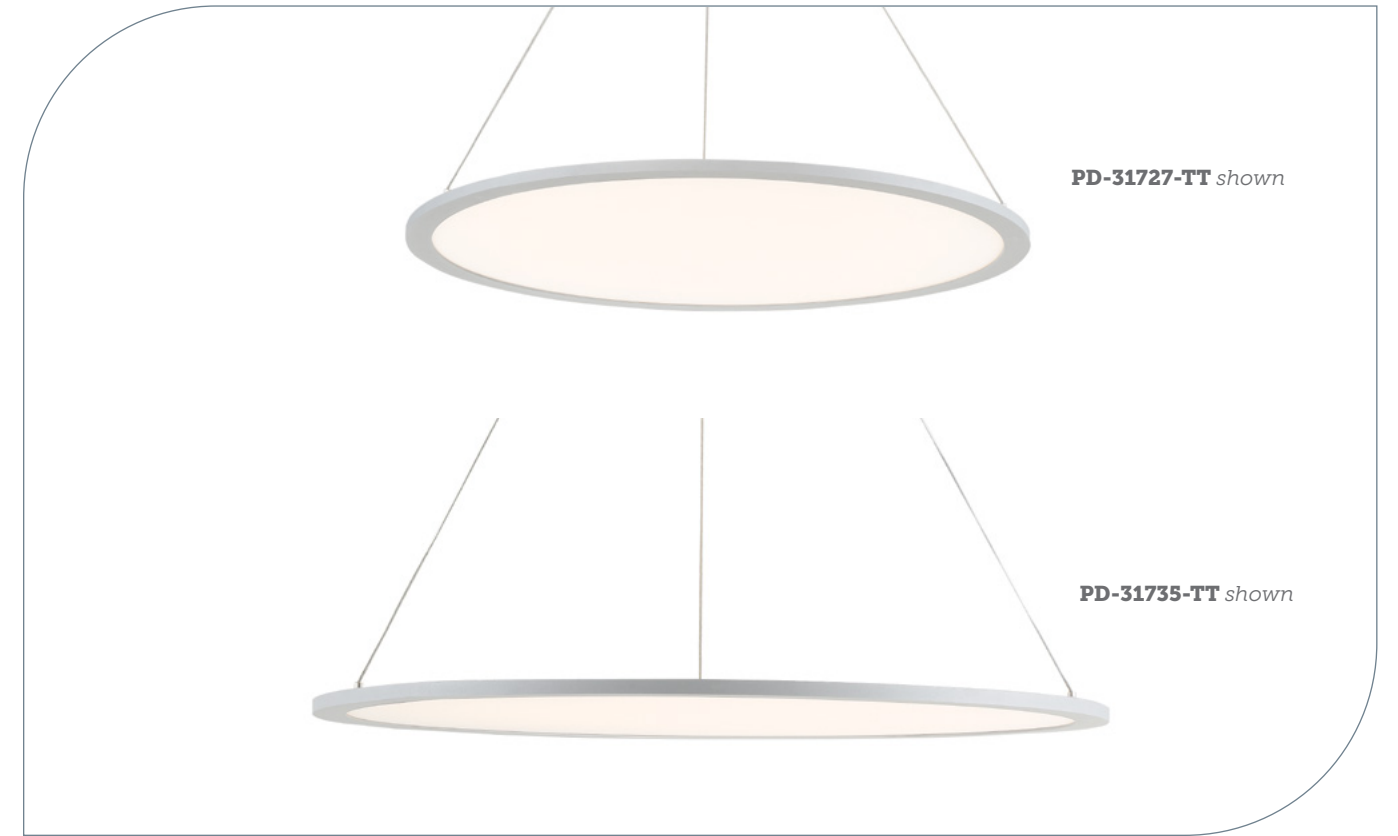

# ILLUSION

## 27" & 35" LED PENDANT

- Up and downlight with edge-lit LED
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals proprietary universal 120V-220V-277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish


- TT:** Titanium
- Example: **PD-31735-TT**

**PD-31727:** Size: 27" Watt: 54W  
 LED Lumens: 5,353 Delivered Lumens: 3,930

**PD-31735:** Size: 35" Watt: 85W  
 LED Lumens: 7,391 Delivered Lumens: 4,366

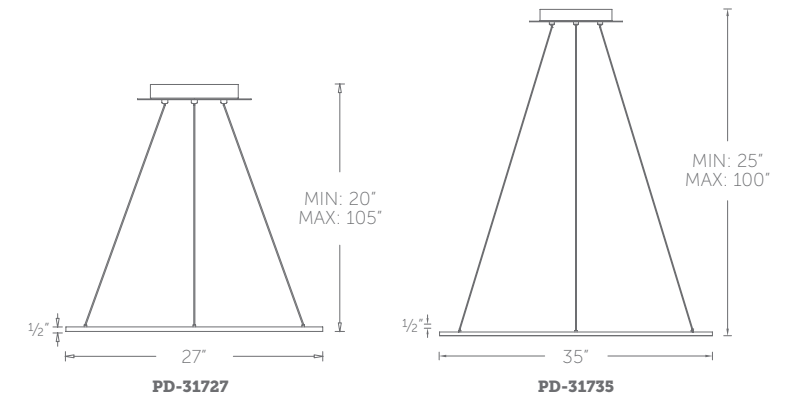

“ Spectacular halo of direct and indirect light from an impossible form. ”

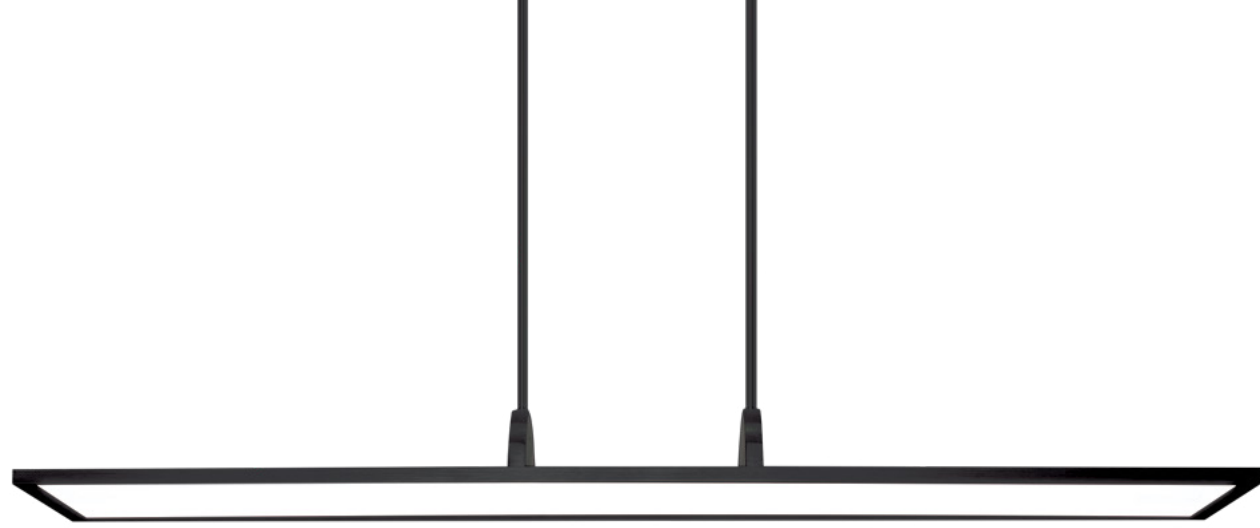

PD-51148-30-BK shown

# LINE

## 48" LINEAR LED PENDANT

- Up and downlight with edge-lit LED
- Six 12" and two 6" downrods included (additional downrod sold separately)
- May be mounted on a sloped ceiling
- Junction box conceals a proprietary 120V transformer



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 80,000 hours  
 Input: 120V (277V special order)


PD-51148-30: Size: 48" Watt: 48W  
 LED Lumens: 4,435 Delivered Lumens: 3,055

### Finish

**AL:**  
Brushed Aluminum

**BK:**  
Black

Example: **PD-51148-30-BK**  
 For 277V, add an "F" before the color temperature: **PD-51148F-30-BK**

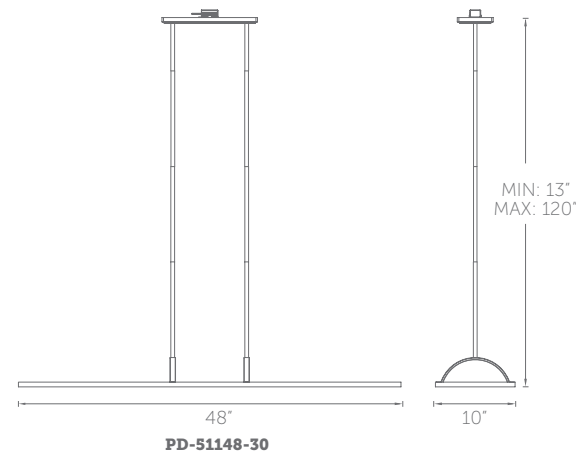

See complementary pieces on page 163.



“ Edge-lit magic.  
 The profile of this direct and indirect  
 pendant is under an inch thick. ”

PD-51148-30-AL shown



PD-45747-BK shown

# E=MC<sup>2</sup>

## 47" LINEAR LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Junction box conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 36,000 hours  
 Input: 120V - 277V


PD-45747: Size: 47" Watt: 30W  
 LED Lumens: 1,770 Delivered Lumens: 1,190

### Finish

**BK:**  
 Black  
 Example: PD-45747-BK



“ Relatively, speaking.  
 An engineering marvel. ”

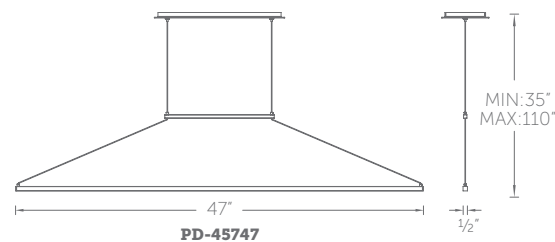

PD-85648-AL shown

# LEVEL

## 48" LINEAR LED PENDANT

- Downlight with edge-lit LED
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Junction box conceals a proprietary 120V transformer

Color Temp: 3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 84,000 hours  
 Input: 120V (277V special order)


PD-85648: Size: 48" Watt: 35W  
 LED Lumens: 1,620 Delivered Lumens: 1,565

### Finish

**AL:**  
 Brushed Aluminum  
 Example: PD-85648-AL  
 For 277V, add an "F"  
 before the finish: PD-85648F-AL



“ Balanced, consistent  
 lighting elevated.  
 Remarkable edge-lit linear  
 blade just 1/2" wide. ”

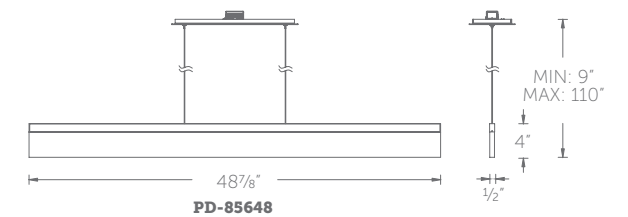

See complementary pieces on page 158.





PD-42909-BK shown

PD-42912-BK shown

PD-42918-BK shown

# NAPA

## 9", 12" & 18" LED PENDANT

- Downlight with extruded acrylic diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a slope ceiling
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

**PD-42909:** Size: 9" Watt: 15W  
 LED Lumens: 1,200 Delivered Lumens: 620

**PD-42912:** Size: 12" Watt: 16W  
 LED Lumens: 1,400 Delivered Lumens: 790

**PD-42918:** Size: 18" Watt: 25W  
 LED Lumens: 2,400 Delivered Lumens: 1,365

### Finish





**BK:**  
Black

Example: **PD-42909-BK**



“Timeless sophistication meets modern technology.”

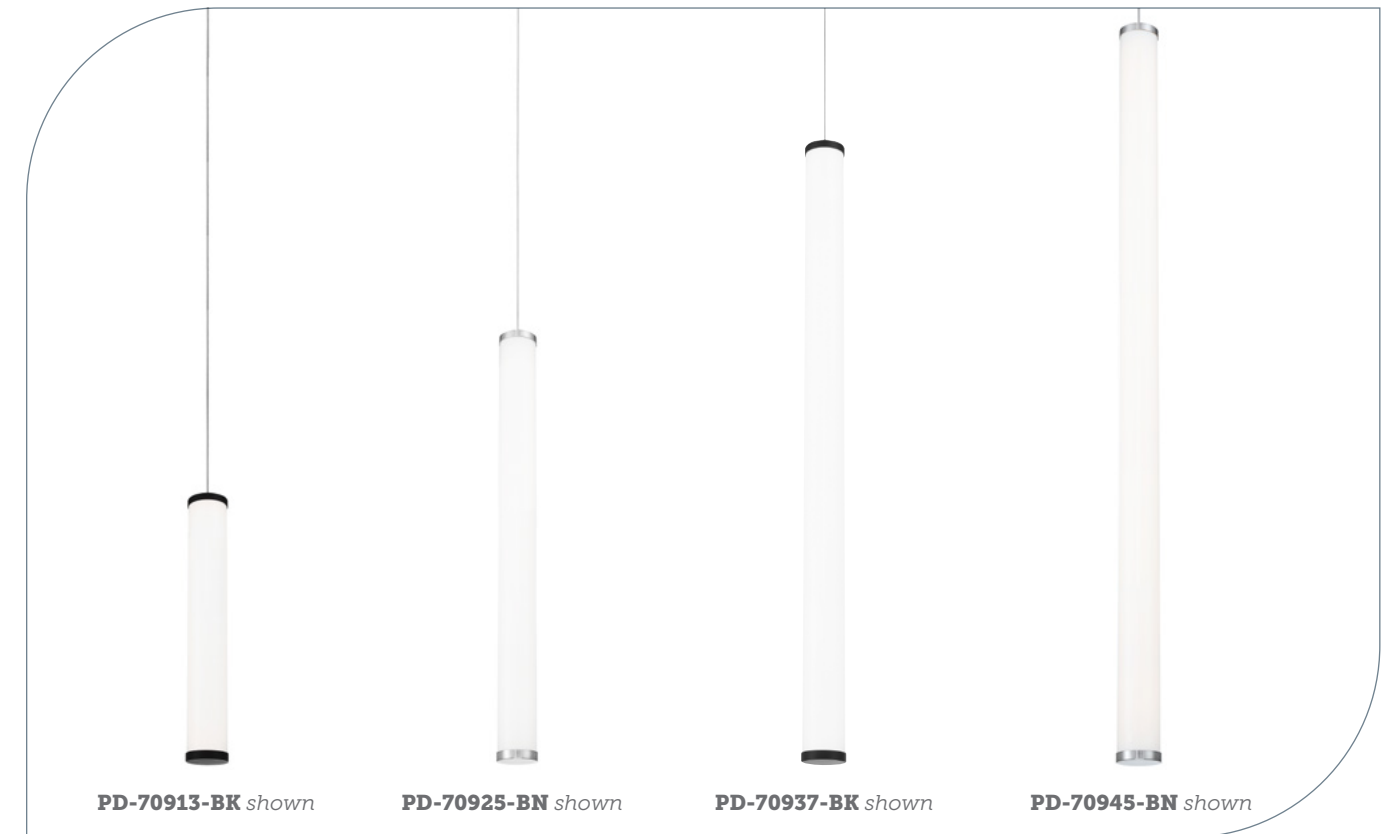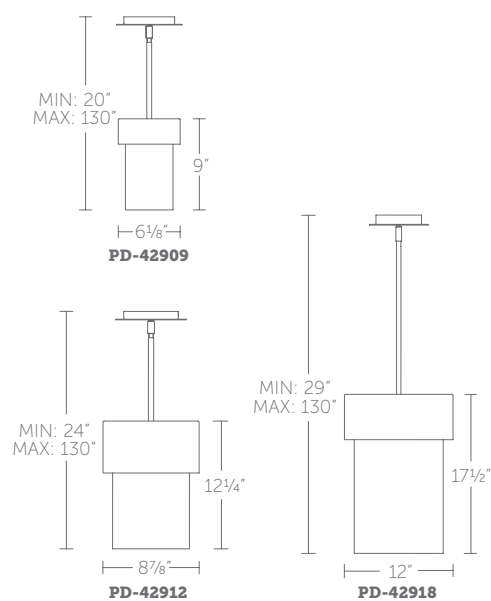

PD-70913-BK shown

PD-70925-BN shown

PD-70937-BK shown

PD-70945-BN shown

# FLARE

## 13", 25", 37" & 45" MINI LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PD-70913:** Size: 13" Watt: 11W  
 LED Lumens: 1,099 Delivered Lumens: 745

**PD-70925:** Size: 25" Watt: 27W  
 LED Lumens: 2,426 Delivered Lumens: 1,700

**PD-70937:** Size: 37" Watt: 37W  
 LED Lumens: 3,801 Delivered Lumens: 2,637

**PD-70945:** Size: 45" Watt: 42W  
 LED Lumens: 4,254 Delivered Lumens: 2,853



“Symmetrical, cylindrical and aerodynamic. Brilliance alone or as a collection.”

### Finish




**BN:**  
Brushed Nickel



**BK:**  
Black

Example: **PD-70913-BK**

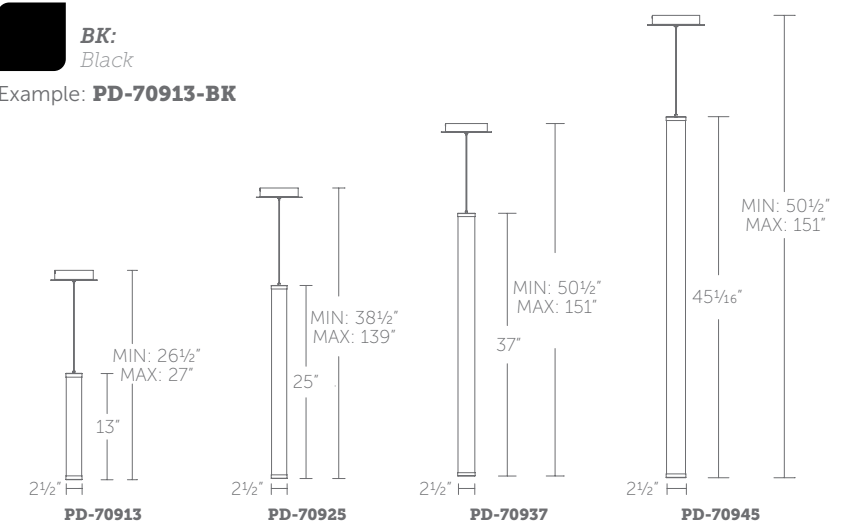



PD-26611-SN shown

PD-26616-SN shown

# ELEMENTUM

## 11" & 16" MINI LED PENDANT

- Opal glass diffuser with twist lock installation
- Downlight illumination
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Junction box conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K (2700K / 3500K special order)  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 65,000 hours  
 Input: 120V-277V


### Finish

**SN:**  
Satin Nickel

Example: **PD-26616-SN**  
 For 2700K add "-27"; 3500K add "-35" before the finish:  
**PD-26616-27-SN**

**PD-26611:** Size: 11" Watt: 15W  
 LED Lumens: 1,187 Delivered Lumens: 858

**PD-26616:** Size: 16" Watt: 20W  
 LED Lumens: 1,769 Delivered Lumens: 1,363

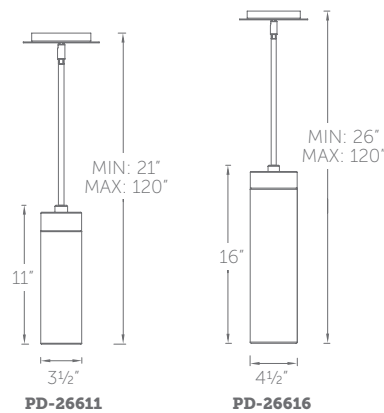

See complementary pieces on page 153.



“ True chemistry between light and style. ”



PD-37806-AL shown

PD-37814-AL shown

# TIC TOC

## 6" & 14" MINI LED PENDANT

- Up and downlight illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V driver

Color Temp: 3000K  
 CRI: 80  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

**PD-37806:** Size: 6" Watt: 15W  
 LED Lumens: 1,198 Delivered Lumens: 684

**PD-37814:** Size: 14" Watt: 28W  
 LED Lumens: 3,150 Delivered Lumens: 1,800



### Finish

**AL:**  
Brushed Aluminum

Example: **PD-37806-AL**



“ An elegant design with up and down illumination. ”

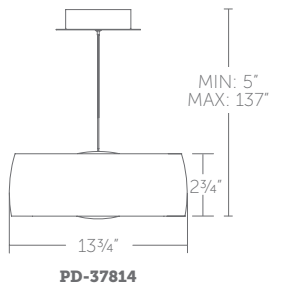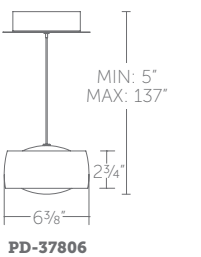



PD-39214-BK shown

“ An alluring, charming etched opal jewel with a touch of aged brass, black or brushed nickel. A standout lighting design element. ”



PD-39214-AB shown



PD-39214-BN shown



TITLE 24  
CALIFORNIA



## 14" MINI LED PENDANT

- Etched opal glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-39214:** Size: 14" Watt: 19W  
 LED Lumens: 1,937 Delivered Lumens: 1,569

### Finish

- AB:**  
Aged Brass
- BN:**  
Brushed Nickel
- BK:**  
Black

Example: **PD-39214-BK**

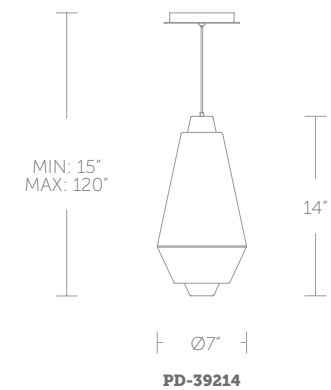

# MARISE



PD-79221-BK shown




## 21" MINI LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

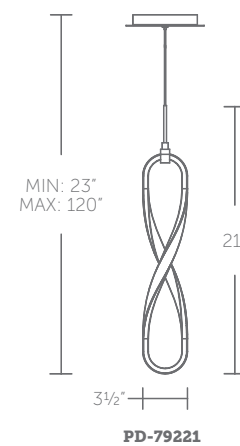

PD-79221: Size: 21" Watt: 11W  
 LED Lumens: 900 Delivered Lumens: 462

### Finish



Example: PD-79221-CH



See complementary pieces on page 168-169.



“ A curvaceous mini pendant adding elegant drama when suspended as a solo act or in groups within your space. ”

PD-79221-CH shown

# CHANDRA



PD-87214-BK shown



## 14" MINI LED PENDANT

- Downlight with clear glass shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V


PD-87214: Size: 14" Watt: 15W  
 LED Lumens: 725 Delivered Lumens: 274

### Finish

**AB:**  
Aged Brass

**BK:**  
Black

Example: PD-87214-AB

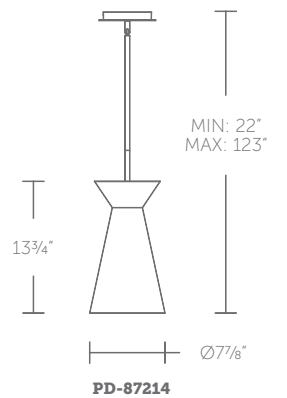

PD-87214



See complementary pieces on page 88-89.

“ This conical pendant features a slim minimalist body with a clear tapered thick wall and an aged brass or black downlight. Create a lovely design statement by grouping in a row over a kitchen island, counter, dining table or bar. ”

PD-87214-AB shown

# CHANDRA



PD-87208-BK shown



TITLE 24  
CALIFORNIA



## 8" MINI LED PENDANT

- Downlight with clear glass shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- ACLED driverless technology

Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 50,000 hours  
Input: 120V

PD-87208: Size: 8" Watt: 15W  
LED Lumens: 958 Delivered Lumens: 382

### Finish




BK:  
Black



BN:  
Brushed Nickel

Example: PD-87208-BN

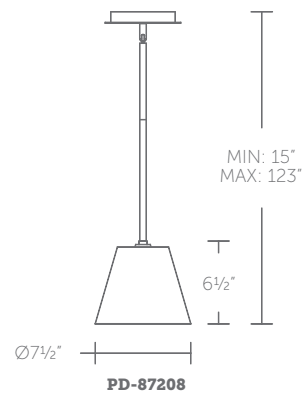

See complementary pieces on page 86-87.



“This lovely pendant features a slim minimalist body with a clear tapered thick wall downlight in brushed nickel or black. Create a design statement by aligning a group of these mini pendants in a row over a kitchen island, counter, dining table or bar.”

PD-87208-BN shown



PD-89210-BK/GO shown

“A vibrant spin on modern style, this mini pendant will top off your lighting dreams with a retro look that integrates an etched acrylic lens in a bold black finish with gold painted interior.”



PD-89210-BN shown



TITLE 24  
CALIFORNIA



## 10" MINI LED PENDANT

- Downlight with etched acrylic diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 50,000 hours  
Input: 120V/277V


**PD-89210:** Size: 10" Watt: 20W  
LED Lumens: 2,500 Delivered Lumens: 1,392

### Finish

**BK/GO:**  
Black/Gold

**BN:**  
Brushed Nickel

Example: **PD-89210-BK/GO**

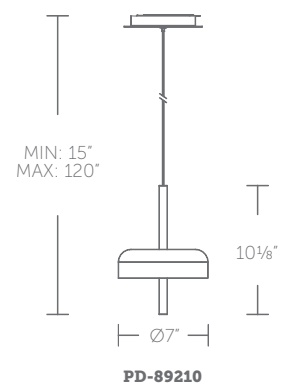

PD-89210

# CHRYSALIS



PD-91207-BN shown



## 7" MINI LED PENDANT

- Downlight with wispy opal glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

PD-91207: Size: 7" Watt: 5W  
 LED Lumens: 312 Delivered Lumens: 216

### Finish




BK:  
Black



BN:  
Brushed Nickel

Example: PD-91207-BN

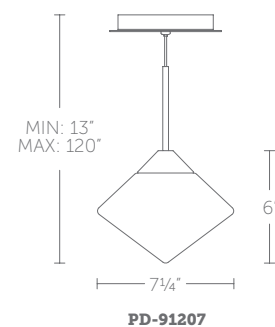

“ Like glittering diamonds in the rough, fine lighting jewels flaunt brilliance at every angle with wispy opal glass enhanced with black or brushed nickel finished hardware. Gems of minimalism. ”

PD-91207-BK shown





PD-41210-BN shown

“Decorative orb integrating a uniquely formed spot for a truly celestial look, like a bubble floating in air.”



PD-41210-BN shown



## 10" MINI LED PENDANT

- Downlight with clear glass shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- ACLED driverless technology


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 73,000 hours  
 Input: 120V

PD-41210: Size: 10" Watt: 11W  
 LED Lumens: 509 Delivered Lumens: 364

### Finish

**BN:**  
 Brushed Nickel

Example: PD-41210-BN

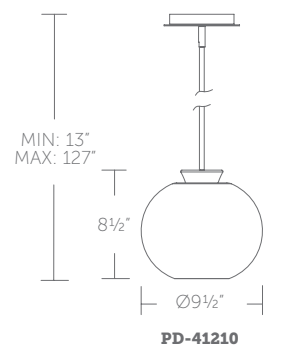



PD-73210-BK/GL shown



## 10" MINI LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on square canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-73210:** Size: 10" Watt: 14W  
 LED Lumens: 1,300 Delivered Lumens: 664

### Finish

**BK/GL:**  
 Black/Gold Leaf  
 Example: **PD-73210-BK/GL**

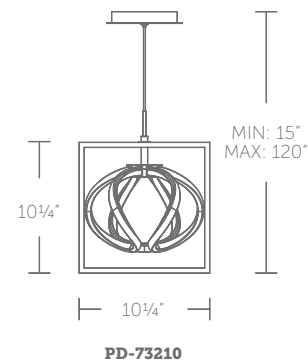

See complementary pieces on page 18-19.



“A curated, timeless treasure showcasing a gold gyroscope ring inside a black box designed to delight and inspire.”

PD-73210-BK/GL shown



PD-75209-CH shown

“ An ethereal element designed to complement modern interiors, this glass mini pendant encases a downlight while floating in air. A mystery waiting to unfold. ”



PD-75209-CH shown



## 9" MINI LED PENDANT

- Clear glass shade with frosted top
- Etched acrylic diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**PD-75209:** Size: 9" Watt: 8W  
 LED Lumens: 800 Delivered Lumens: 387

### Finish



Example: **PD-75209-CH**

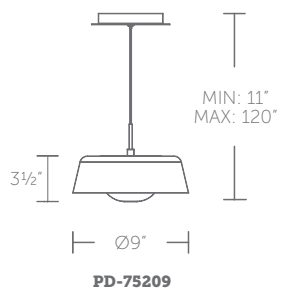

# BOILIA



PD-67209-CH shown



TITLE 24  
CALIFORNIA



## 9" MINI LED PENDANT

- Downlight with etched acrylic diffuser and clear glass shade
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V


PD-67209: Size: 9" Watt: 8W  
 LED Lumens: 950 Delivered Lumens: 564

### Finish



CH:  
Chrome

Example: PD-67209-CH

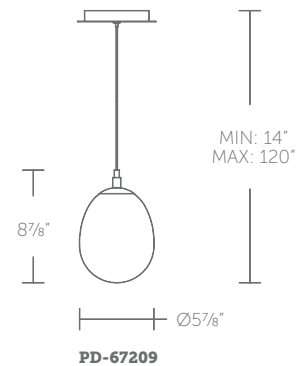

“ Unique oval glass pendant with the drama and charm of uptown chic. ”

PD-67209-CH shown

# INTERLACE



PD-47821-CH shown

“ Delightful swirls and curves interplay radiantly. ”



PD-47821-BK shown



TITLE 24  
CALIFORNIA



## 21" MINI LED PENDANT

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

PD-47821: Size: 21" Watt: 21W  
 LED Lumens: 1,902 Delivered Lumens: 1,087

### Finish


**BK:**  
Black

**CH:**  
Chrome

Example: PD-47821-CH



See complementary pieces on page 57.

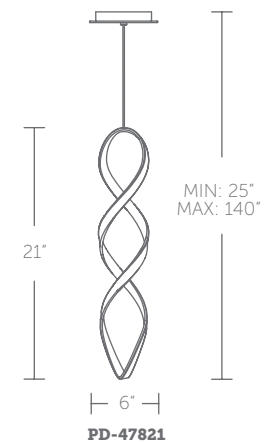

PD-47821



PD-61110-BN shown



## 10" MINI LED PENDANT

- Mouth blown opal glass diffuser
- Rotatable inner metal ring
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V/277V

PD-61110: Size: 10" Watt: 7W  
 LED Lumens: 340 Delivered Lumens: 312

### Finish

- AB:** Aged Brass
- BN:** Brushed Nickel

Example: PD-61110-AB

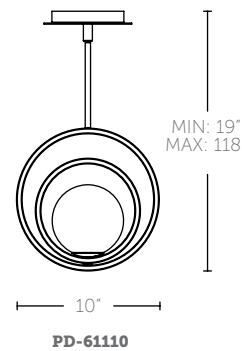

“Resounding midair like a clear musical note.”

PD-61110-AB shown



PD-69108-BN shown

“Simply elegant luminosity.”



PD-69108-BK shown



TITLE 24  
CALIFORNIA

## 8" LED MINI PENDANT

- Downlight with opal glass diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- ACLED driverless technology



Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 54,000 hours  
Input: 120V


**PD-69108:** Size: 8" Watt: 15W  
LED Lumens: 1,400 Delivered Lumens: 899

### Finish

**BK:**  
Black

**BN:**  
Brushed Nickel

Example: **PD-69108-BN**

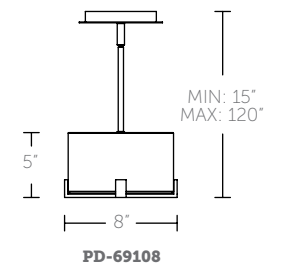



PD-85114-BK shown

PD-85114-BN shown

# ARTEMIS


## 14" MINI LED PENDANT

- Three illuminating arms with frosted silicone diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

PD-85114: Size: 14" Watt: 16W  
 LED Lumens: 1,179 Delivered Lumens: 737

### Finish



Example: PD-85114-BN



“ Bringing eternal grace and lightness. ”



PD-85114



PD-84907-BK shown

PD-84907-CH shown

# VORNADO

## 7" MINI LED PENDANT




“ Seamless curves flow infinitely. ”

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Junction box conceals a proprietary universal 120V-220V-277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V-277V

PD-84907: Size: 7" Watt: 14W  
 LED Lumens: 1,410 Delivered Lumens: 943

### Finish



Example: PD-84907-CH  
 For the Title 24 option, add "T24"  
 before the finish: PD-84907-T24-CH

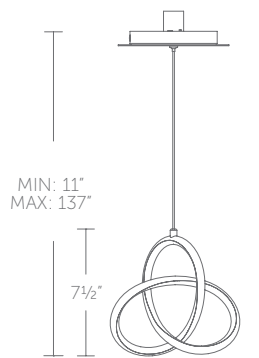

PD-84907



See complementary pieces on page 54-55.



# KONE



PD-72006-SN shown



PD-72006-BK shown



TITLE 24  
CALIFORNIA

## 6" LED MINI PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 50,000 hours  
Input: 120V-277V

PD-72006: Size: 6" Watt: 11W  
LED Lumens: 1,000 Delivered Lumens: 243

### Finish



AB:  
Aged Brass




BK:  
Black



SN:  
Satin Nickel

Example: PD-72006-AB  
For title 24 option add "T24"  
before the finish: PD-72006-T24-AB

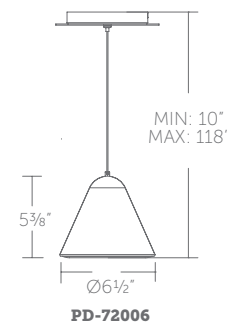

“ Minimal and inventive.  
A simple, conical design. ”

PD-72006-AB shown



PD-13006-BK shown

# OHM

## 6" MINI LED PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look with matching color
- May be mounted on a sloped ceiling
- Thin canopy conceals a 120V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

PD-13006: Size: 6" Watt: 13W  
 LED Lumens: 1,200 Delivered Lumens: 553

### Finish




BK:  
Black

Example: PD-13006-BK



“ Modern elegance paired with advanced luminosity. ”

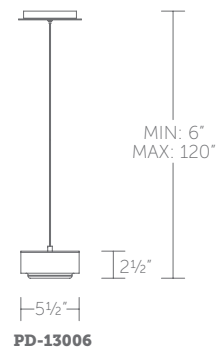

PD-13006



PD-76908-AB shown

PD-76908-BK shown

PD-76908-CH shown

# ACTION

## 8" MINI LED PENDANT

- Downlight with die-cast etched acrylic diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Junction box conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V-277V

PD-76908: Size: 8" Watt: 7W  
 LED Lumens: 674 Delivered Lumens: 573

### Finish



AB:  
Aged Brass



BK:  
Black




CH:  
Chrome

Example: PD-76908-AB

For title 24 option add "T24" before the finish: PD-76908-T24-AB



“ Drops of liquid metal, alone or in multiples for a futuristic look. ”

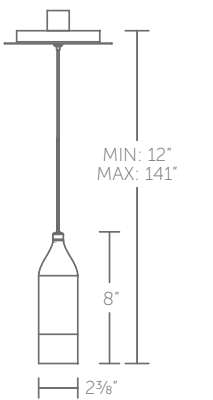

PD-76908



PD-68909-BN shown

“ An etched opal glass cylinder wrapped in a sophisticated design. ”



PD-68909-AB shown



PD-68909-BK shown



TITLE 24  
CALIFORNIA

## 9" LED MINI PENDANT

- Up and down light with spin on opal glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Junction box conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV  
Rated Life: 60,000 hours  
Input: 120V-277V

**PD-68909:** Size: 9" Watt: 20W  
LED Lumens: 1,718 Delivered Lumens: 884


### Finish

**AB:**  
Aged Brass

**BK:**  
Black

**BN:**  
Brushed Nickel

Example: **PD-68909-BN**  
For title 24 option add "T24"  
before the finish: **PD-68909-T24-BN**

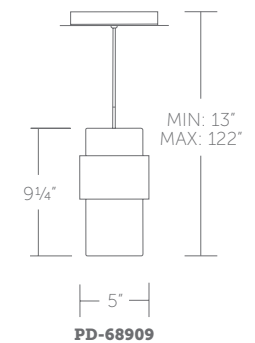



PD-98908-AB shown

# CRATER

## 8" MINI LED PENDANT



“Luxury in layers. A modern take on classic sophistication.”

- Downlight with clear glass and bubbled acrylic diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Junction box conceals a proprietary universal 120V-220V-277V driver


Color Temp: 3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V-277V

PD-98908: Size: 8" Watt: 6W  
 LED Lumens: 338 Delivered Lumens: 315

### Finish



Example: PD-98908-AB  
 For the 24 option, add "T24" before the finish: PD-98908-T24-AB

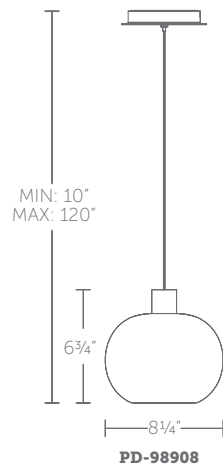

PD-52008-CH shown

# LOLLI

## 8" MINI LED PENDANT




“Unique oval bronze glass pendant with a hammered optic.”

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Junction box conceals a proprietary universal 120V-220V-277V driver


Color Temp: 2700K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 80,000 hours  
 Input: 120V-277V

PD-52008: Size: 8" Watt: 7W  
 LED Lumens: 284 Delivered Lumens: 165

### Finish



Example: PD-52008-CH

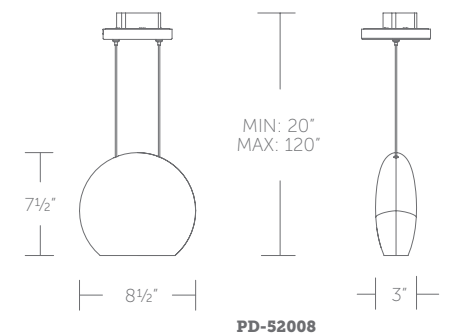



# LED Sconces + Bath

Creative progressive designs conjure an inspired blend of modern materials, artful pieces and advanced artisanship that have utilized the most advanced LED technologies while accentuating the upscale hardware and finishes. Fine baths and powder rooms are enhanced with show-stopping lighting from dweLED that complements your architecture and design for those that crave bold new looks while demanding the best in functionality and flattering illumination.

# FALLON



WS-53223-BN shown



WS-53223-BK shown



## 23" LED SCONCE + BATH

- Frontlight with etched acrylic diffuser
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-53223:** Size: 23" Watt: 15W  
 LED Lumens: Up to 1,308  
 Delivered Lumens: Up to 1,054

### Finish




**BK:**  
Black



**BN:**  
Brushed Nickel

Example: **WS-53223-BN**

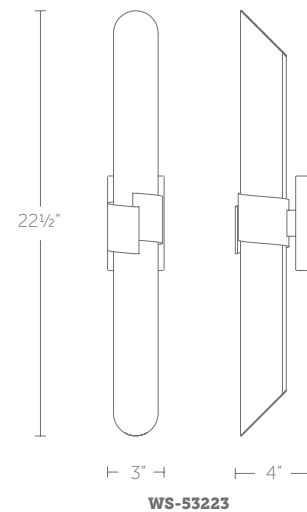

“Sleek etched extruded acrylic offering flattering illumination around a mirror in fine powder rooms.”

WS-53223-BN shown



WS-95227-BK shown

“ An intriguing bath luminaire that glimmers with a complimentary sublime glow. ”



WS-95227-BK shown



## 27" LED SCONCE + BATH


- Cutting-edge illumination with etched acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish

**BK:**  
 Black  
 Example: **WS-95227-BK**

**WS-95227:** Size: 27" Watt: 28W  
 LED Lumens: 2,120 Delivered Lumens: 1,898

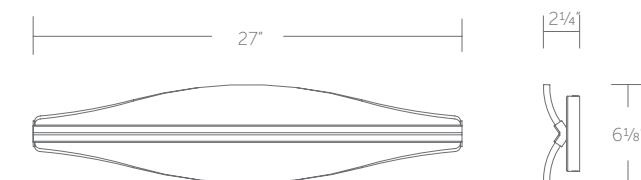

WS-95227

# MARQUES



WS-83120-BK shown



WS-83129-TT shown



WS-83139-BK shown



TITLE 24  
CALIFORNIA

## 20", 29" & 39" LED SCONCE + BATH

- Omnidirectional illumination
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations



Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV,  
100% - 10% TRIAC  
Rated Life: 50,000 hours  
Input: 120V/277V

### Finish



**BK:**  
Black




**TT:**  
Titanium

Example: **WS-83129-BK**


**WS-83120:** Size: 20" Watt: 15W  
LED Lumens: Up to 1,297  
Delivered Lumens: Up to 691

**WS-83129:** Size: 29" Watt: 29W  
LED Lumens: Up to 2,389  
Delivered Lumens: Up to 1,271


**WS-83139:** Size: 39" Watt: 32W  
LED Lumens: Up to 2,714  
Delivered Lumens: Up to 1,444

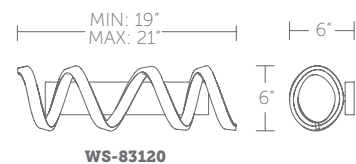

WS-83120

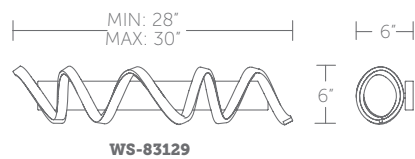

WS-83129

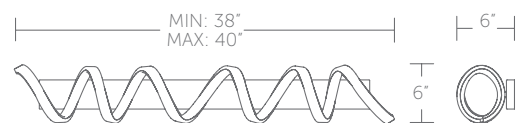

WS-83139



See complementary pieces  
on page 236-237.



“ Graceful and noble.  
Impossible to ignore. ”


WS-83129-BK shown





“ One moment there, gone the next.  
Sublime luminous spirit. ”

WS-93120-BK shown

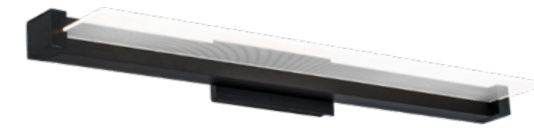

WS-93120-BK shown



WS-93127-BN shown



## 20" & 27" LED SCONCE + BATH

- Cutting-edge light guide panel is transparent in the off state and luminous when turned on
- May be mounted with or without canopy (1" slim junction box JB-0501 sold separately)
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on ceiling or wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 60,000 hours  
 Input: 120V

### Finish


**BK:**  
Anodized Black

**BN:**  
Brushed Nickel

Example: **WS-93120-BK**

**WS-93120:** Size: 20" Watt: 17W  
 LED Lumens: 1,731  
 Delivered Lumens: 739

**WS-93127:** Size: 27" Watt: 23W  
 LED Lumens: 2,295  
 Delivered Lumens: 1,055

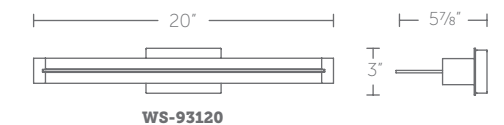

WS-93120



WS-93127

# PARALLAX



WS-73118-BK shown



WS-73124-CH shown



## 18" & 24" LED SCONCE + BATH

- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish



**BK:**  
Black



**BN:**  
Brushed Nickel




**CH:**  
Chrome

Example: **WS-73124-BN**

**WS-73118:** Size: 18" Watt: 6W  
 LED Lumens: 271  
 Delivered Lumens: 173

**WS-73124:** Size: 24" Watt: 6W  
 LED Lumens: 393  
 Delivered Lumens: 275

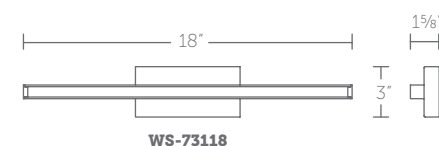

WS-73118



WS-73124



See complementary pieces on page 252-253.



“ Straight forward and honest. Unparalleled. ”

WS-73124-BN shown



“ A high-functioning selection. Unparalleled. ”

WS-73123-30-BK shown



## 18" & 24" LED SCONCE + BATH

- Downlight illumination
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish

**BK:**  
Black

**BN:**  
Brushed Nickel

**CH:**  
Chrome

Example: **WS-73123-30-BK**

### WS-73117-27, WS-73117-30, WS-73117-35:


Size: 18" Watt: 6W  
 LED Lumens: Up to 263  
 Delivered Lumens: Up to 169

### WS-73123-27, WS-73123-30, WS-73123-35:

Size: 24" Watt: 11W  
 LED Lumens: Up to 542  
 Delivered Lumens: Up to 340




See complementary pieces on page 24-25.



WS-73117



WS-73123

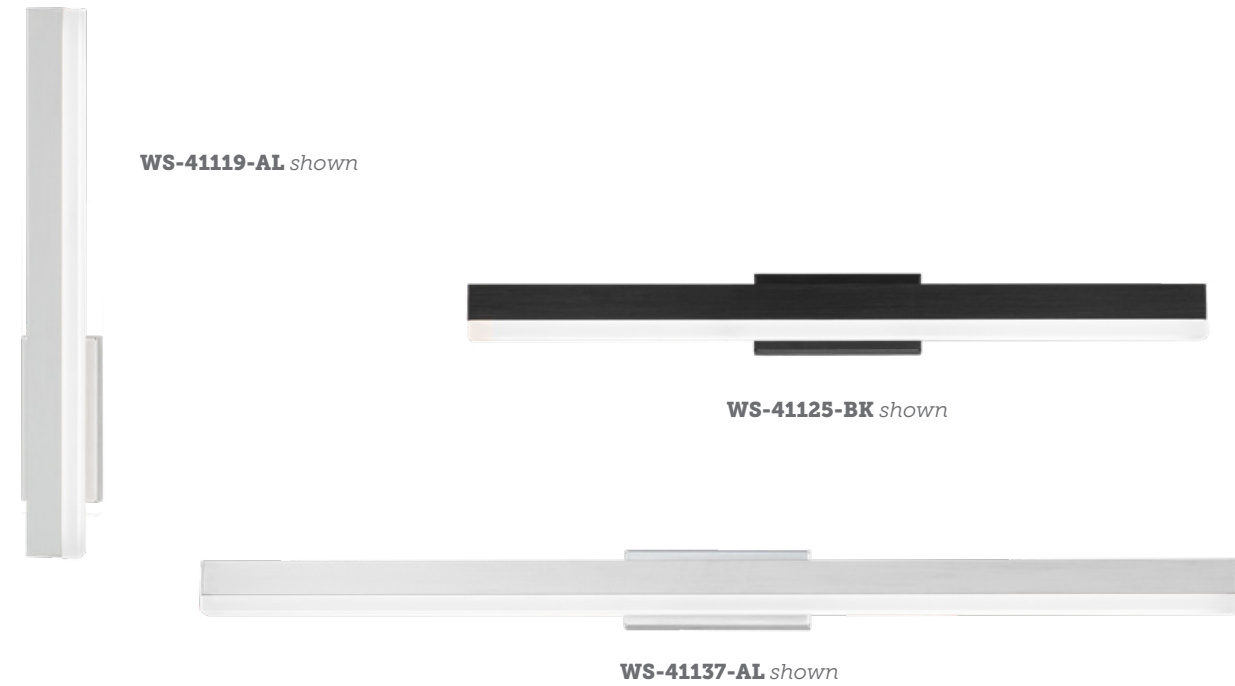

# STYX

## 19", 25" & 37" LED SCONCE + BATH



- Directional light with an etched diffuser
- Adjustable backplate
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations




Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**Finish**

**AL:**  
Brushed Aluminum

**BK:**  
Anodized Black

Example: **WS-41119-BK**

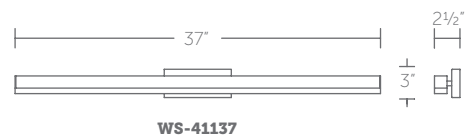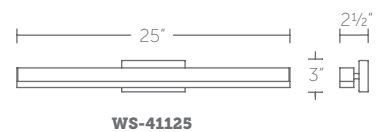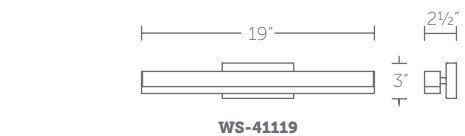

**WS-41119:** Size: 19" Watt: 16W  
 LED Lumens: 1,247  
 Delivered Lumens: 688

**WS-41125:** Size: 25" Watt: 19W  
 LED Lumens: 1,421  
 Delivered Lumens: 824

**WS-41137:** Size: 37" Watt: 28W  
 LED Lumens: 2,247  
 Delivered Lumens: 1,301



“ Quietly sleek. An underlying way of light. ”

WS-41119-BK shown

# JASMINE



“ Irresistibly attractive.  
 Wrapped around her little finger. ”

WS-77127-BK shown



WS-77127-CH shown



WS-77137-BK shown




## 27" & 37" LED SCONCE + BATH

- Frosted silicone diffuser with omnidirectional illumination
- Oval backplate
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V


### Finish




Example: **WS-77127-BK**

**WS-77127:** Size: 27" Watt: 8W  
 LED Lumens: 786 Delivered Lumens: 504

**WS-77137:** Size: 37" Watt: 12W  
 LED Lumens: 1,155 Delivered Lumens: 740

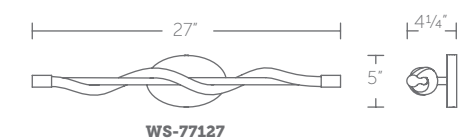

WS-77127

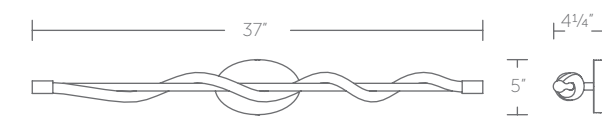

WS-77137

# MUSEO



WS-65118-WT shown



WS-65128-WT shown



## 18" & 28" LED SCONCE + BATH

- Faux alabaster. Like real stone, each piece is unique.
- Up and downlight with etched acrylic diffuser
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V/277V

### Finish



WT:  
White

Example: **WS-65118-WT**

**WS-65118:** Size: 18" Watt: 17W  
 LED Lumens: 1,769 Delivered Lumens: 1,140

**WS-65128:** Size: 28" Watt: 33W  
 LED Lumens: 3,079 Delivered Lumens: 1,929



WS-65118



WS-65128



“Elegantly restrained and substantively delightful.”

WS-65118-WT shown



WS-89128-30-AL shown

“Change your perspective from different vantage points.”



WS-89120-30-AL shown



WS-89128-30-BK shown



## 20" & 28" LED SCONCE + BATH

- Back lit etched acrylic diffuser
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish

- AL:** Brushed Aluminum
- BK:** Black


Example: **WS-89128-30-AL**

### WS-89120-27, WS-89120-30, WS-89120-35:

Size: 20" Watt: 10W  
 LED Lumens: Up to 805 Delivered Lumens: Up to 644

### WS-89128-27, WS-89128-30, WS-89128-35:

Size: 28" Watt: 17W  
 LED Lumens: Up to 1,412 Delivered Lumens: Up to 1,300

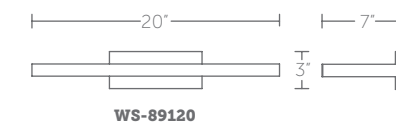

WS-89120



WS-89128



# WAVE

## 17" & 28" LED SCONCE + BATH

- Edge lit light guide diffuser
- Backlight with recessed silicone diffuser
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

**WS-87117:** Size: 17" Watt: 15W  
 LED Lumens: 544 Delivered Lumens: 418

**WS-87128:** Size: 28" Watt: 30W  
 LED Lumens: 1,060 Delivered Lumens: 815

### Finish





**CH:**  
 Chrome

Example: **WS-87117-CH**



“Glistens like the sun  
 on the ocean currents.”

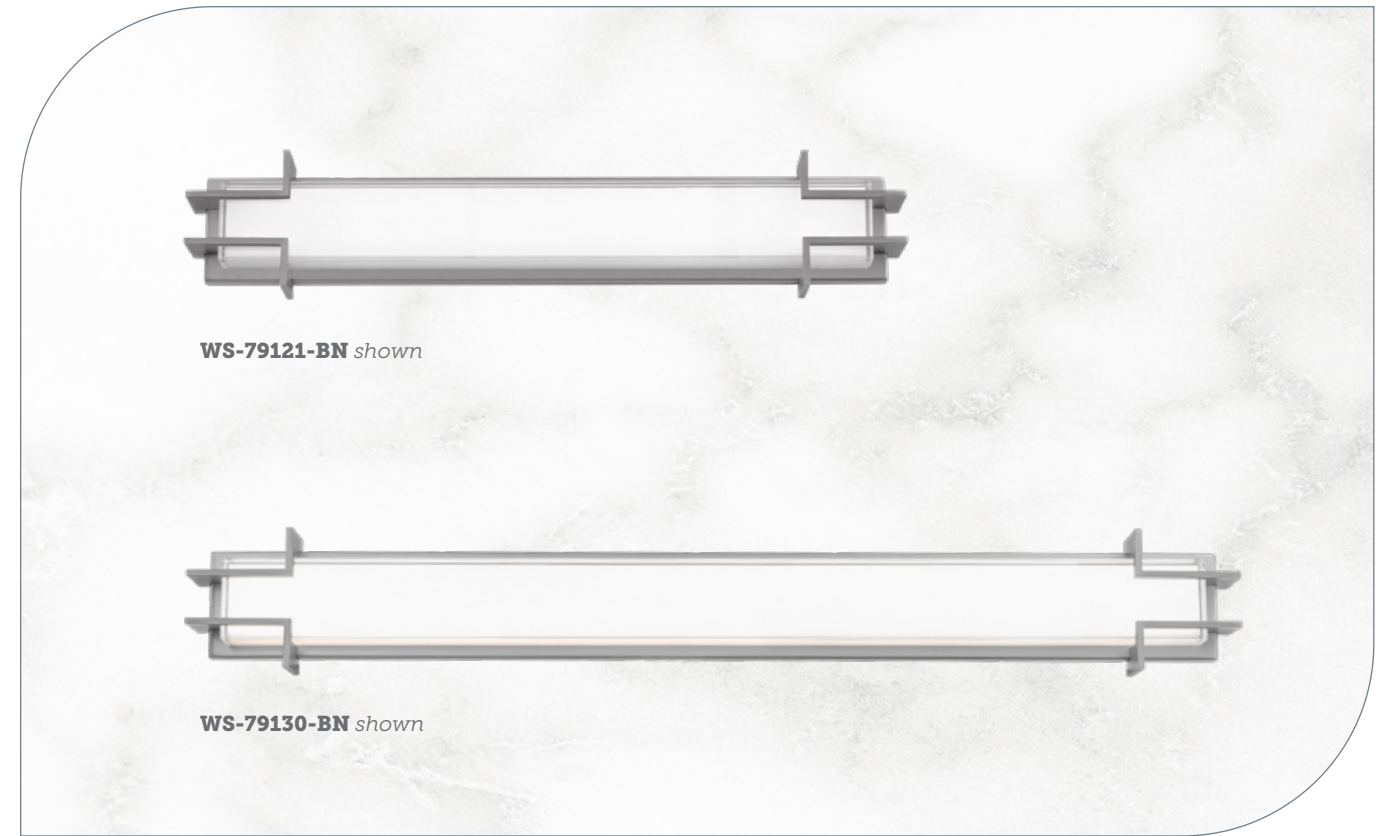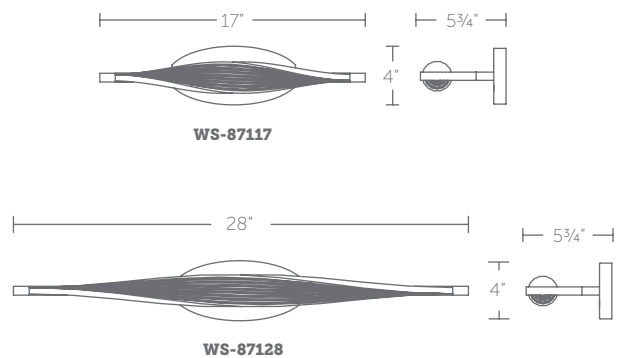

# SIMONE

## 21" & 30" LED SCONCE + BATH

- Ceramic silk-screen mitered glass diffuser
- Conversion plate included to accommodate 4" junction box
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-79121:** Size: 21" Watt: 22W  
 LED Lumens: 1,800 Delivered Lumens: 1,100

**WS-79130:** Size: 30" Watt: 34W  
 LED Lumens: 2,500 Delivered Lumens: 2,100

### Finish




**BN:**  
 Brushed Nickel

Example: **WS-79121-BN**



“Artfully framed illumination.  
 Precisely cut and enveloped.”

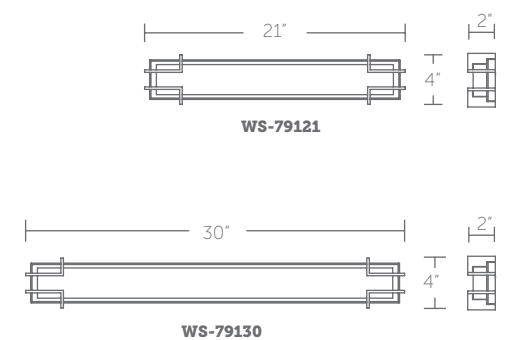



# LOCKE



WS-30018-BN shown



WS-30018-AB shown



## 18" LED SCONCE + BATH

- Unique, faceted diamond backplate
- Up and downlight with opal glass diffuser
- May be mounted on wall in all orientations
- ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V


### Finish

**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

Example: **WS-30018-BN**

**WS-30018:** Size: 18" Watt: 21W  
 LED Lumens: 1,580 Delivered Lumens: 1,270

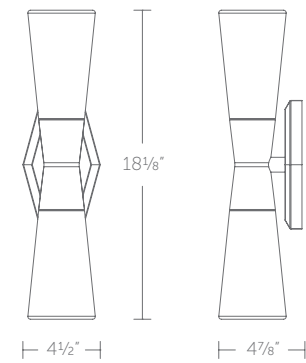


WS-30018



“ Timeless yet contemporary. Frosted opal glass shades embraced by elegantly tailored hardware. ”

WS-30018-BN shown

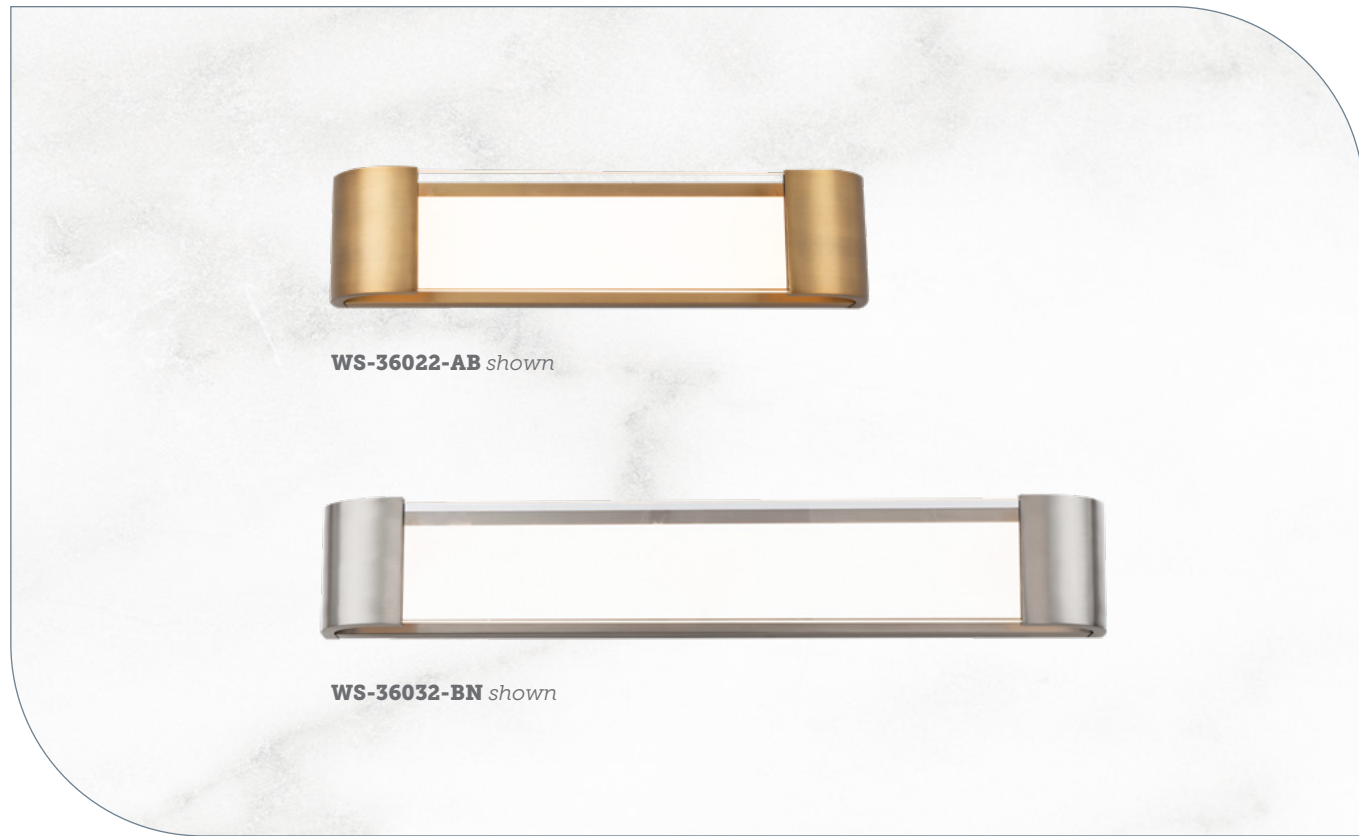

WS-36022-AB shown

WS-36032-BN shown

# MELROSE

## 22" & 32" LED SCONCE + BATH

- Frontlight with clear and ceramic silk-screen glass diffuser
- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**WS-36022:** Size: 22" Watt: 26W  
 LED Lumens: 1,720 Delivered Lumens: 1,175  
**WS-36032:** Size: 32" Watt: 32W  
 LED Lumens: 2,105 Delivered Lumens: 1,505

### Finish


**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

Example: **WS-36032-BN**



“Modern and clean. Clear and opal glass layers encapsulate perfectly even LED illumination.”

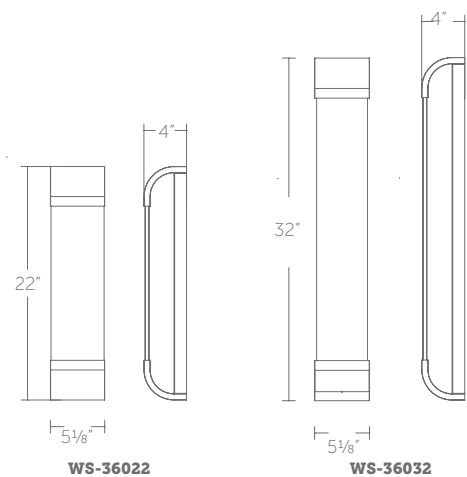

WS-37024-BN shown

WS-37034-AB shown

# MERCER

## 24" & 34" LED SCONCE + BATH

- Frontlight with opal glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-37024:** Size: 24" Watt: 32W  
 LED Lumens: 2,636 Delivered Lumens: 1,359  
**WS-37034:** Size: 34" Watt: 48W  
 LED Lumens: 4,008 Delivered Lumens: 2,481

### Finish


**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

Example: **WS-37024-AB**



“Classic design elegantly finished. Opal glass shade provides diffused illumination.”

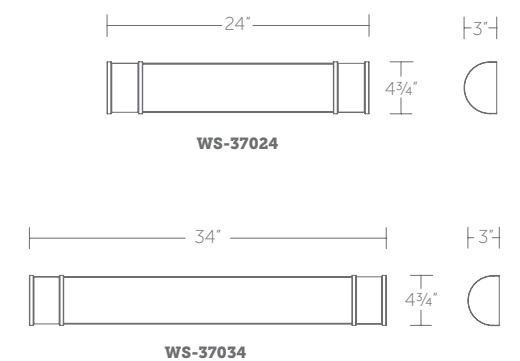




“Elegant diffuse illumination. Pairs well with round, oval, or rectangular mirrors.”

WS-35020-BN shown



WS-35020-CH shown

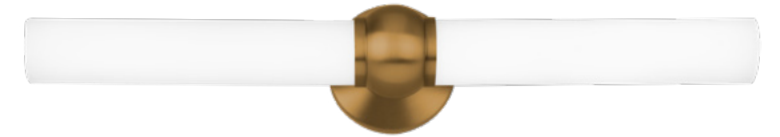

WS-35027-AB shown



## 20" & 27" LED SCONCE + BATH

- Frontlight with opal glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

**WS-35020:** Size: 20" Watt: 27W  
 LED Lumens: 2,059 Delivered Lumens: 1,439  
**WS-35027:** Size: 27" Watt: 34W  
 LED Lumens: 2,778 Delivered Lumens: 1,983



### Finish

**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

**CH:**  
Chrome

Example: **WS-35027-BN**

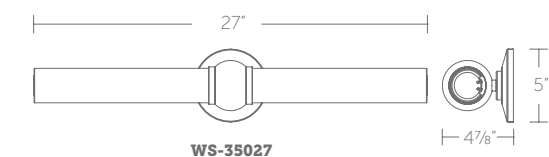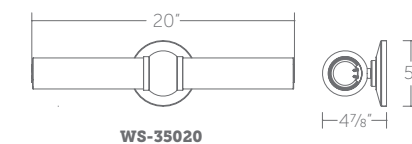



# DARCY

## 24" & 36" LED SCONCE + BATH

- Frontlight with ceramic silk-screen mitered glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

**WS-38024:** Size: 24" Watt: 34W  
 LED Lumens: 3,800 Delivered Lumens: 1,733  
**WS-38036:** Size: 36" Watt: 45W  
 LED Lumens: 5,000 Delivered Lumens: 2,383

### Finish


**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

Example: **WS-38024-BN**



“Flattering illumination. Experience unparallel task lighting above a vanity or alongside a mirror.”

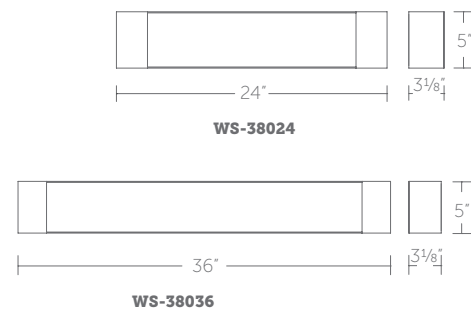

# ESPRIT

## 15", 26" & 38" LED SCONCE + BATH

- Frontlight with etched acrylic diffuser
- Junction box conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**WS-69815:** Size: 15" Watt: 11W  
 LED Lumens: 845 Delivered Lumens: 636

**WS-69826:** Size: 26" Watt: 20W  
 LED Lumens: 1,784 Delivered Lumens: 1,240

**WS-69838:** Size: 38" Watt: 30W  
 LED Lumens: 2,712 Delivered Lumens: 2,136




“High-performance LED modules. Slim, geometric profile.”

### Finish


**BN:**  
Brushed Nickel

**CH:**  
Chrome


Example: **WS-69826-BN**

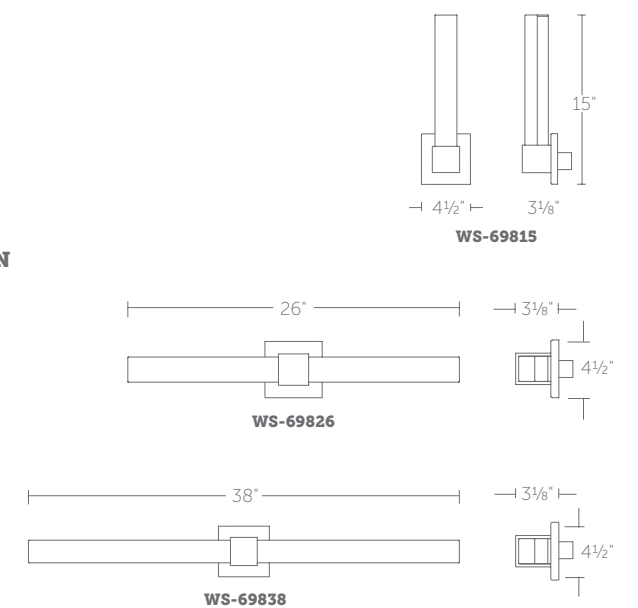

# REPOSE

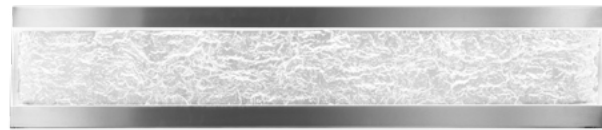

**WS-34027-AL** shown

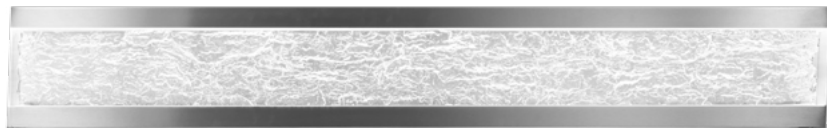

**WS-34037-AL** shown



## 27" & 37" LED SCONCE + BATH

- Up and downlight edge-lit LED with moulded diffuser deeply textured on the inside
- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations



Color Temp: 3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish



**AL:**  
Brushed Aluminum


Example: **WS-34027-AL**

**WS-34027:** Size: 27" Watt: 26W  
 LED Lumens: 1,493 Delivered Lumens: 1,356

**WS-34037:** Size: 37" Watt: 32W  
 LED Lumens: 2,122 Delivered Lumens: 1,785



**WS-34027**

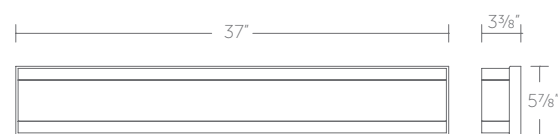


**WS-34037**



“Elaborate and embossed. Powerful illumination with enchanting sparkle and charm.”

**WS-34027-AL** shown

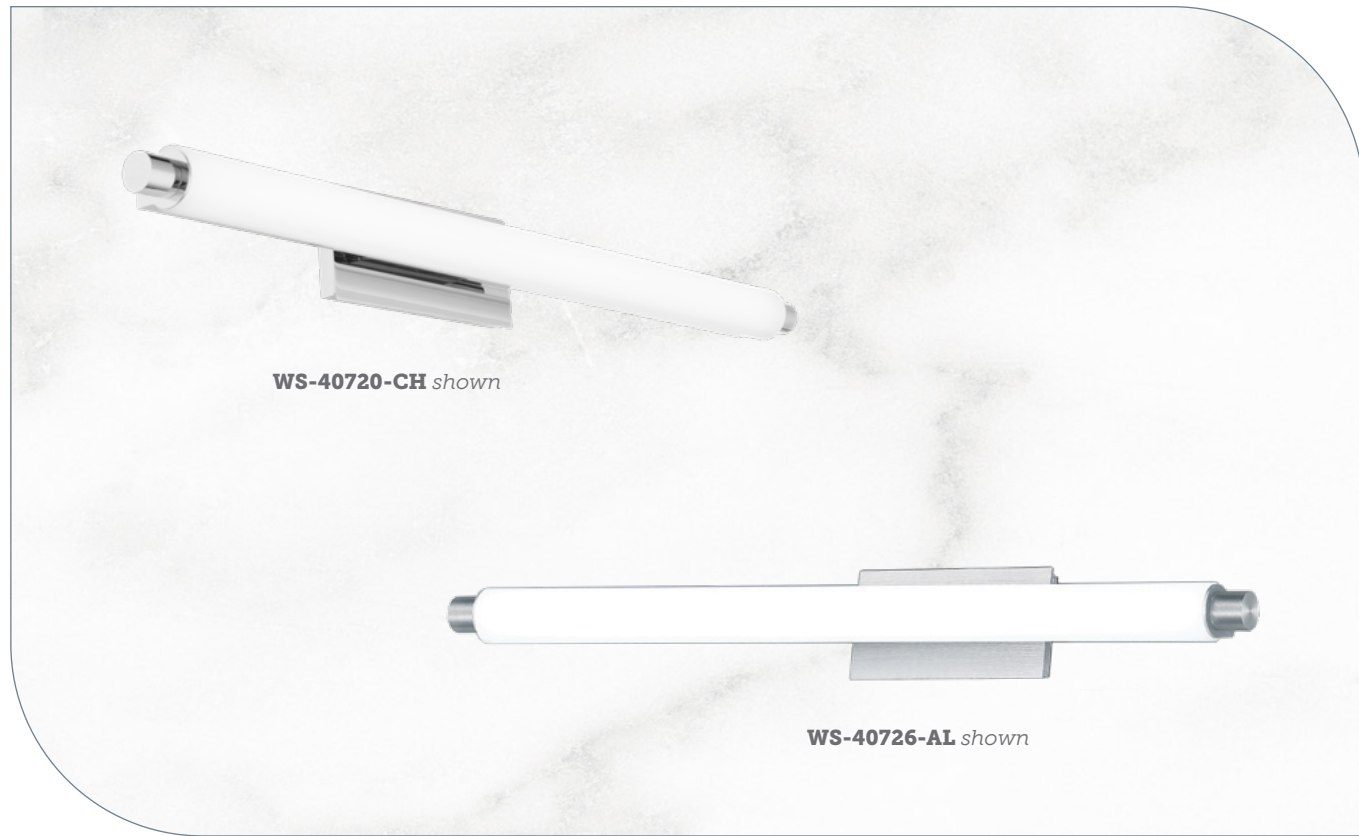

# VISTA

## 20" & 26" LED SCONCE + BATH

- Frontlight with etched acrylic diffuser
- Adjustable backplate
- Conversion plate included to accommodate 4" junction box
- Junction box conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V-277V


### Finish

- AL:** Brushed Aluminum
- CH:** Chrome

Example: **WS-40720-CH**

**WS-40720:** Size: 20" Watt: 15W  
 LED Lumens: 1,387 Delivered Lumens: 1,216

**WS-40726:** Size: 26" Watt: 20W  
 LED Lumens: 1,713 Delivered Lumens: 1,578

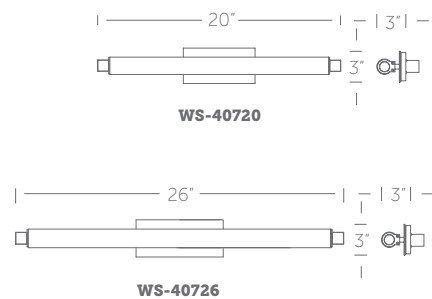

“ A brilliant outlook.  
 Versatile 1 inch  
 luminaire with narrow  
 spears of light. ”



# ELEMENTUM

## 13", 22" & 30" LED SCONCE + BATH

- Frontlight with opal glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- ACLED driverless technology
- 22" and 30" versions may be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100%-10% ELV  
 Rated Life: 80,000 hours  
 Input: 120V (277V special order)

### Finish


- BN:** Brushed Nickel
- CH:** Chrome

Example: **WS-7222-BN**  
 For 277V special order, add an "F" before the finish: **WS-7222F-BN**


**WS-7213:** Size: 13" Watt: 13W  
 LED Lumens: Up to 1,050  
 Delivered Lumens: Up to 750

**WS-7222:** Size: 22" Watt: 26W  
 LED Lumens: Up to 2,200  
 Delivered Lumens: Up to 1,650

**WS-7230:** Size: 30" Watt: 31W  
 LED Lumens: Up to 2,700  
 Delivered Lumens: Up to 2,250



“ Tubular, streamlined design  
 for adaptable vertical and  
 horizontal oriented lighting.  
 A sleek enhancement  
 to any décor. ”

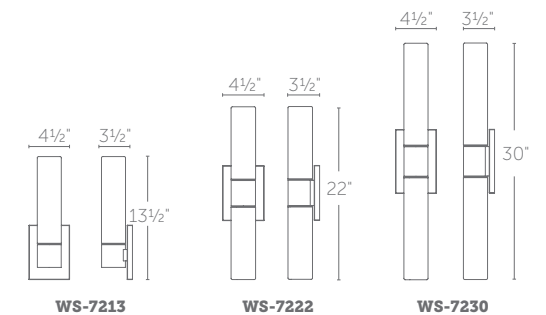



WS-77636-30-AL shown

“A beautiful bar of pure LED light radiates through the co-extruded acrylic diffuser for brighter illumination, and an adjustable back plate adds versatility to this design’s many attributes. It’s a clean modern sconce anywhere you mount it.”



WS-77612-30-AL shown



WS-77618-30-AL shown



WS-77624-30-BK shown

# BRINK

## 12", 18", 24" & 36" LED SCONCE + BATH



- Frontlight with etched acrylic diffuser
- Adjustable backplate
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Junction box conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 85,000 hours  
 Input: 120V-277V

### Finish

- AL:** Brushed Aluminum
- BK:** Brushed Black

Example: **WS-77636-30-BK**

#### WS-77612-27, WS-77612-30, WS-77612-35:

Size: 12" Watt: 11W  
 LED Lumens: Up to 935 Delivered Lumens: up to 840

#### WS-77618-27, WS-77618-30, WS-77618-35:


Size: 18" Watt: 16W  
 LED Lumens: Up to 1,330 Delivered Lumens: up to 1,115

#### WS-77624-27, WS-77624-30, WS-77624-35:


Size: 24" Watt: 21W  
 LED Lumens: Up to 1,785 Delivered Lumens: up to 1,510

#### WS-77636-27, WS-77636-30, WS-77636-35:


Size: 36" Watt: 30W  
 LED Lumens: Up to 2,561 Delivered Lumens: up to 2,180




WS-77612



WS-77618



WS-77624



WS-77636



WS-79622-PN shown



WS-79628-PN shown



## 22", 28" & 36" LED SCONCE + BATH

- Frontlight with ceramic silk-screen mitered glass diffuser
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V (277V special order)


### Finish

**PN:** Polished Nickel  
 Example: **WS-79628-PN**  
 For 277V special order, add an "F" before the finish:  
**WS-79622F-PN**

**WS-79622:** Size: 22" Watt: 31W  
 LED Lumens: Up to 2,800 Delivered Lumens: Up to 1,950

**WS-79628:** Size: 28" Watt: 40W  
 LED Lumens: Up to 3,700 Delivered Lumens: Up to 2,600


**WS-79636:** Size: 36" Watt: 47W  
 LED Lumens: Up to 4,850 Delivered Lumens: Up to 3,500

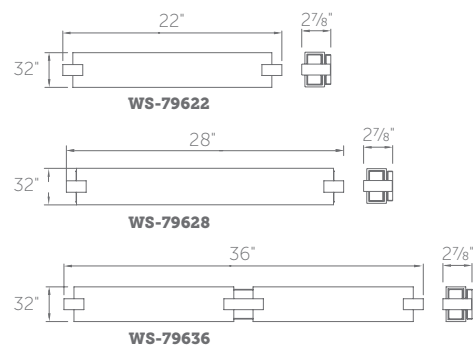

“ Two polished nickel clips gently restrain the tempered, mitered glass diffuser. An elegant meditation on balance. ”

WS-79636-PN shown



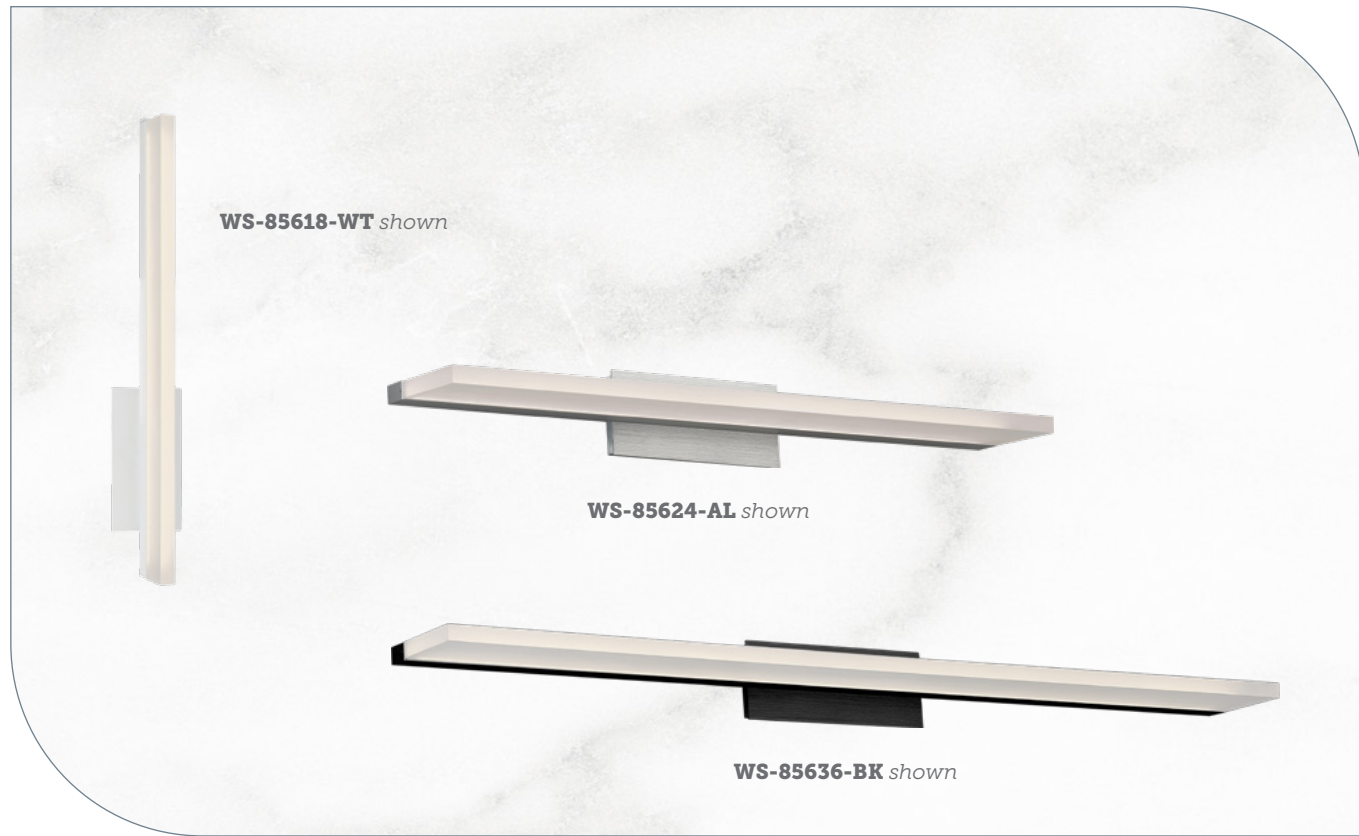

# LEVEL

## 18", 24" & 36" LED SCONCE + BATH

- Frontlight edge-lit LED with etched acrylic diffuser
- Adjustable backplate
- Conversion plate included to accommodate 4" junction box
- Junction box conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations
- ADA compliant for WS-85618 only

Color Temp: 3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 85,000 hours  
 Input: 120V-277V

**WS-85618:** Size: 18" Watt: 16W  
 LED Lumens: 1,300 Delivered Lumens: 865  
**WS-85624:** Size: 24" Watt: 21W  
 LED Lumens: 1,735 Delivered Lumens: 1,255  
**WS-85636:** Size: 36" Watt: 30W  
 LED Lumens: 2,561 Delivered Lumens: 1,762



### Finish

**AL:**  
Brushed Aluminum



**BK:**  
Black

**WT:**  
White

Example: **WS-85618-WT**



“Slender, minimalist design for modern spaces; casts an extensive layer of soft, balanced light throughout your space.”

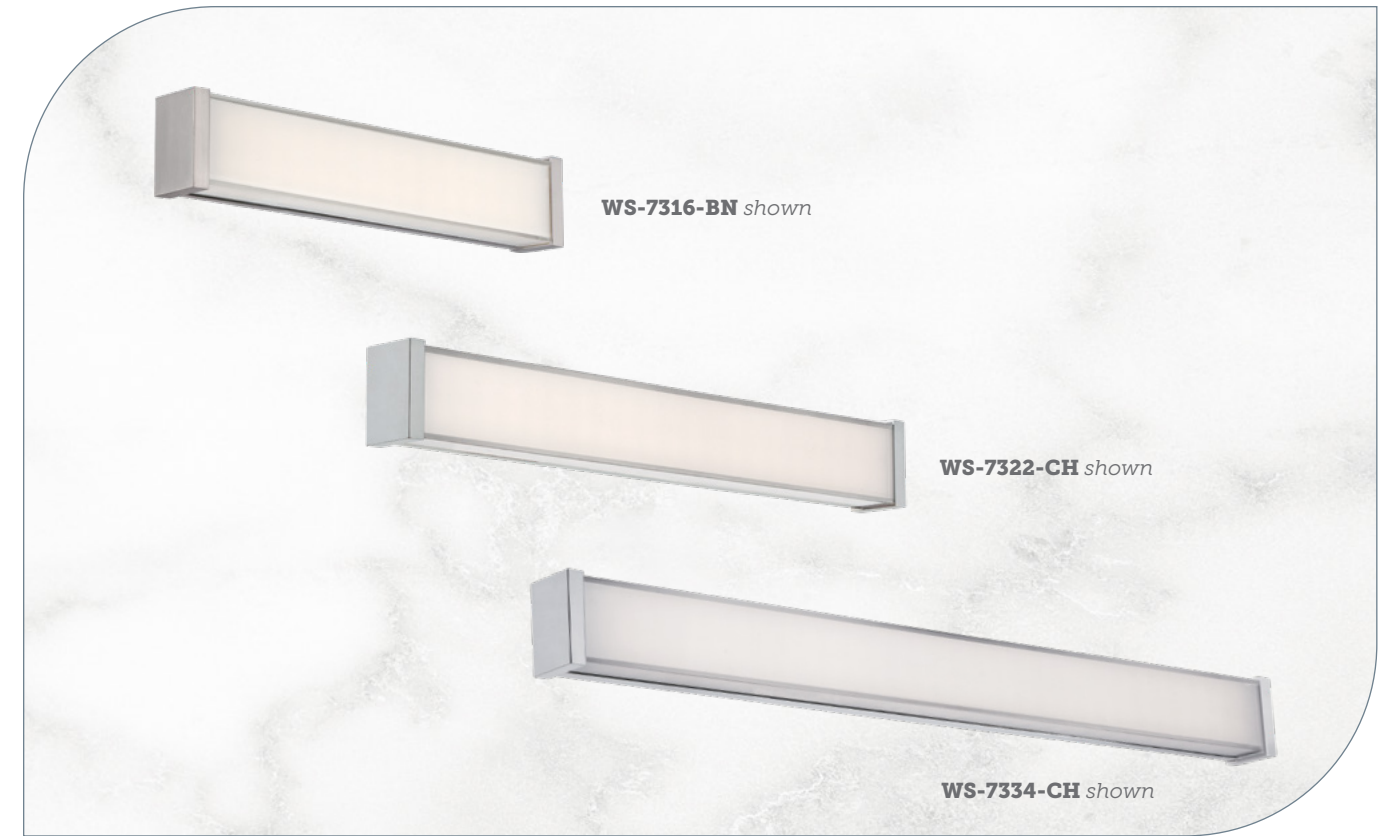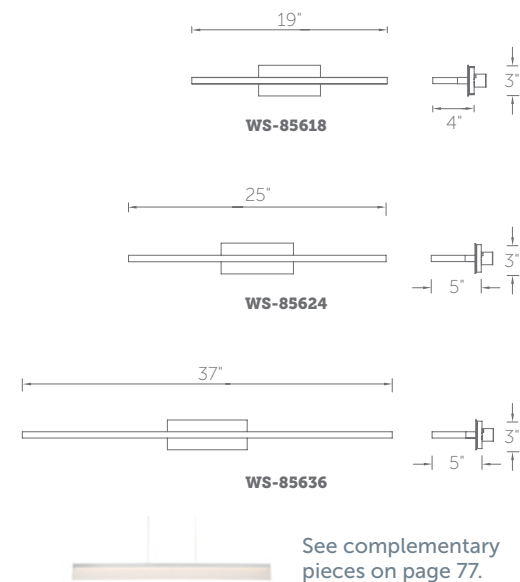

# SVELTE

## 16", 22" & 34" LED SCONCE + BATH

- Frontlight with ceramic silk-screen mitered glass diffuser
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 80,000 hours  
 Input: 120V (277V special order)

**WS-7316:** Size: 16" Watt: 24W  
 LED Lumens: Up to 2,000  
 Delivered Lumens: Up to 1,135

**WS-7322:** Size: 22" Watt: 34W  
 LED Lumens: Up to 2,800  
 Delivered Lumens: Up to 1,632

**WS-7334:** Size: 34" Watt: 54W  
 LED Lumens: Up to 4,400  
 Delivered Lumens: Up to 2,626

### Finish


**BN:**  
Brushed Nickel

**CH:**  
Chrome

Example: **WS-7316-CH**  
 For 277V, add an "F" before the finish: **WS-7316F-CH**



“The picture of refinement.”

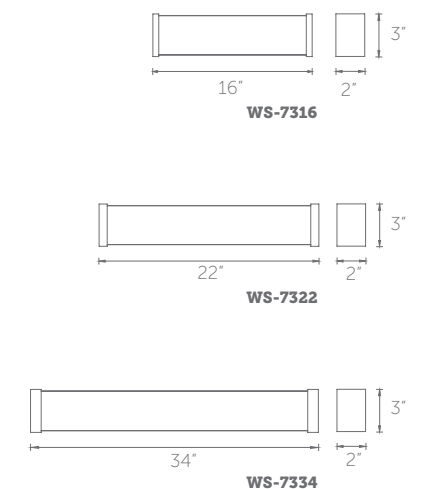

# RONDELLE



WS-42524-AB shown

“ Inspired by collectible antique pole-top insulators, now illuminated as nostalgic lighting fixtures. ”



WS-42505-AB shown



WS-42514-PN shown



## 5", 14" & 24" LED SCONCE + BATH

- Downlight with solid cast glass diffuser
- Junction box conceals a proprietary universal 120V-220V-277V driver






Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 60,000 hours  
 Input: 120V-277V

**WS-42505:** Lights: 1 Watt: 9W  
 LED Lumens: 330 Delivered Lumens: 310

**WS-42514:** Lights: 2 Watt: 16W  
 LED Lumens: 625 Delivered Lumens: 590

**WS-42524:** Lights: 3 Watt: 22W  
 LED Lumens: 1,000 Delivered Lumens: 945

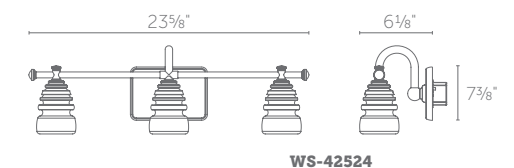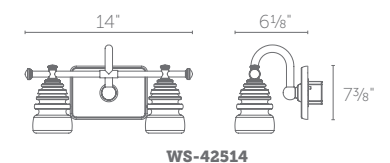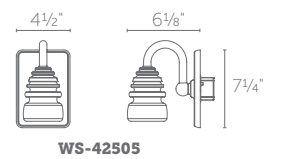

### Finish

**AB:**  
Aged Brass

**PN:**  
Polished Nickel

Example: **WS-42524-AB**



# INTERLACE

## 28" & 38" LED SCONCE + BATH

- Omnidirectional diffused illumination
- Canopy conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**WS-47828:** Size: 28" Watt: 20W  
 LED Lumens: 1,565 Delivered Lumens: 1,174

**WS-47838:** Size: 38" Watt: 28W  
 LED Lumens: 2,183 Delivered Lumens: 1,637

### Finish




**CH:**  
 Chrome


Example: **WS-47828-CH**



“Eternally waving bands of light weave playfully in and out on this flowing modern design.”

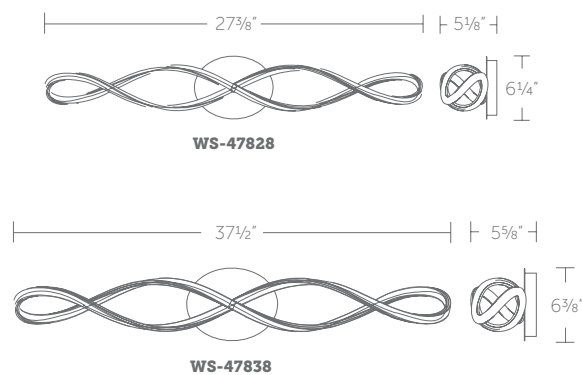

See complementary pieces on page 102-103.

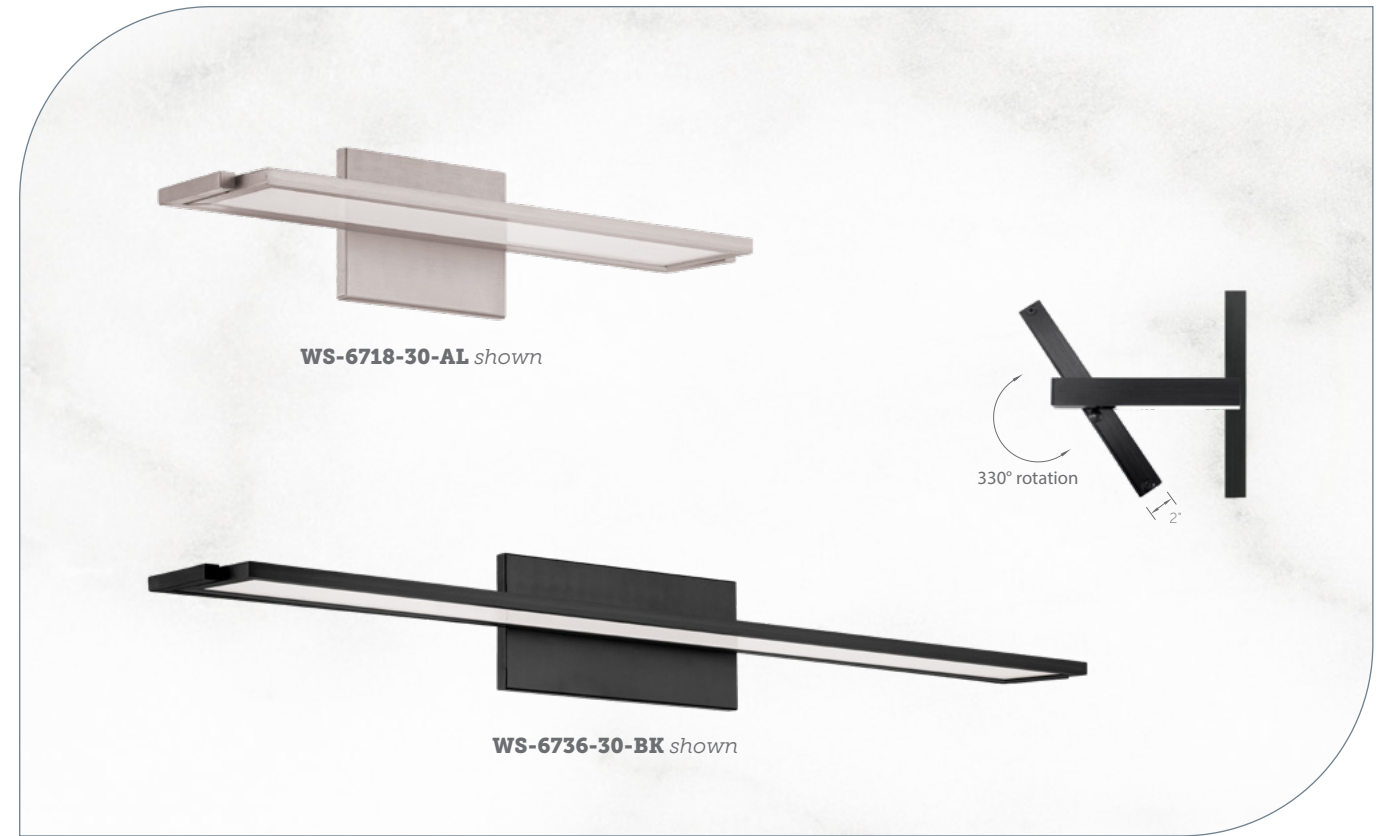

# LINE

## 18", 24" & 36" LED SCONCE + BATH

- Edge-lit LED illumination
- Light source rotates 330 degrees
- Junction box conceals a proprietary 120V transformer
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 80,000 hours  
 Input: 120V (277V special order)

**WS-6718-30:** Size: 18" Watt: 17W  
 LED Lumens: Up to 1,109 Delivered Lumens: Up to 850

**WS-6724-30:** Size: 24" Watt: 22W  
 LED Lumens: Up to 1,478 Delivered Lumens: Up to 1,140

**WS-6736-30:** Size: 36" Watt: 29W  
 LED Lumens: Up to 2,218 Delivered Lumens: Up to 1,520

### Finish



**AL:**  
 Brushed Aluminum




**BK:**  
 Brushed Black

Example: **WS-6718-30-BK**

For 277V, add an "F" before the finish **WS-6718F-30-BK**



“Edge-lit LED panels provide a downward task light free of any hot spots. The luminaire can be rotated to provide direct or indirect illumination as the need arises.”

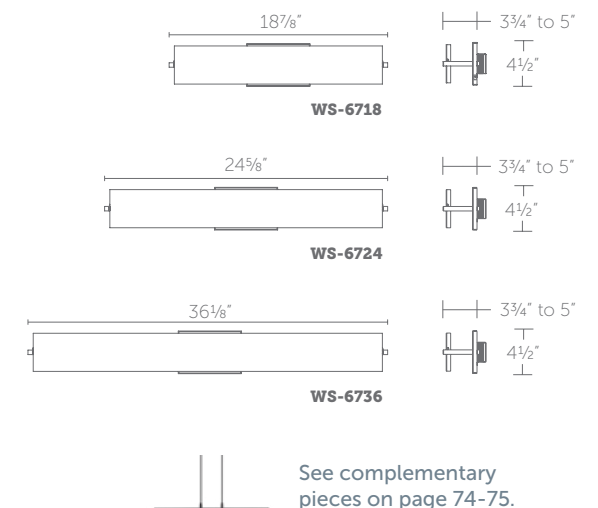

See complementary pieces on page 74-75.



WS-63718-AL shown

WS-63724-AL shown

WS-63736-AL shown

# STRIP

18", 24" & 36" LED SCONCE + BATH

- Frontlight with etched acrylic diffuser
- Adjustable backplate
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- Junction box conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V-277V

**Finish**  
 AL:  
 Brushed Aluminum  
 Example: WS-63718-35-AL


**WS-63718-27, WS-63718-30, WS-63718-35:**  
 Size: 18" Watt: 15W  
 LED Lumens: Up to 1,500 Delivered Lumens: Up to 1,200

**WS-63724-27, WS-63724-30, WS-63724-35:**  
 Size: 24" Watt: 20W  
 LED Lumens: Up to 1,975 Delivered Lumens: Up to 1,640

**WS-63736-27, WS-63736-30, WS-63736-35:**  
 Size: 36" Watt: 29W  
 LED Lumens: Up to 3,020 Delivered Lumens: Up to 2,405



“ Lighting with no boundaries. ”

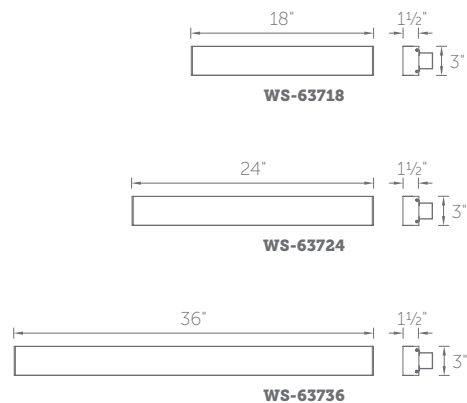

WS-35819-WT shown

WS-35861-AL shown

“ A slender bar of light available in a variety of lengths for a clean and consistent lighting scheme, no matter the size of your environment. ”

# NIGHTSTICK


19", 25", 37", 49", 61", 73" & 97" LED WALL & CEILING

- Frontlight with etched acrylic diffuser
- Conversion plate included to accommodate 4" junction box
- ACLED driverless technology
- May be mounted on ceiling or wall in all orientations

Color Temp: 3000K      Rated Life: 54,000 hours  
 CRI: 90      Input: 120V  
 Dimming: 100% - 10% ELV



2 3/16"  
 1 1/16"



WS-35819



WS-35825



WS-35837



WS-35849



WS-35861



WS-35873



WS-35897

**Finish**  
 AL:  
 Brushed Aluminum  
 WT:  
 White  
 Example: WS-35861-AL

**WS-35819:** Size: 19" Watt: 17W  
 LED Lumens: 1,276 Delivered Lumens: 787

**WS-35825:** Size: 25" Watt: 22W  
 LED Lumens: 1,708 Delivered Lumens: 1,054

**WS-35837:** Size: 37" Watt: 34W  
 LED Lumens: 2,585 Delivered Lumens: 1,595

**WS-35849:** Size: 49" Watt: 44W  
 LED Lumens: 3,399 Delivered Lumens: 2,097

**WS-35861:** Size: 61" Watt: 53W  
 LED Lumens: 4,213 Delivered Lumens: 2,228

**WS-35873:** Size: 73" Watt: 64W  
 LED Lumens: 4,912 Delivered Lumens: 3,031

**WS-35897:** Size: 97" Watt: 84W  
 LED Lumens: 6,458 Delivered Lumens: 3,985



# LED Sconces

Unlocking a myriad of design possibilities, dweLED wall sconces offer something for every interior space. Stylish timeless designs are utilized in many remodels and new construction, to the popular industrial edginess brought by the rapidly-growing urban revival movement. Blending both old and new, ADA compliant, energy efficient sconces are visually appealing, brilliant and engaging, making them the perfect choice for use in private and public spaces.

# MARISE



**WS-79220-BK** shown



**WS-79220-CH** shown



## 20" LED SCONCE

- Omnidirectional diffused illumination
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish




**BK:**  
Black



**CH:**  
Chrome

Example: **WS-79220-BK**

**WS-79220:** Size: 20" Watt: 11W  
 LED Lumens: 1,000 Delivered Lumens: 462

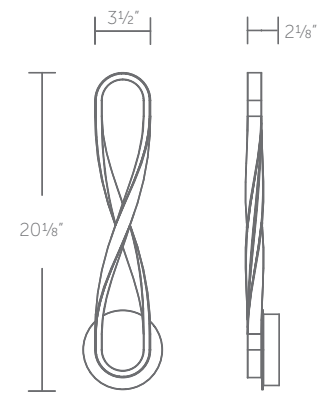

**WS-79220**



See complementary pieces on page 84-85.



“A curvaceous indoor sconce adding elegant drama and a rhythmic vibe to your space.”

**WS-79220-BK** shown

# CORNICE



WS-57205-30-WT shown

“Dramatic double light wall luminaire.”



WS-57205-30-BK shown



WS-57205-30-AB shown



## 5" LED SCONCE

- Up and downlight illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations




Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish

- AB:** Aged Brass
- BK:** Black
- WT:** White

Example: **WS-57205-30-WT**

**WS-57205-27, WS-57205-30, WS-57205-35:**  
 Size: 5" Watt: 15W  
 LED Lumens: 1,200  
 Delivered Lumens: Up to 400

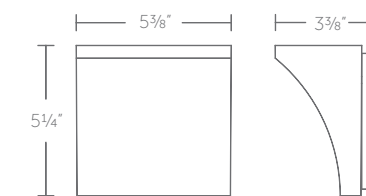

WS-57205

# COLLETTE



WS-59210-30-BN shown



WS-59210-30-BK shown



WS-59210-30-WT shown



## 10" LED SCONCE

- Directional illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish

**AB:**  
Aged Brass


**BK:**  
Black

**BN:**  
Brushed Nickel


**WT:**  
White

Example: **WS-59210-30-AB**

**WS-59210-27, WS-59210-30, WS-59210-35:**  
 Size: 10" Watt: 15W  
 LED Lumens: 1,000 Delivered Lumens: Up to 343

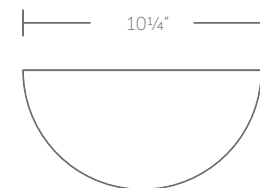

WS-59210



“Stylish aesthetic in the blink of an eye.”


WS-59210-30-AB shown





WS-55206-30-BK shown

“Signature minimalism projects upward and downward illumination.”



WS-55206-30-BK shown



WS-55206-30-WT shown




## 6" LED SCONCE

- Up and downlight illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations




Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish



Example: **WS-55206-30-BK**

**WS-55206-27, WS-55206-30, WS-55206-35:**  
 Size: 6" Watt: 11W  
 LED Lumens: 1,000 Delivered Lumens: Up to 391

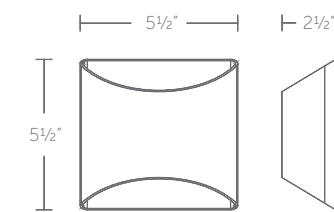

WS-55206

# CAMELOT



WS-61216-AB shown



WS-61216-BK shown



## 16" LED SCENCE

- Edge-lit LED with etched acrylic diffuser
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a 120V driver
- May be mounted on wall in all orientations



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V


### Finish

**AB:**  
Aged Brass

**BK:**  
Black

Example: **WS-61216-AB**

**WS-61216:** Size: 16" Watt: 10W  
 LED Lumens: 850 Delivered Lumens: 428

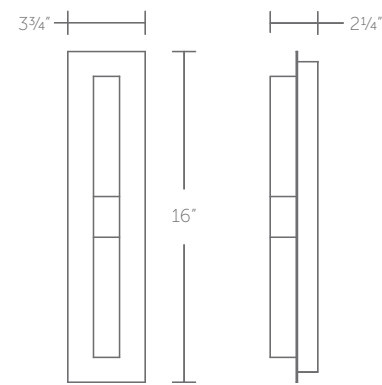

WS-61216



“ A sleek, discerning minimalist scence, curved and visually striking. ”

WS-61216-AB shown

# BLAKE



WS-85212-30-BK shown

“Soulful minimalism shaped with contours and beautiful ambient light.”



WS-85212-30-BK shown



## 12" LED SCONCE

- Etched opal glass diffuser
- Ambient and downward illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish


**BK:**  
Black

Example: **WS-85212-30-BK**

**WS-85212-27, WS-85212-30, WS-85212-35:**

Size: 12" Watt: 17W

LED Lumens: 1,300 Delivered Lumens: Up to 485

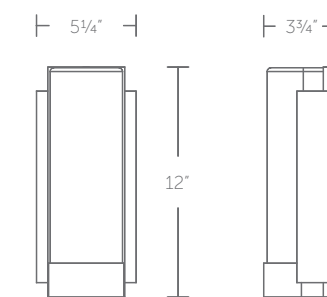

WS-85212



WS-81208-30-BN shown



WS-81208-30-BK shown



## 8" LED SCONCE

- Up and downlight illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish




**BK:**  
Black



**BN:**  
Brushed Nickel

Example: **WS-81208-30-BN**

**WS-81208-27, WS-81208-30, WS-81208-35:**  
 Size: 8" Watt: 11W  
 LED Lumens: Up to 648 Delivered Lumens: Up to 238

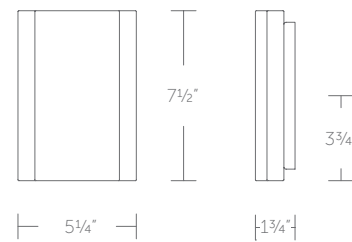

WS-81208




“ Rectilinear juxtaposition of modern minimal lines with classic architectural references. ”

WS-81208-30-BN shown



“ A statement maker  
standout in architectural  
lighting design. ”

WS-83212-BK shown

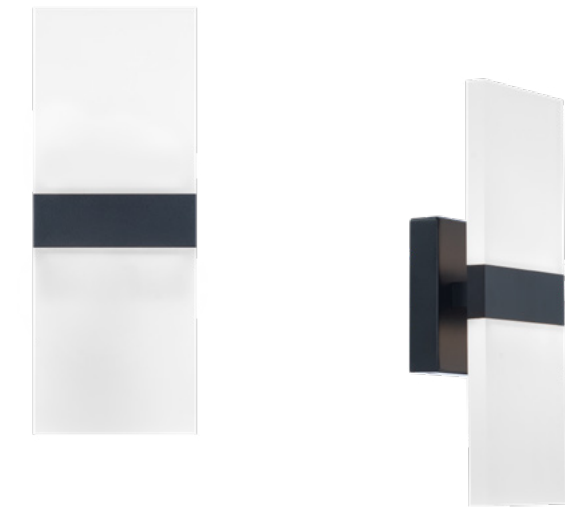

WS-83212-BK shown



## 12" LED SCONCE

- Up and downlight with etched acrylic diffuser
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V/277V

### Finish

**BK:**  
Black

Example: **WS-83212-BK**

**WS-83212:** Size: 12" Watt: 15W  
 LED Lumens: 1,103 Delivered Lumens: 680

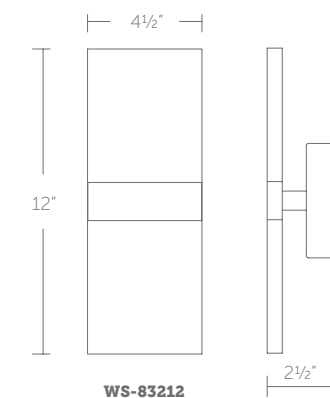



WS-47108-30-BK shown



WS-47116-30-AB shown



## 8" & 16" LED SCONCE

- Fabric shade with etched acrylic diffuser in three coordinating fabric and hardware color combinations
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology




Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

### WS-47108-27, WS-47108-30, WS-47108-35:


Size: 8" Watt: 13W  
 LED Lumens: Up to 1,100  
 Delivered Lumens: Up to 715

### WS-47116-27, WS-47116-30, WS-47116-35:

Size: 16" Watt: 16W  
 LED Lumens: Up to 1,400  
 Delivered Lumens: Up to 866

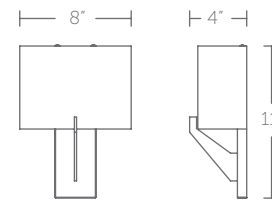

WS-47108

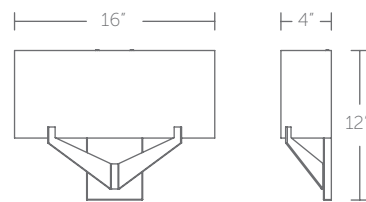

WS-47116

### Finish

- AB:** Aged Brass
- BK:** Black
- BN:** Brushed Nickel

Example: **WS-47116-30-BN**



“Legendary style without pretentiousness.  
 Effortlessly classy.”

WS-47116-30-BN shown



“ Utilitarian wall wash illumination. Elevate the space. ”

WS-45105-30-BN shown



WS-45105-30-AB shown



WS-45105-30-BK shown



WS-45105-30-WT shown

# BOXI

## 5" LED SCONCE

- Up and down light illuminations
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V


**WS-45105-27, WS-45105-30, WS-45105-35:**  
 Size: 5" Watt: 6W  
 LED Lumens: Up to 288  
 Delivered Lumens: Up to 118



### Finish

- AB:** Aged Brass
- BK:** Black
- BN:** Brushed Nickel
- WT:** White

Example: **WS-45105-30-BN**

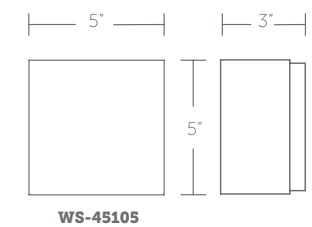

# COLTRANE



WS-43114-30-BK shown



WS-43114-30-AB shown



## 14" LED SCONCE

- Ceramic silk-screen mitered glass diffuser
- Ambient and downward illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 60,000 hours  
 Input: 120V/277V


### WS-43114-27, WS-43114-30, WS-43114-35:

Size: 14" Watt: 13W  
 LED Lumens: Up to 1,367  
 Delivered Lumens: Up to 1,076

### Finish

- AB:** Aged Brass
- BK:** Black

Example: **WS-43114-30-AB**

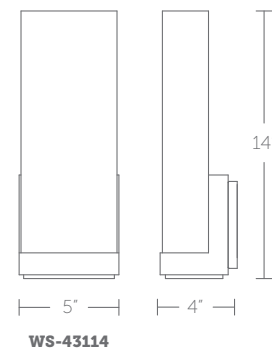

“ A luminary. Standing on the shoulders of giants. ”

WS-43114-30-AB shown



# MANHATTAN



“Sophisticated refinement.  
Tailored and bespoke.”

WS-13115-BK shown



WS-13107-BN shown



WS-13122-BO shown



## 7", 15" & 22" LED SCONCE

- Fabric shade with frosted glass diffuser in three coordinating fabric and hardware color combinations
- ACLED driverless technology



Color Temp: 2700K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-13107:** Size: 7" Watt: 6W  
 LED Lumens: Up to 439 Delivered Lumens: Up to 168


**WS-13115:** Size: 15" Watt: 10W  
 LED Lumens: Up to 842 Delivered Lumens: Up to 317

**WS-13122:** Size: 22" Watt: 16W  
 LED Lumens: Up to 1,268 Delivered Lumens: Up to 527

### Finish

- BK:** Black
- BN:** Brushed Nickel
- BO:** Brushed Bronze

Example: **WS-13122-BK**  
 For 277V add an "F" before the finish: **WS-13115F-BK**

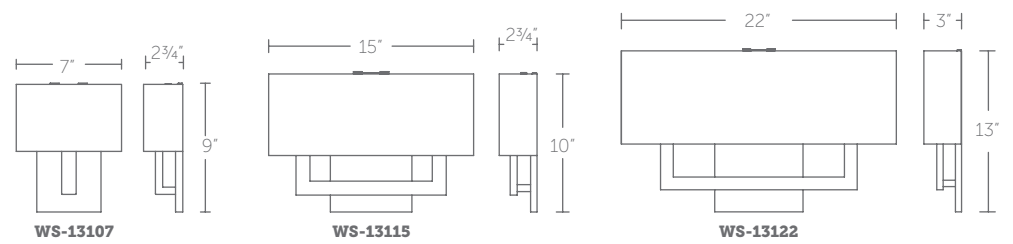

See complementary pieces on page 264-265.



WS-25014-AB shown

WS-25014-BN shown

WS-25014-PN shown

# DRAKE

## 14" LED SCONCE

- Opal glass diffuser with spin on installation
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

**WS-25014:** Size: 14" Watt: 16W  
 LED Lumens: 1,407 Delivered Lumens: 1,007


### Finish

- AB:** Aged Brass
- BN:** Brushed Nickel
- PN:** Polished Nickel

Example: **WS-25014-AB**



“ A simple statement.  
 Beautiful illumination  
 through opal glass atop  
 a polished metal base. ”



WS-25014



WS-21014-BN shown

# MAVEN

## 14" LED SCONCE

- Ambient and downward illumination with etched acrylic diffuser
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 60,000 hours  
 Input: 120V


**WS-21014:** Size: 14" Watt: 23W  
 LED Lumens: 1,800 Delivered Lumens: 940

### Finish

- BN:** Brushed Nickel
- Example: **WS-21014-BN**



“ Classic yet contemporary.  
 An elegant design offering  
 diffused illumination. ”

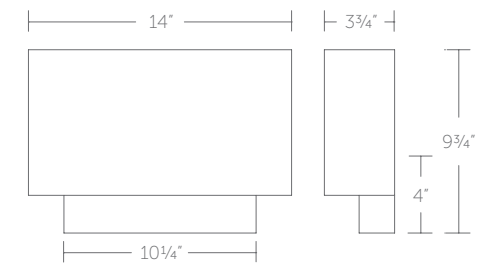

WS-21014

# CLARE



**WS-24016-AB** shown



**WS-24016-CH** shown



## 16" LED SCONCE

- Ambient illumination with opal glass diffuser
- ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

**WS-24016:** Size: 16" Watt: 11W  
 LED Lumens: 832 Delivered Lumens: 743

### Finish



**AB:**  
Aged Brass




**BN:**  
Brushed Nickel



**CH:**  
Chrome

Example: **WS-24016-CH**

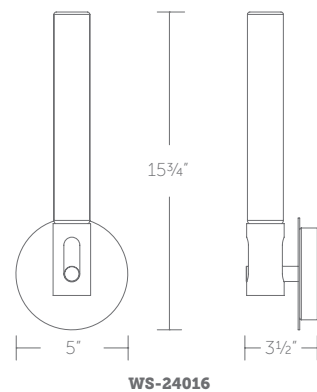

“ Simple and refined. A chic aesthetic in opal glass and polished metal to enhance contemporary and transitional spaces. ”

**WS-24016-BN** shown



WS-27010-AB shown

“An updated classic. Crescent styled element with up and down light perfect for over a vanity, a console or bedside.”



WS-27010-BN shown



WS-27010-AB shown



### 10" LED SCONCE

- Ambient and downward illumination with opal glass diffuser
- Canopy conceals a proprietary 120V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V


#### Finish

**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

Example: **WS-27010-AB**

**WS-27010:** Size: 10" Watt: 18W  
 LED Lumens: 890 Delivered Lumens: 651

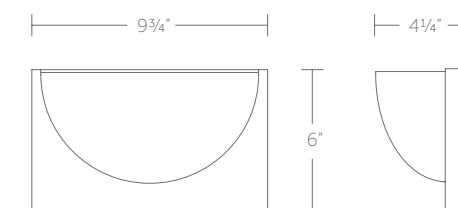

WS-27010



# BLOK

## 12" LED SCONCE



“ Safety and style.  
Emergency battery backup  
concealed within. ”

- Up and downlight illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations
- Emergency battery backup option (special order)

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 70,000 hours  
 Input: 120V-277V


### Finish

**BK:**  
Black

**SN:**  
Satin Nickel

**WT:**  
Textured White

Example: **WS-25612-WT**  
 For emergency battery, add -EM after  
 the finish: **WS-25612-WT-EM**

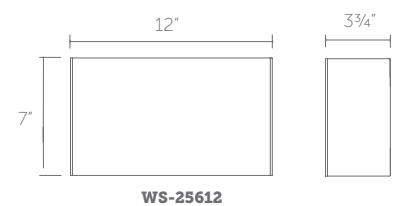

# POCKET

## 7" LED SCONCE



“ An appealing cylindrical  
profile with a powerful LED  
makes the perfect accent. ”

- Up and downlight illumination
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

**WS-30907:** Size: 7" Watt: 22W  
 LED Lumens: 1,018 Delivered Lumens: 713

### Finish


**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

**BK:**  
Black

**WT:**  
White

Example: **WS-30907-AB**

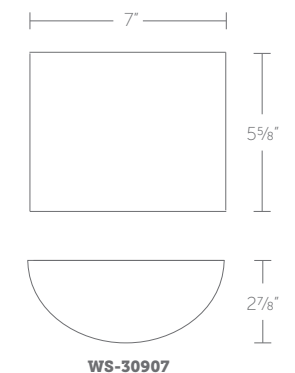

# SEVILLE



WS-28021-AB shown



WS-28021-BN shown



TITLE 24  
CALIFORNIA

## 21" LED SCONCE

- Fabric shade with etched acrylic diffuser
- Ambient and downward illumination
- Canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V


### Finish

 **AB:**  
Aged Brass

 **BN:**  
Brushed Nickel

Example: **WS-28021-AB**

**WS-28021:** Size: 21" Watt: 15W  
 LED Lumens: 1,800 Delivered Lumens: 828

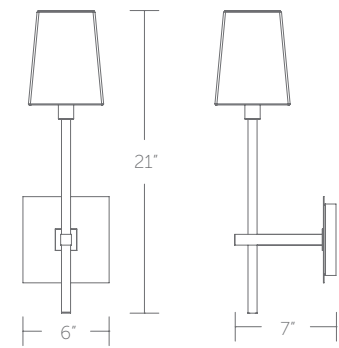

WS-28021



“Bridging traditional with a clean modern appeal.”

WS-28021-AB shown



WS-12712-PN shown

WS-12713-PN shown

WS-12718-PN shown

WS-12724-PN shown

# MYTHICAL

## 12", 13", 18" & 24" LED SCONCE

- Edge lit seeded clear glass diffuser
- Junction box conceals a proprietary universal 120V-220V-277V driver (12")
- ACLED driverless technology (13", 18" & 24")

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours (12"),  
 54,000 hours (13", 18" & 24")  
 Input: 120V-277V (12"),  
 120V (277V special order) (13", 18" & 24")


### Finish



**PN:**  
Polished Nickel

Example: **WS-12712-PN**  
 Example: **WS-12718-PN**  
 For 277V (13", 18" & 24"), add an  
 "F" before the finish: **WS-12718F-PN**

**WS-12712:** Size: 12" Watt: 11W  
 LED Lumens: 858 Delivered Lumens: 418  
**WS-12713:** Size: 13" Watt: 8W  
 LED Lumens: 392 Delivered Lumens: 139  
**WS-12718:** Size: 18" Watt: 16W  
 LED Lumens: 771 Delivered Lumens: 333  
**WS-12724:** Size: 24" Watt: 16W  
 LED Lumens: 730 Delivered Lumens: 326

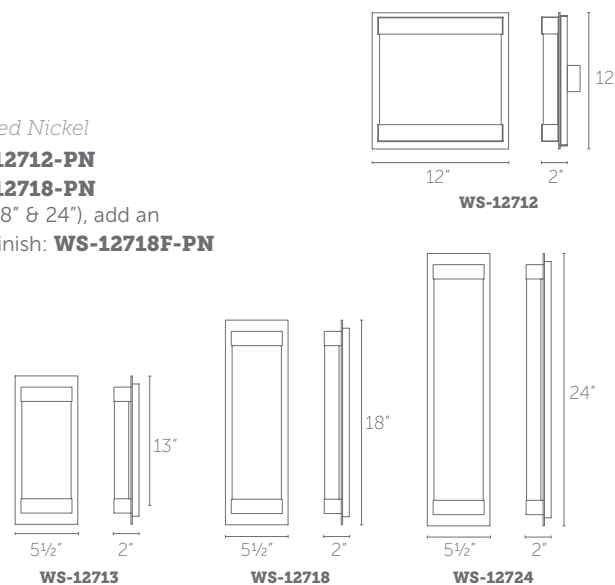

“Sparkling effervescence of light.”



WS-42618-SN shown

# CORBUSIER

## 15" LED SCONCE

- Frontlight with ceramic silk-screen mitered glass diffuser
- Junction box conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K (2700K / 3500K special order)  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 85,000 hours  
 Input: 120V-277V

**WS-42618:** Size: 15" Watt: 20W  
 LED Lumens: 1,476 Delivered Lumens: 827

### Finish




**SN:**  
Satin Nickel

Example: **WS-42618-SN**  
 For 2700K add "-27"; 3500K add "-35"  
 before the finish: **WS-42618-27-SN**



“Upstanding and architectural.”

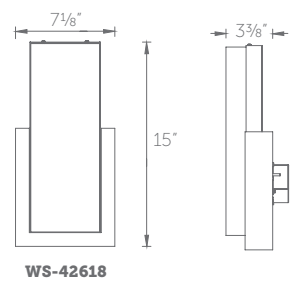



WS-40615-SN shown

# MODERNE

## 15" LED SCONCE

- Frontlight with etched opal glass diffuser
- Junction box conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K (2700K / 3500K special order)  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 55,000 hours  
 Input: 120V-277V


**WS-40615:** Size: 15" Watt: 20W  
 LED Lumens: 1,482 Delivered Lumens: 887

### Finish

**SN:**  
 Satin Nickel  
 Example: **WS-40615-SN**  
 For 2700K add "-27"; 3500K add "-35"  
 before the finish: **WS-40615-27-SN**



“ Art Deco inspired elegance. ”

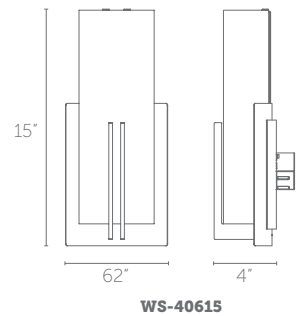

WS-45620-SN shown

# PROHIBITION

## 20" LED SCONCE

- Frontlight with etched opal glass diffuser
- Junction box conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K (2700K / 3500K special order)  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 55,000 hours  
 Input: 120V-277V


**WS-45620:** Size: 20" Watt: 18W  
 LED Lumens: 1,377 Delivered Lumens: 817

### Finish

**SN:**  
 Satin Nickel  
 Example: **WS-45620-SN**  
 For 2700K add "-27"; 3500K add "-35"  
 before the finish: **WS-45620-27-SN**



“ Modern for today while nostalgic of a different time. ”

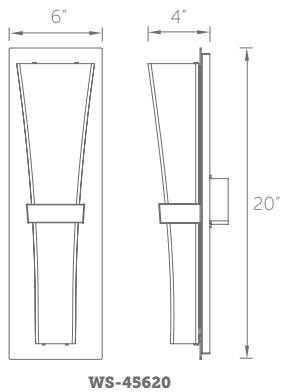





# LED Bedside + Swing Arms

Providing light for reading new bestselling novels, illuminating that recently purchased art piece on the wall or highlighting a plant on an occasional table. Task versatility and functionality are demonstrated with powerful LED luminaires that communicate perfect illumination by your bedside or reading area. Fingertip control and adjustability, with just the right dimming, adds ease and convenience with beautiful accent lighting. On/off toggle switches and aiming capabilities, combined with full spectrum lighting, enhance the color pigments of your illuminated target. Adjusting your task light and adapting to your specific needs.

# KEPLER



**BL-21205-BN** shown



**BL-21205-BK** shown



**BL-21205-WT** shown



## 5" LED BEDSIDE LAMP

- On/off toggle switch on the canopy
- USB port on the bottom of the canopy for charging
- Light source offers 330 degree horizontal rotation and a 90 degree vertical tilt
- Thin canopy conceals a proprietary universal 120V-220V-277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 80,000 hours  
 Input: 120V-277V

**BL-21205:** Size: 5" Watt: 8W  
 LED Lumens: 357 Delivered Lumens: 108

### Finish

- AB:** Aged Brass
- BK:** Black
- BN:** Brushed Nickel
- WT:** White

Example: **BL-21205-AB**

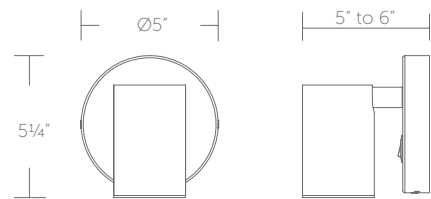

**BL-21205**



**USB Port on the Canopy**



“Using fingertip control to activate or adjust the light, this task lamp is a compact spot featuring a USD port for charging devices.”

**BL-21205-AB** shown



BL-25214-BK/SI shown

“A high performing and stylish ACLED adjustable spot light designed as a reading lamp or a bedside wall lamp. Rotatable arm, on/off toggle and USB port for charging devices.”



BL-25214-BK/SI shown



BL-25214-BN shown



## 14" LED BEDSIDE LAMP

- On/off toggle switch on the canopy
- USB port on the bottom of the canopy for charging
- Arm offers 180 degree horizontal rotation
- ACLED driverless technology




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish

- BK/SI:**  
Black/Silver
- BN:**  
Brushed Nickel

Example: **BL-25214-BK/SI**

**BL-25214:** Size: 14" Watt: 8W  
 LED Lumens: 416 Delivered Lumens: 344

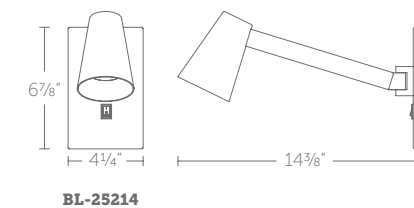

USB Port on the Canopy

# SPRIG



**BL-23210-WT** shown



**BL-23210-BK** shown



## 10" LED BEDSIDE LAMP

- On/off toggle switch on the canopy
- USB port on the bottom of the canopy for charging
- Arm offers 180 degree horizontal rotation
- Light source offers 300 degree horizontal rotation and a 180 degree vertical tilt
- Thin canopy conceals a 120V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish

- BK:** Black
- BN:** Brushed Nickel
- WT:** White

Example: **BL-23210-BN**

**BL-23210:** Size: 10" Watt: 5W  
 LED Lumens: 400 Delivered Lumens: 287

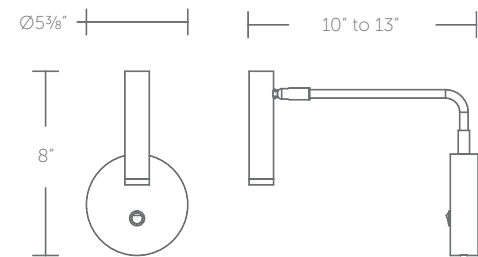

**BL-23210**



**USB Port on the Canopy**



“Adjustable task lighting at your fingertips, on the wall or at your bedside. Perfect for reading with a 180° rotatable arm, 90° vertical tilt and a 350° rotatable lamp.”

**BL-23210-BN** shown



BL-59110-AB shown

“Sensible style. A clean and well mannered delight.”



BL-59110-BN shown



BL-59110-AB shown

# PENCIL SKIRT

## 10" LED BEDSIDE LAMP



- Up and downlight with etched opal glass
- On/off toggle switch on the canopy
- Light source offers 330 degree horizontal rotation and a 90 degree vertical tilt
- ACLED driverless technology


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

**BL-59110:** Size: 10" Watt: 11W  
 LED Lumens: 826 Delivered Lumens: 367

### Finish

-  **AB:**  
Aged Brass
-  **BN:**  
Brushed Nickel

Example: **BL-59110-AB**

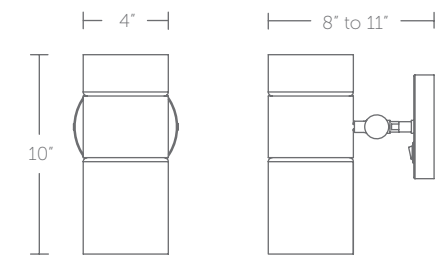

BL-59110



**BL-57108-BK/AB** shown



### 8" LED BEDSIDE LAMP

- On/off toggle switch on the canopy
- Light source offers 330 degree horizontal rotation and a 90 degree vertical tilt
- ACLED driverless technology




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

#### Finish

**BK/AB:**  
 Black/Aged Brass  
 Example: **BL-57108-BK/AB**

**BL-57108:** Size: 8" Watt: 11W  
 LED Lumens: 823 Delivered Lumens: 129

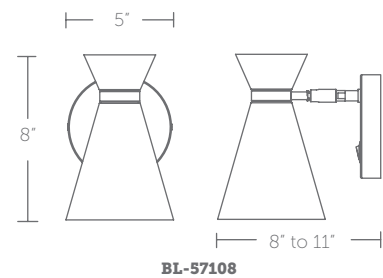

“Cinched at the waist. Nostalgic of 1950's fashion and attire.”

**BL-57108-BK/AB** shown



BL-48007-BK/AB shown



BL-48007-BK/BN shown

# ARNE

## 7" LED BEDSIDE LAMP

- Fingertip touch on/off switch and dimming on the canopy
- Light source offers 330 degree horizontal rotation and a 90 degree vertical tilt
- Canopy conceals a 100V-240V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% (Integral dimmer)  
 Rated Life: 50,000 hours  
 Input: 100V-240V

BL-48007: Size: 7" Watt: 9W  
 LED Lumens: 416 Delivered Lumens: 168

### Finish

- BK/AB:** Black/Aged Brass
- BK/BN:** Black/Brushed Nickel

Example: BL-48007-BK/AB

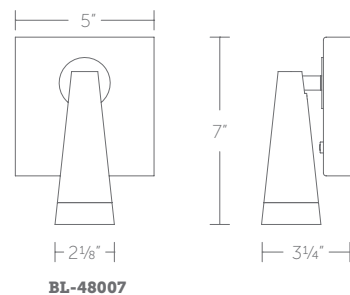

BL-48007



“Inspired mid-century modern design. An adjustable and touch-dimming reading light.”

# EERO

## 18" LED BEDSIDE LAMP

- Fingertip touch on/off switch and dimming on the canopy
- Arm offers 180 degree horizontal rotation
- Light source offers 230 degree horizontal rotation
- Canopy conceals a 100V-240V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% (Integral dimmer)  
 Rated Life: 50,000 hours  
 Input: 100V-240V

BL-49018: Size: 18" Watt: 9W  
 LED Lumens: 200 Delivered Lumens: 111

### Finish

- AB:** Aged Brass
- BK:** Black
- BN:** Brushed Nickel

Example: BL-49018-BN

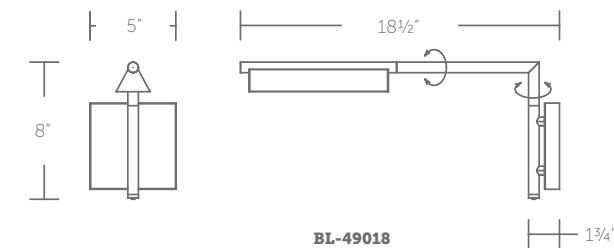

BL-49018



Rotatable Arm and Fixture



“A rotating light and laterally adjusting arm for targeted and powerful task lighting.”



BL-83023-AB shown

“ A classic table lamp style transformed into a sconce with an adjustable arm for bed-sides or offices. ”



BL-83023-BN shown



BL-83023-BK shown



## 23" LED BEDSIDE LAMP

- Fabric shade with etched acrylic diffuser
- Articulated arm frictions into place
- Fingertip touch on/off switch and dimming on the canopy
- Canopy conceals a 120V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% (Integral dimmer)  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish

- AB:** Aged Brass
  - BK:** Black
  - BN:** Brushed Nickel
- Example: **BL-83023-AB**

**BL-83023:** Size: 23" Watt: 8W  
 LED Lumens: 1,000 Delivered Lumens: 499

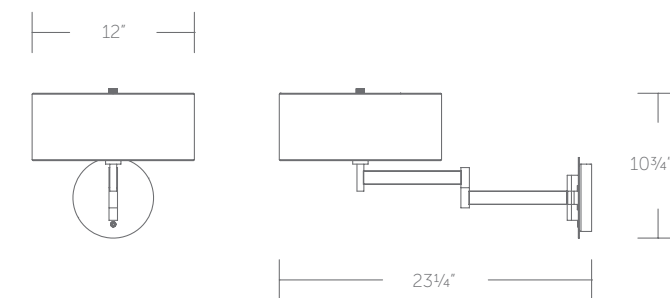

BL-83023





# FLIP

## LED BEDSIDE LAMP

- Articulated arm frictions into place
- Fingertip touch on/off switch and dimming on head
- Two 12 inch cord covers included for portable installation
- Canopy conceals a 100V-240V driver

Color Temp: 3000K  
 CRI: 85  
 Dimming: 100% - 10% (integral dimmer)  
 Rated Life: 30,000 hours  
 Input: 100V-240V

### Finish

- BK:** Black
- BZ:** Bronze
- TT:** Titanium



Example: **BL-1021L-BZ**

**BL-1021L:** Size: Left Watt: 9W  
 LED Lumens: 489 Delivered Lumens: 315

**BL-1021R:** Size: Right Watt: 9W  
 LED Lumens: 489 Delivered Lumens: 315



“ Bauhaus and beautiful.  
 Versatile design and function. ”

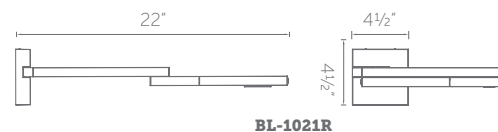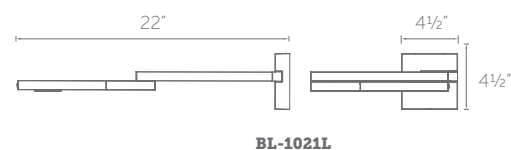

# SCOPE

## 7" LED BEDSIDE LAMP

- On-off switch on fixture
- Light source offers 330 degree horizontal rotation
- 8 ft cord included for hard-wired and portable installation
- Canopy conceals a 120V driver
- Surface mount or recessed mount

Color Temp: 3000K  
 CRI: 90  
 Rated Life: 50,000 hours  
 Input: 120V


### Finish

- BK:** Black
- BN:** Brushed Nickel
- WT:** White

Example: **BL-29903-BN**



“ A neat, compact architectural  
 design with convenient  
 fingertip control to produce  
 clean, directional illumination  
 for reading spaces. ”

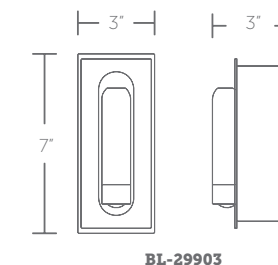



PL-16017-AL shown



PL-16027-BK shown





## 17" & 27" LED PICTURE LIGHT

- Light source rotates 330 degrees
- Decorative plate and 1" slim junction box included
- Thin canopy conceals a universal 120V-220V-277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish


-  **AL:** Brushed Aluminum
  -  **BK:** Anodized Black
- Example: **PL-16027-AL**

**PL-16017:** Size: 17" Watt: 15W  
 LED Lumens: 1,000 Delivered Lumens: 722

**PL-16027:** Size: 27" Watt: 18W  
 LED Lumens: 1,600 Delivered Lumens: 1,297

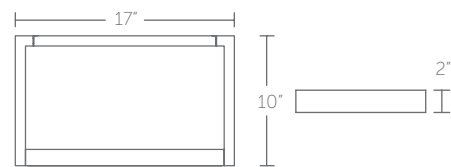

PL-16017

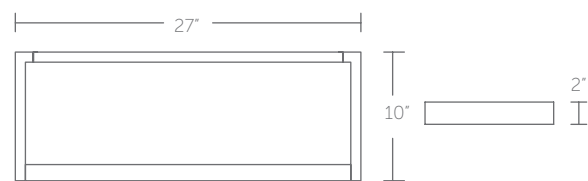

PL-16027



See complementary pieces on page 46-49.



“Simple and sophisticated aesthetic. Rotating element optimizes functionality.”

PL-16027-AL shown



# UPTOWN

## 17", 25" & 34" LED PICTURE LIGHT

- Light source rotates 180 degrees
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish

**BK:**  
Black




**BN:**  
Brushed Nickel

Example: **PL-52017-BN**

**PL-52017:** Size: 17" Watt: 15W  
 LED Lumens: 1,048 Delivered Lumens: 883  
**PL-52025:** Size: 25" Watt: 21W  
 LED Lumens: 1,326 Delivered Lumens: 926  
**PL-52034:** Size: 34" Watt: 26W  
 LED Lumens: 1,772 Delivered Lumens: 1,329



“ Robust LED illumination. Preserve colors in artwork while delivering superior color rendering. ”

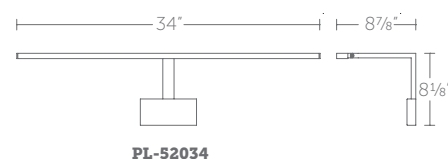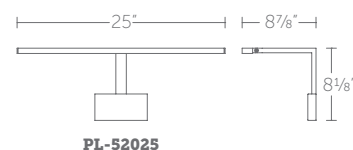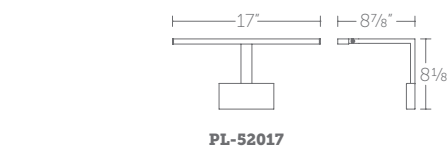

# KENT

## 11", 17" & 23" LED PICTURE LIGHT

- Light source rotates 180 degrees
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish

**AB:**  
Aged Brass

**BK:**  
Black




**BN:**  
Brushed Nickel

Example: **BL-83023-AB**

**PL-50011:** Size: 11" Watt: 8W  
 LED Lumens: 600 Delivered Lumens: 287  
**PL-50017:** Size: 17" Watt: 12W  
 LED Lumens: 1,000 Delivered Lumens: 479  
**PL-50023:** Size: 23" Watt: 18W  
 LED Lumens: 1,400 Delivered Lumens: 792



“ Influential and substantial. Showcase artwork or bookcases with stylish LED illumination. ”

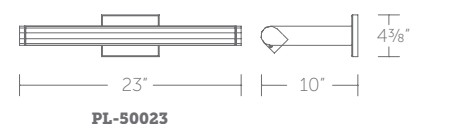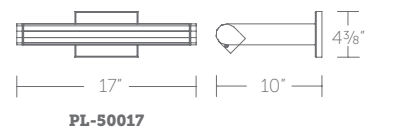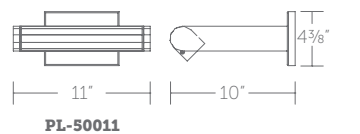



PL-11025-BN shown

“The perfect complement to any display piece. Conserves fine art while providing superior color rendering.”





## 17", 25" & 33" LED PICTURE LIGHT




- Light source rotates 150 degrees
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a proprietary universal 120V-220V-277V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 5% 0-10V, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**PL-11017:** Size: 17" Watt: 18W  
 LED Lumens: 569 Delivered Lumens: 380  
**PL-11025:** Size: 25" Watt: 21W  
 LED Lumens: 825 Delivered Lumens: 544  
**PL-11033:** Size: 33" Watt: 28W  
 LED Lumens: 1,072 Delivered Lumens: 747

### Finish

-  **BK:** Black
  -  **BN:** Brushed Nickel
- Example: **PL-11025-BN**

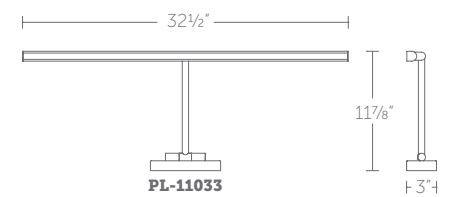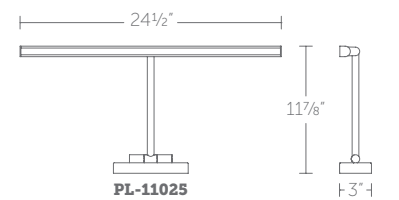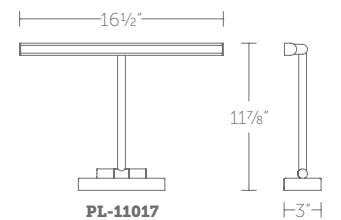

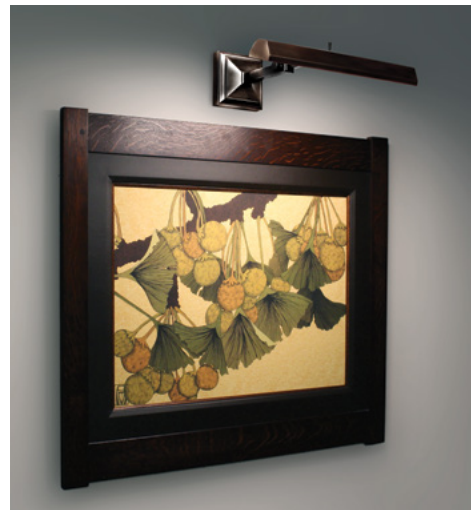

PL-LED14-27-RB shown



PL-LED14-27-BB shown



PL-LED24-27-PN shown

# HEMMINGWAY

## 14" & 24" LED PICTURE LIGHT

- Light source rotates 90 degrees
- Canopy conceals a proprietary 120V transformer

Color Temp: 2700K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 70,000 hours  
 Input: 120V


### Finish

- BB:** Burnished Brass
- RB:** Rubbed Bronze
- PN:** Polished Nickel

Example: **PL-LED24-27-PN**

**PL-LED14-27:** Size: 14" Watt: 9W  
 LED Lumens: 595 Delivered Lumens: 302

**PL-LED24-27:** Size: 24" Watt: 17W  
 LED Lumens: 1,186 Delivered Lumens: 605

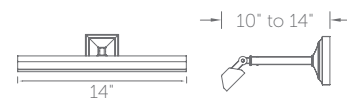

PL-LED14



PL-LED24



“ Slim, minimal picture light highlights fine pieces of art with vibrant color rendition, employing proprietary Chronophoton Technology. ”

# HUDSON

## 17", 24" & 34" LED PICTURE LIGHT

- Light source rotates 180 degrees
- Conversion plate included to accommodate 4" junction box
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish

- AB:** Aged Brass
- BK:** Black

Example: **PL-LED17-30-BK**


**PL-LED17-30:** Size: 17" Watt: 14W  
 LED Lumens: 1,125 Delivered Lumens: 811

**PL-LED23-30:** Size: 24" Watt: 18W  
 LED Lumens: 1,490 Delivered Lumens: 1,078

**PL-LED34-30:** Size: 34" Watt: 24W  
 LED Lumens: 1,992 Delivered Lumens: 1,500




“ Fine art illuminated. Available in two designer finishes to complement upscale artwork. ”

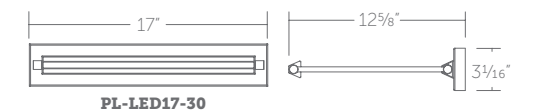


PL-LED17-30



PL-LED23-30

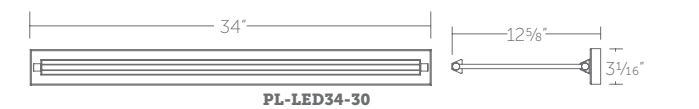

PL-LED34-30

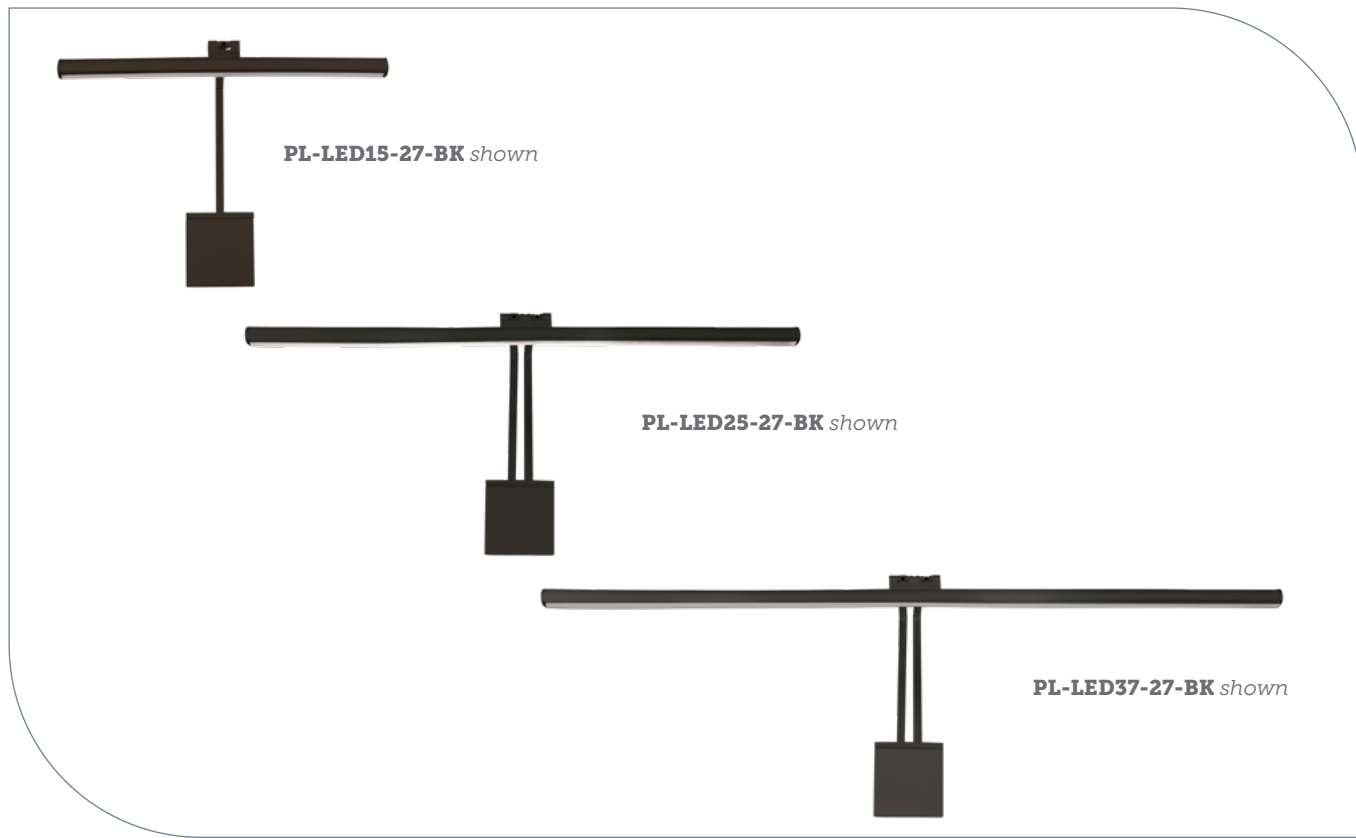

# VIBE

## 15", 25" & 37" LED PICTURE LIGHT

- Light source rotates 70 degrees
- Junction box conceals a proprietary 120V transformer

Color Temp: 2700K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 70,000 hours  
 Input: 120V

### Finish

**BK:** Black  
 Example: **PL-LED25-27-BK**


**PL-LED15-27:** Size: 15" Watt: 10W  
 LED Lumens: 595 Delivered Lumens: 240

**PL-LED25-27:** Size: 25" Watt: 17W  
 LED Lumens: 1,186 Delivered Lumens: 535

**PL-LED37-27:** Size: 37" Watt: 26W  
 LED Lumens: 1,785 Delivered Lumens: 850



“ The back plate mounts on the wall, and provides a channel for the art frame to hang on up to 20lbs. ”

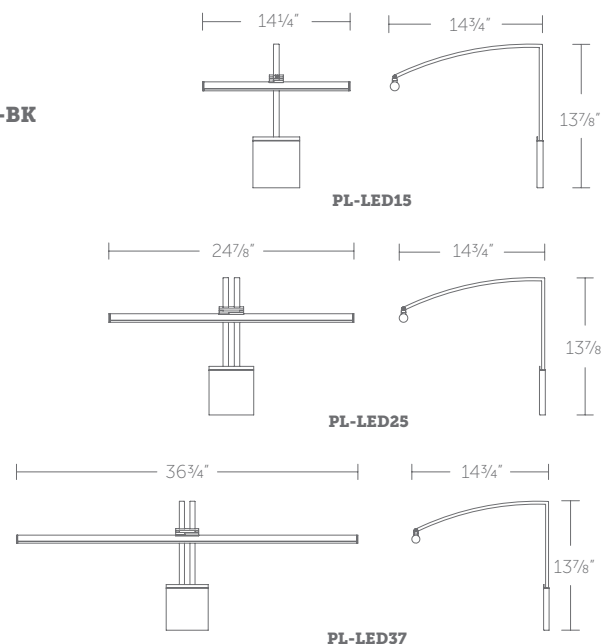

# STRETCH

## LED BEDSIDE LAMP

- Flexible, yet fixable rubber tube for directing light
- Fingertip touch on/off switch and dimming on the canopy
- Conversion plate included to accommodate 4" junction box
- Two 12" cord covers, and 8ft cord for hardwired or portable installation
- Canopy conceals a 120V driver


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% (Integral dimmer)  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish

**BK:** Black  
**TT:** Titanium  
**WT:** White  
 Example: **BL-1630-BK**



“ Contemporary, utilitarian and cool, personalized fingertip control lighting with an adjustable rubberized arm that directs illumination wherever needed. ”

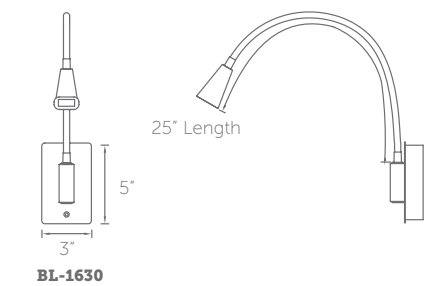




# LED Ceiling Mounts

Designed to provide general or decorative lighting throughout your space, LED ceiling mounts boast clean lines, understated minimalism, a modern aesthetic and comfortable feel that your family and guests will enjoy. Sleek and stylish, dweLED ceiling luminaires dispatch a minimalistic retro appeal and ample illumination for a broad range of environments, including residential, multifamily, commercial and healthcare.



**FM-43222-CH** shown

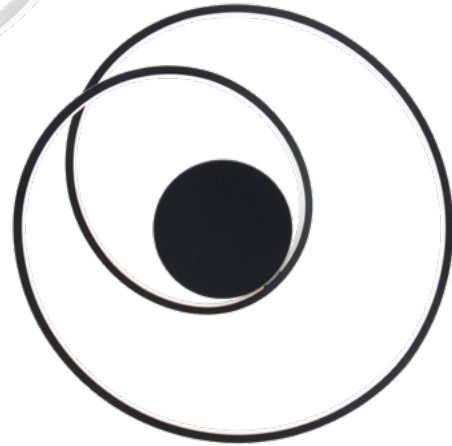

**FM-43222-BK** shown



## 22" LED CEILING MOUNT

- Thin canopy conceals a 120V driver
- May be mounted on ceiling or wall


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

**FM-43222:** Size: 22" Watt: 41W  
 LED Lumens: 2,300 Delivered Lumens: 1,146

### Finish

- BK:** Black
- BN:** Brushed Nickel
- CH:** Chrome

Example: **FM-43222-BN**

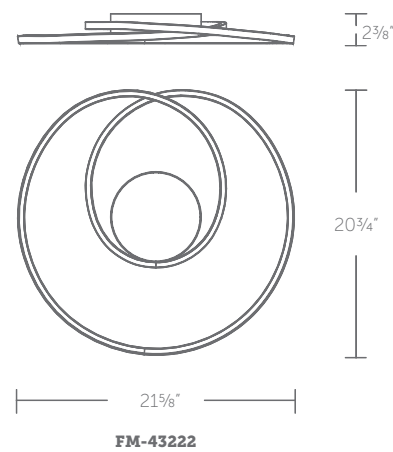

See complementary pieces on page 32-33.



“Modern halos of light complement in tandem, juxtaposed in positions evoking celestial movement.”

**FM-43222-BN** shown





FM-27218-AB shown



FM-27214-AB shown



FM-27218-BK shown



### 14" & 18" LED CEILING MOUNT

- Faux alabaster. Like real stone, each piece is unique.
- Etched acrylic diffuser
- Thin canopy conceals a 120V driver
- May be mounted on ceiling or wall



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V


#### Finish

- AB:** Aged Brass
- BK:** Black


Example: **FM-27218-AB**

**FM-27214:** Size: 14" Watt: 25W  
 LED Lumens: 1,779 Delivered Lumens: 1,024

**FM-27218:** Size: 18" Watt: 36W  
 LED Lumens: 2,955 Delivered Lumens: 1,515

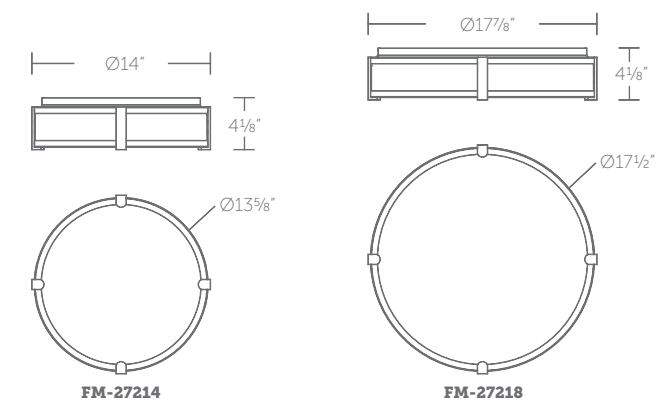

# CHAUCER

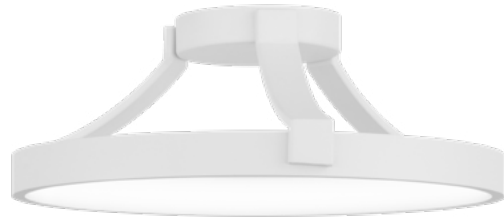

FM-63216-WT shown



FM-63216-BK shown



TITLE 24  
CALIFORNIA

PATENT  
PENDING



## 16" LED CEILING MOUNT

- Thin canopy conceals a proprietary universal 120V-220V-277V driver
- May be mounted on ceiling or wall



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish





**BK:**  
Black



**WT:**  
White

Example: **FM-63216-WT**

**FM-63216:** Size: 16" Watt: 24W  
 LED Lumens: 2,200 Delivered Lumens: 1,204

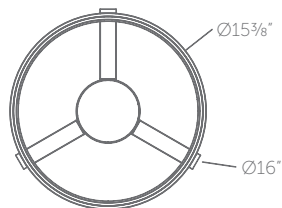


FM-63216



“Modern minimalism comes to light with robust black aluminum and powerful LEDs embedded within the diffuser.”

FM-63216-WT shown

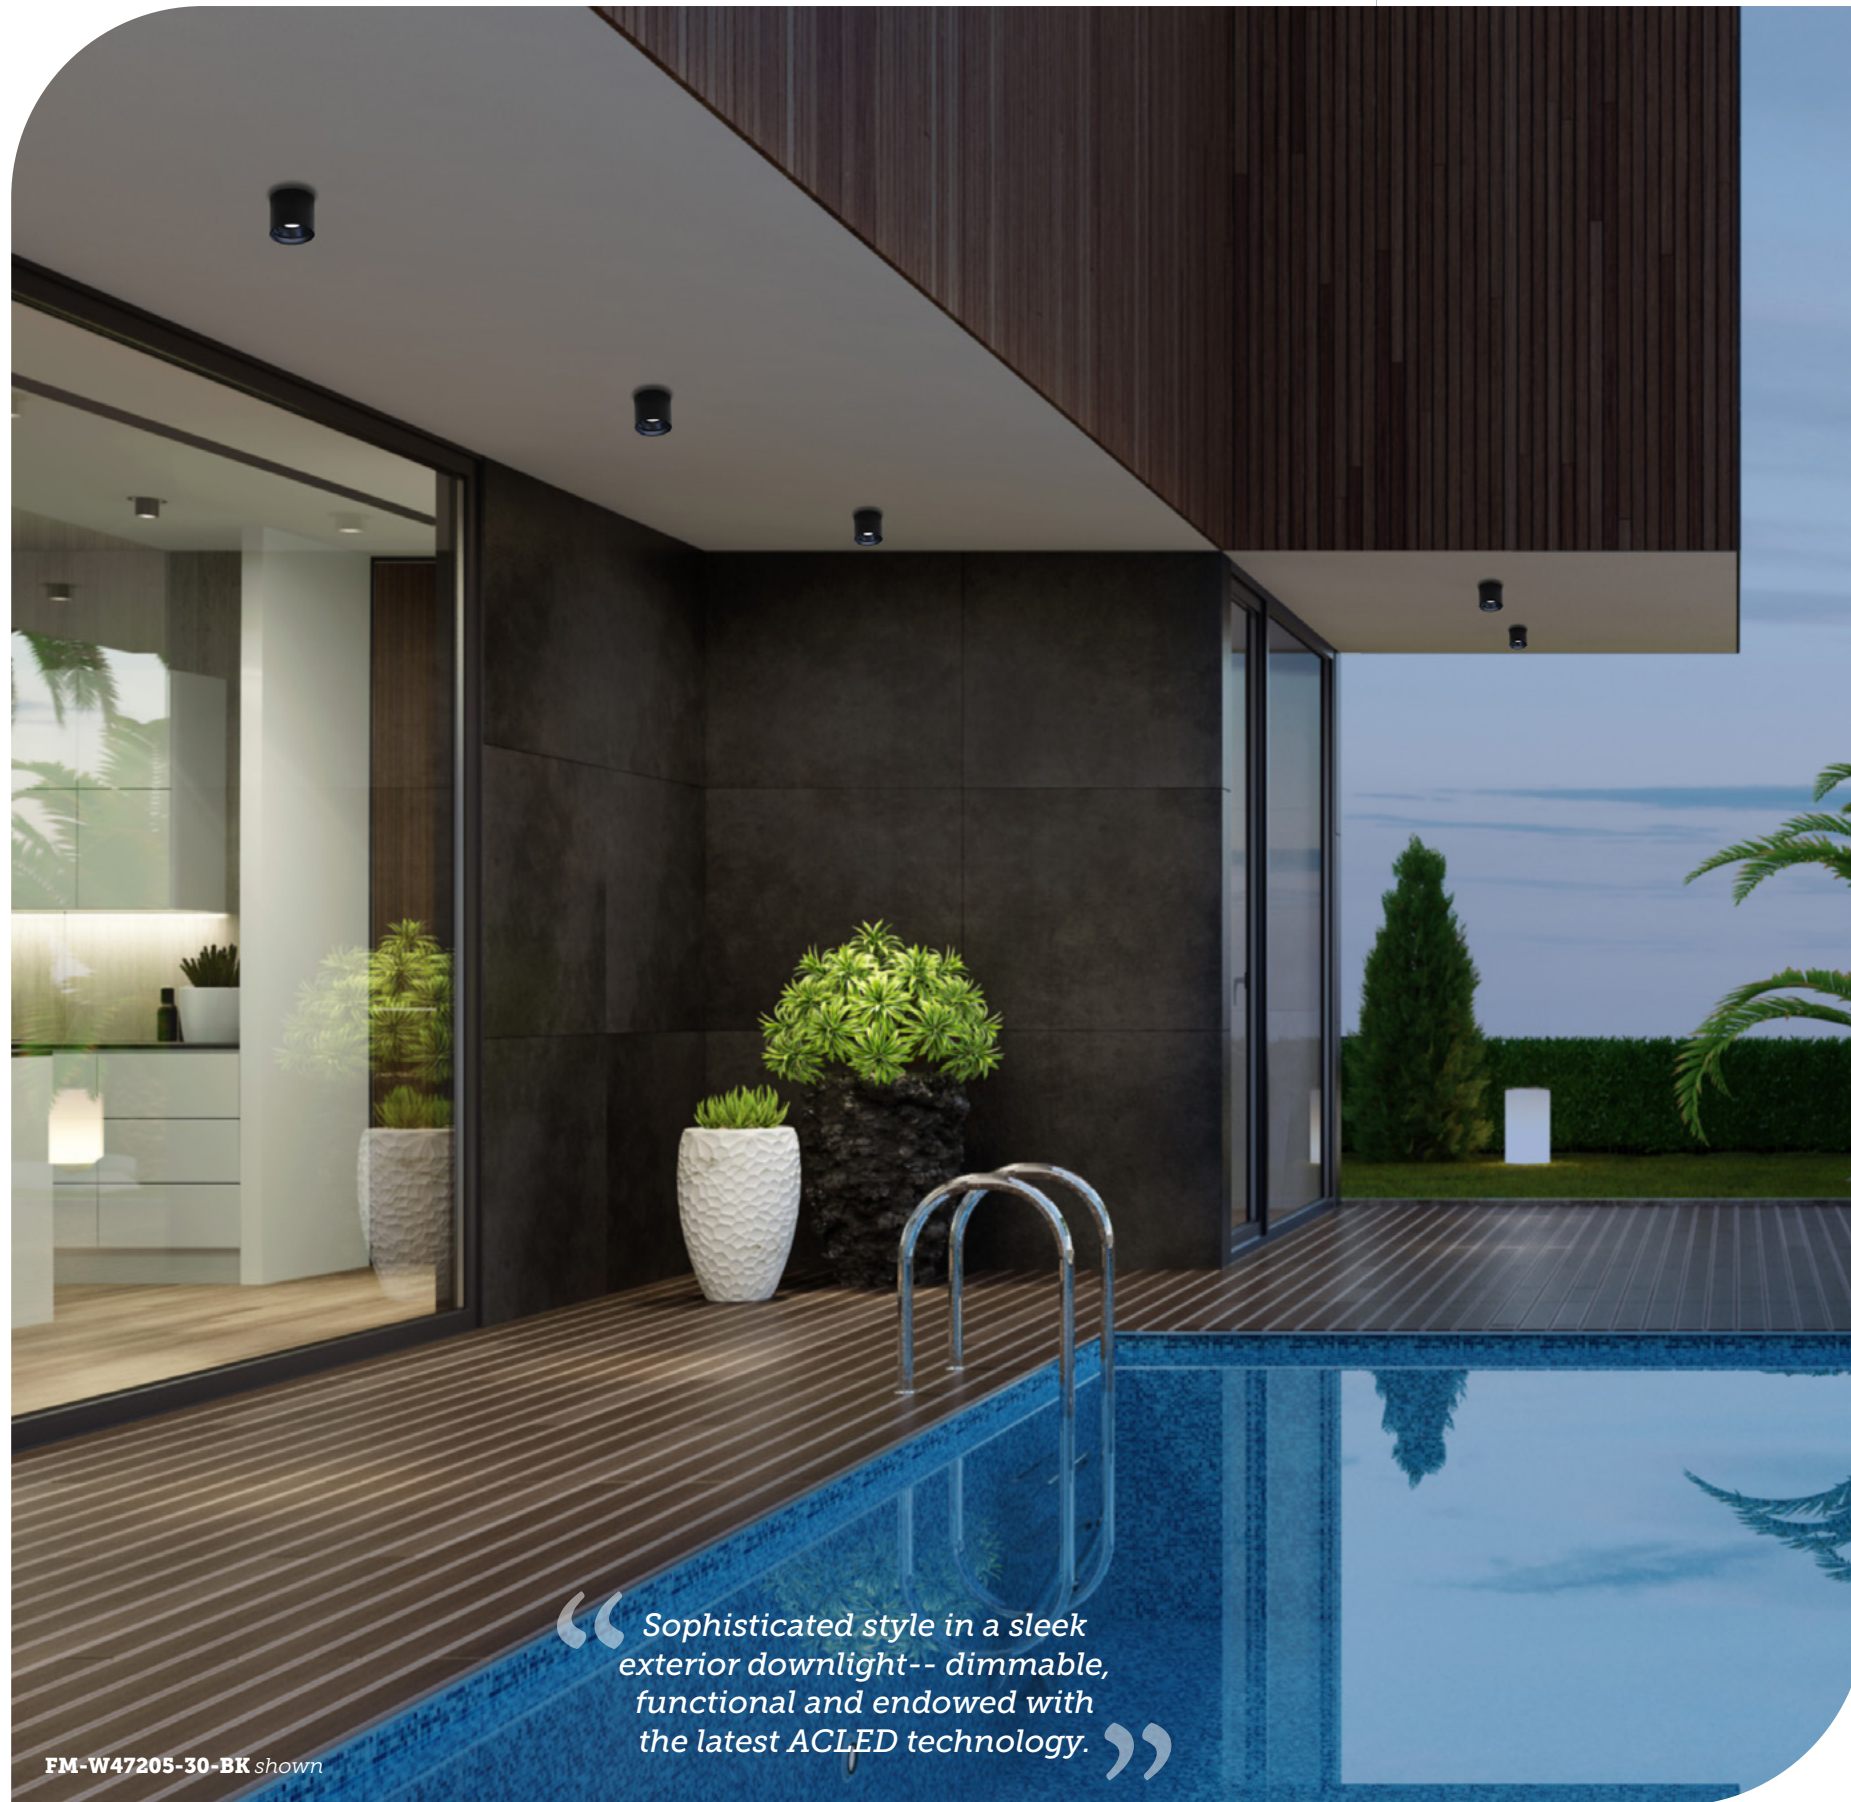


FM-W47205-30-BK shown

“Sophisticated style in a sleek exterior downlight-- dimmable, functional and endowed with the latest ACLED technology.”



FM-W47205-30-BK shown

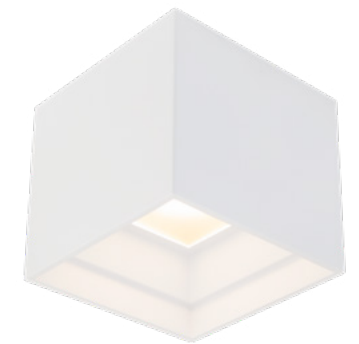

FM-W47206-30-WT shown



## 5" INTERIOR/EXTERIOR LED CEILING MOUNT

- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- ACLED driverless technology
- May be mounted on ceiling or wall



FM-W47205



FM-W47206

Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

### FM-W47205-30, FM-W47205-35, FM-W47205-40:

Size: 5" Watt: 12W  
 LED Lumens: Up to 950  
 Delivered Lumens: Up to 350

### FM-W47206-30, FM-W47206-35, FM-W47206-40:



Size: 5" Watt: 12W  
 LED Lumens: Up to 950  
 Delivered Lumens: Up to 519

### Finish



**BK:**  
Black

**WT:**  
White

Example: **FM-W47205-30-BK**



FM-W47205



FM-W47206



**FM-W45205-30-WT** shown



**FM-W45205-30-BK** shown



## 5" INTERIOR/EXTERIOR LED CEILING MOUNT

- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- Adjustable beam angle up to 40 degrees
- Rotatable multi-axis gimbal ring
- Fixture conceals a universal 120V-220V-277V driver
- May be mounted on ceiling or wall

Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V


### Finish

 **BK:**  
Black

 **WT:**  
White

Example: **FM-W45205-30-WT**

**FM-W45205-30, FM-W45205-35, FM-W45205-40:**  
 Size: 5" Watt: 9W  
 LED Lumens: Up to 1,000  
 Delivered Lumens: Up to 856

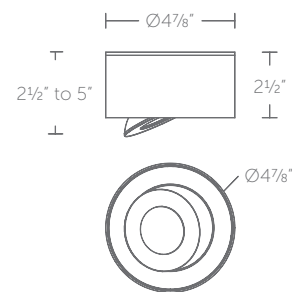

**FM-W45205**



“ Accent a barbecue or throw spot illumination on a basketball court, this adjustable spot rotates in the field with a touch of your hand. ”

**FM-W45205-30-BK** shown



FM-W33113-BK shown

“Clean lines for a stunning look.  
Modern minimalism.”



FM-W33113-BK shown



## 13" INTERIOR/EXTERIOR LED CEILING MOUNT

- Hammered glass panels on five sides
- Stainless steel textured reflector
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on ceiling or wall


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V

### Finish

**BK:**  
Black

Example: **FM-W33113-BK**

**FM-W33113:** Size: 13" Watt: 20W  
 LED Lumens: 941 Delivered Lumens: 684

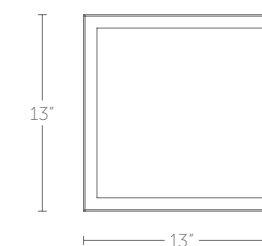

FM-W33113



See complementary pieces  
on page 288-289.



FM-W93216-BK shown



## 16" INTERIOR/EXTERIOR LED CEILING MOUNT

- Mouth blown opal glass shade
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- ACLED driverless technology



Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish



**BK:**  
Black

Example: **FM-W93216-BK**

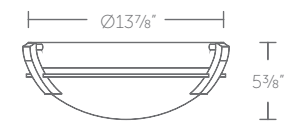

FM-W93216



“Opal glass illuminates with a custom, selectable choice of three color temperatures.”

FM-W93216-BK shown




FM-53116-BK shown

“ Fine fabrics and hardware complements.  
Soft modern elegance. ”



FM-53116-AB shown

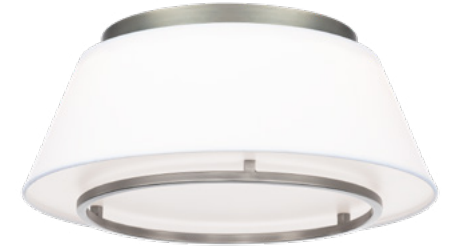

FM-53116-BN shown



FM-53116-BK shown



TITLE 24  
CALIFORNIA

## 16" LED CEILING MOUNT

- Fabric shade with etched acrylic diffuser in three coordinating fabric and hardware color combinations
- Fixture conceals a 120V driver



Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 60,000 hours  
Input: 120V

**FM-53116:** Size: 16" Watt: 15W  
LED Lumens: 948 Delivered Lumens: 759

### Finish

**AB:**  
Aged Brass


**BK:**  
Black

**BN:**  
Brushed Nickel

Example: **FM-53116-BK**




16"




FM-53116

# PARALLAX

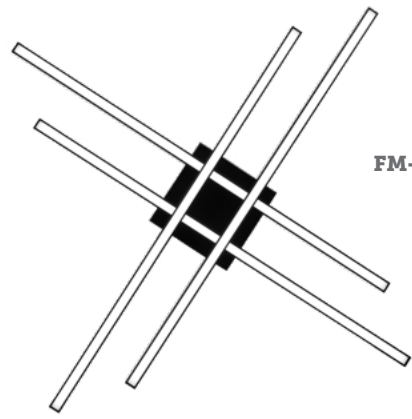

FM-73132-BK shown

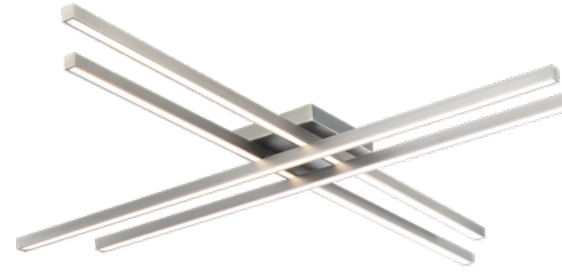

FM-73142-BN shown



## 32" & 42" LED CEILING MOUNT

- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- Thin canopy conceals a 120V driver
- May be mounted on ceiling or wall



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

**FM-73132:** Size: 32" Watt: 23W  
 LED Lumens: Up to 1,306 Delivered Lumens: Up to 918

**FM-73142:** Size: 42" Watt: Up to 35W  
 LED Lumens: Up to 2,006 Delivered Lumens: Up to 1,400

### Finish



**BK:**  
Black



**BN:**  
Brushed Nickel




**CH:**  
Chrome


Example: **FM-73132-CH**



See complementary pieces on page 128-129.

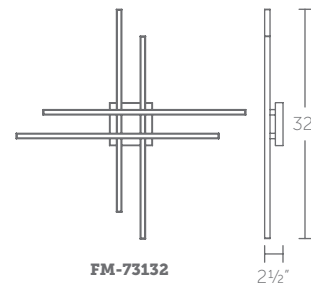

FM-73132

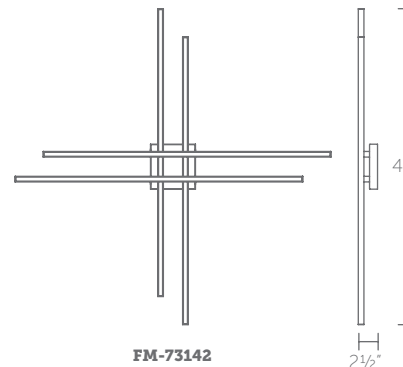

FM-73142



“ A ceiling mount or wall sconce of exaggerated proportions. Unparalleled. ”

FM-73132-CH shown





FM-67116-AB shown

“A centerpiece or classic complement.”



FM-67116-BN shown



FM-67116-AB shown



### 16" LED CEILING MOUNT

- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on ceiling or wall



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V/277V


FM-67116: Size: 16" Watt: 30W  
 LED Lumens: 2,674 Delivered Lumens: 1,904

#### Finish

**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

Example: **FM-67116-AB**



FM-67116

# TAURUS



FM-49118-BK/GO shown





## 18" LED CEILING MOUNT

- Etched acrylic shade with spin-on installation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- Thin canopy conceals a 120V driver
- May be mounted on ceiling or wall



Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 60,000 hours  
 Input: 120V

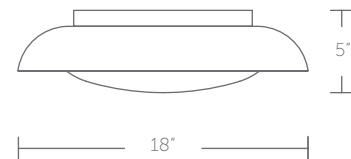

FM-49118

**FM-49118:** Size: 18" Watt: 15W  
 LED Lumens: Up to 1,174  
 Delivered Lumens: Up to 950

### Finish



**BK/GO:**  
 Black/Gold

Example: **FM-49118-BK/GO**



“Ample style and illumination.”

FM-49118-BK/GO shown



“ A timeless aesthetic. Lustrous aged brass or antiqued nickel and generous illumination for hallways and entryways. ”

FM-45012-AB shown



FM-45008-BN shown



FM-45012-AB shown



### 8" & 12" LED CEILING MOUNT

- AC LED driverless technology
- May be mounted on ceiling or wall

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

#### Finish


**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

Example: **FM-45008-AB**

**FM-45008:** Size: 8" Watt: 15W  
 LED Lumens: 873 Delivered Lumens: 449

**FM-45012:** Size: 12" Watt: 27W  
 LED Lumens: 1,845 Delivered Lumens: 1,071

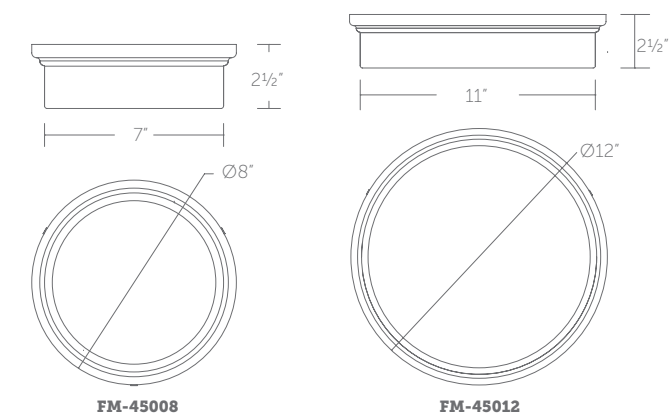



**FM-46010-BN** shown



**FM-46014-AB** shown



TITLE 24  
CALIFORNIA

## 10" & 14" LED CEILING MOUNT

- Etched opal glass shade
- ACLED driverless technology

Color Temp: 3000K  
CRI: 90  
Dimming: 100% - 10% ELV  
Rated Life: 50,000 hours  
Input: 120V



### Finish


**AB:**  
Aged Brass

**BN:**  
Brushed Nickel

Example: **FM-46014-BN**

**FM-46010:** Size: 10" Watt: 15W  
LED Lumens: 1,400 Delivered Lumens: 667

**FM-46014:** Size: 14" Watt: 30W  
LED Lumens: 2,800 Delivered Lumens: 1,522

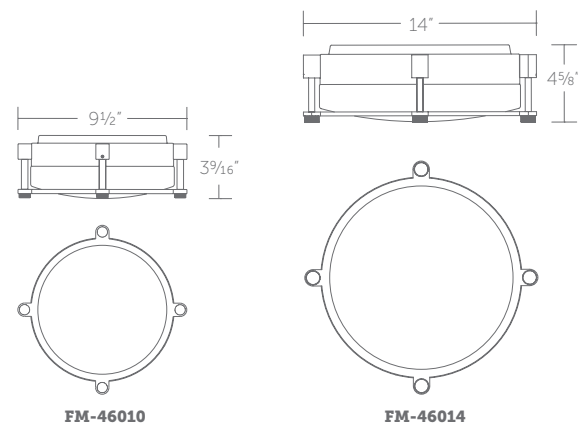

**FM-46010**

**FM-46014**



“ Modern industrial or contemporary nautical. Substantial hardware in beautiful designer finishes and ample LED illumination. ”

**FM-46014-BN** shown



# ELEKTRON

## 20" & 28" LED CEILING MOUNT

- Uniquely versatile fixture capable of transforming from pendant to ceiling mount
- Edge-lit LED with etched acrylic diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Junction box conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 36,000 hours  
 Input: 120V-277V

**FM-21720:** Size: 20" Watt: 20W  
 LED Lumens: 1,680 Delivered Lumens: 1,305

**FM-21728:** Size: 28" Watt: 30W  
 LED Lumens: 2,525 Delivered Lumens: 1,723


### Finish

- AL:** Brushed Aluminum
- BK:** Black

Example: **FM-21720-BK**



“Traveling at the speed of light.”

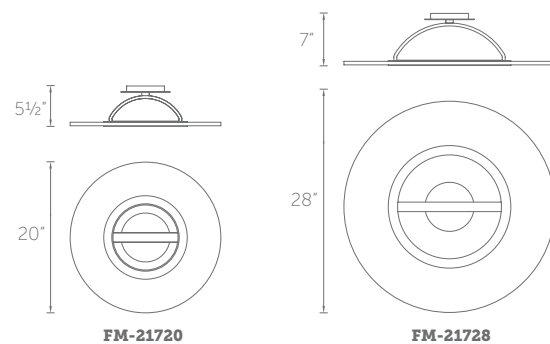

# GEOS

## 10", 15" & 22" LED CEILING MOUNT

- Edge-lit LED with light-extraction panel for even illumination
- Frosted acrylic diffuser with spin on installation
- Junction box conceals a proprietary universal 120V-220V-277V driver
- May be mounted on ceiling or wall

Color Temp: 2700K, 3000K  
 CRI: 80 (10"), 90 (15" & 22")  
 Dimming: 100% - 10% ELV  
 Rated Life: 70,000 hours (10"), 50,000 hours (15" & 22")  
 Input: 120V-277V

**FM-4610-27, FM-4610-30:** Size: 10" Watt: 12W  
 LED Lumens: Up to 1,129  
 Delivered Lumens: Up to 844

**FM-4615-27, FM-4615-30:** Size: 15" Watt: 29W  
 LED Lumens: Up to 2,355  
 Delivered Lumens: Up to 1,660

**FM-4622-27, FM-4622-30:** Size: 22" Watt: 44W  
 LED Lumens: Up to 3,785  
 Delivered Lumens: Up to 2,375


### Finish


- BR:** Brushed Brass
- TT:** Titanium
- WT:** White

Example: **FM-4622-30-WT**



“Updated in a stylish brass finish to complement the latest interior trends.”

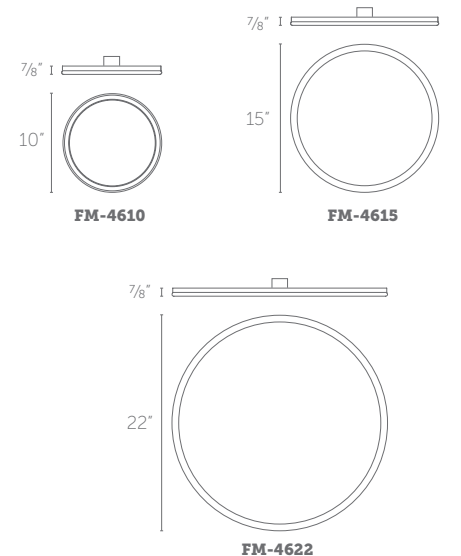

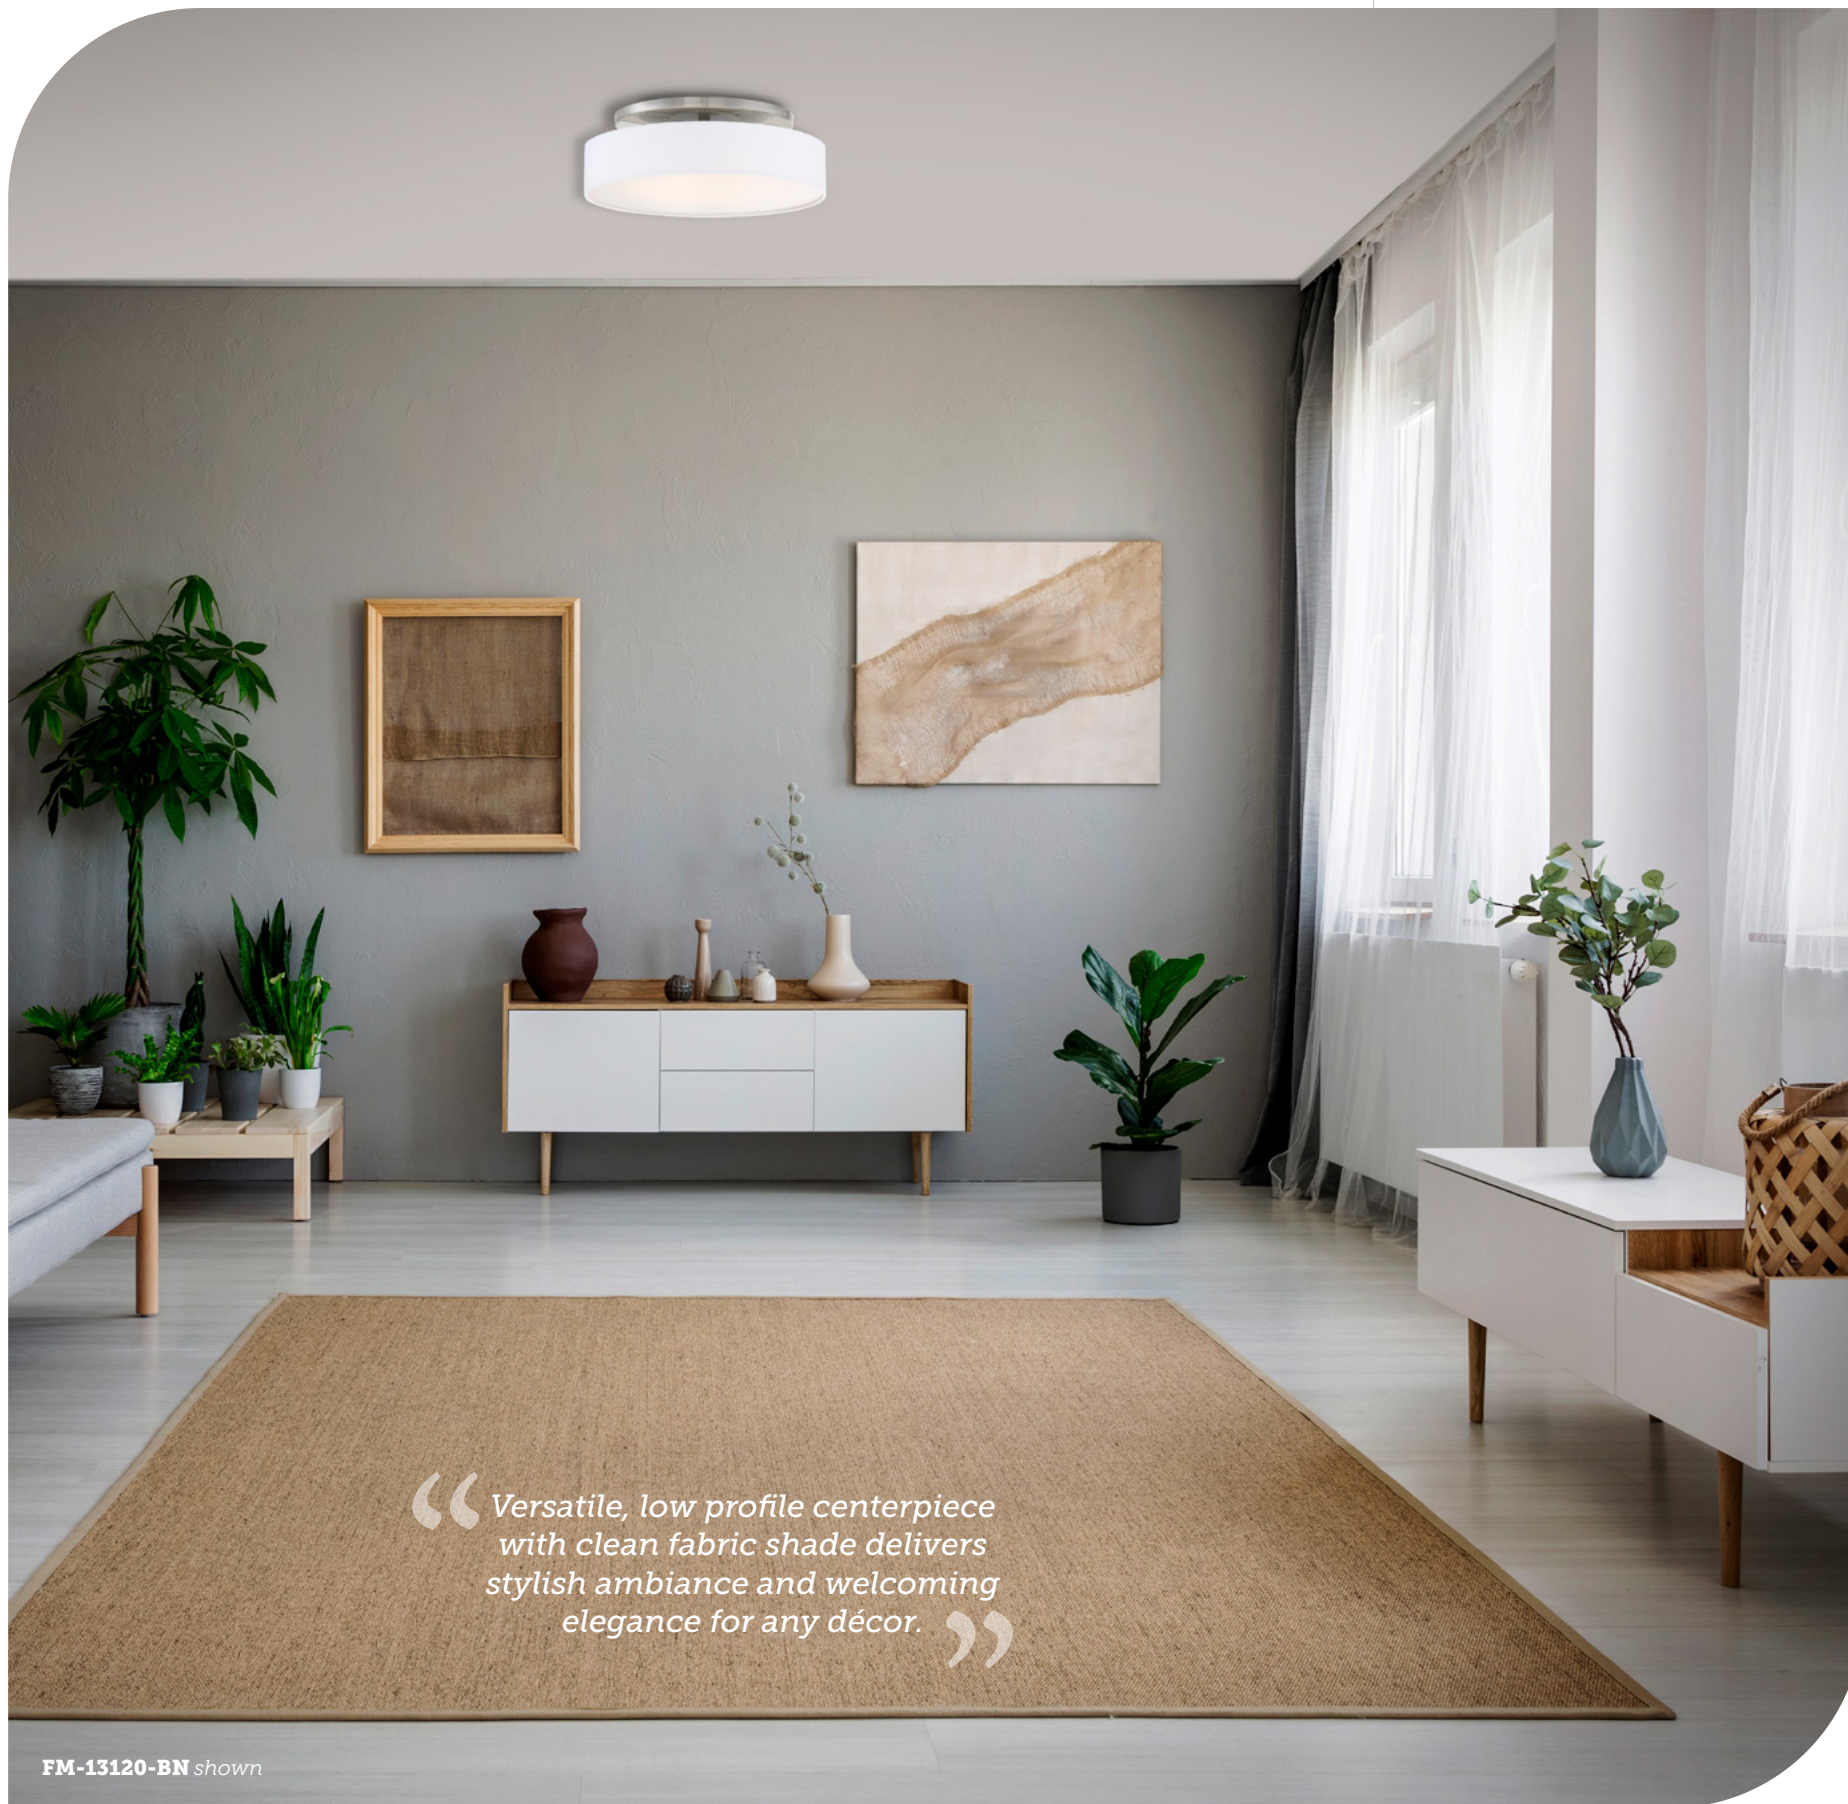

“Versatile, low profile centerpiece with clean fabric shade delivers stylish ambiance and welcoming elegance for any décor.”

FM-13120-BN shown



FM-13114-BN shown



FM-13126-BN shown



TITLE 24  
CALIFORNIA

### 14", 20" & 26" LED CEILING MOUNT

- Downlight with fabric shade
- ACLED driverless technology



Color Temp: 2700K  
CRI: 90  
Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
Rated Life: 50,000 hours  
Input: 120V

#### Finish




**BN:**  
Brushed Nickel  
Example: **FM-13120-BN**


**FM-13114:** Size: 14" Watt: 26W  
LED Lumens: 2,400 Delivered Lumens: 1,794

**FM-13120:** Size: 20" Watt: 32W  
LED Lumens: 2,800 Delivered Lumens: 2,222


**FM-13126:** Size: 26" Watt: 48W  
LED Lumens: 4,200 Delivered Lumens: 3,310



FM-13114

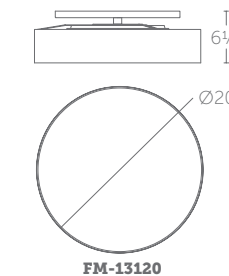

FM-13120

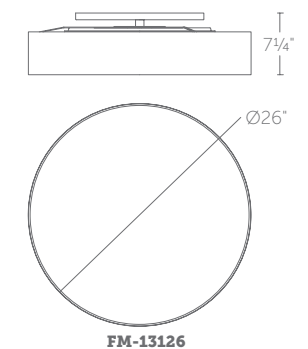

FM-13126



See complementary pieces on page 38-39.



# SLICE

## 9", 11" & 14" LED CEILING MOUNT

- Etched pressed glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on ceiling or wall

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 45,000 hours  
 Input: 120V (277V special order)

### Finish



Example: **FM-4111-27-BN**  
 For 277V special order, add an "F" before the color temperature:  
**FM-4111F-27-BN**


**FM-4109-27, FM-4109-30, FM-4109-35:**  
 Size: 16.5" Watt: 16W  
 LED Lumens: Up to 1,616  
 Delivered Lumens: Up to 880

**FM-4111-27, FM-4111-30, FM-4111-35:**  
 Size: 11" Watt: 27W  
 LED Lumens: Up to 2,625  
 Delivered Lumens: Up to 1,127

**FM-4115-27, FM-4115-30, FM-4115-35:**  
 Size: 14" Watt: 30W  
 LED Lumens: Up to 3,135  
 Delivered Lumens: Up to 1,309



“ Clean design of simple shapes with etched water-clear solid glass. ”

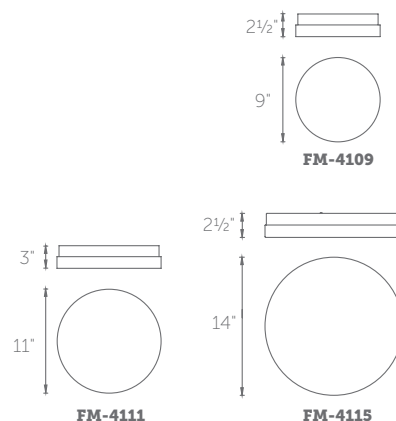

# DICE

## 6", 9", 12" & 14" LED CEILING MOUNT

- Etched pressed glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K (6", 9", 12").
- ACLED driverless technology (6", 9", 12")
- Junction box conceals a 120V transformer (14")
- May be mounted on ceiling or wall

Color Temp: 2700K/3000K/3500K (6", 9", 12"), 2700K/3000K (14")  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 45,000 hours  
 Input: 120V (277V special order)

**FM-4006-27, FM-4006-30, FM-4006-35:**  
 Size: 6" Watt: 16W  
 LED Lumens: Up to 1,471  
 Delivered Lumens: Up to 662

**FM-4009-27, FM-4009-30, FM-4009-35:**  
 Size: 9" Watt: 32W  
 LED Lumens: Up to 2,987  
 Delivered Lumens: Up to 1,294

**FM-4012-27, FM-4012-30, FM-4012-35:**  
 Size: 12" Watt: 32W  
 LED Lumens: Up to 3,128  
 Delivered Lumens: Up to 1,309

**FM-4014-27, FM-4014-30:**  
 Size: 14"x5" Watt: 31W  
 LED Lumens: Up to 1,356  
 Delivered Lumens: Up to 640


### Finish



Example: **FM-4009-30-BN**  
 For 277V special order, add an "F" before the color temperature: **FM-4006F-27-BN**



“ Versatile, clean cut luminaire with crisp angles. Optimal ambient lighting complements nearly any room design. ”

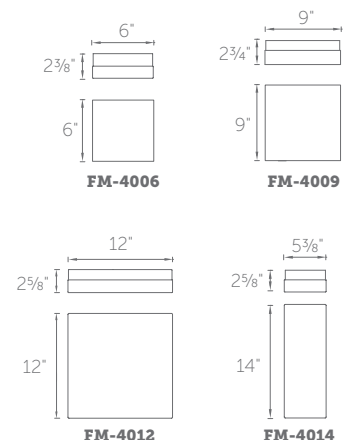



# CORSO

## 18" & 23" LED CEILING MOUNT

- Canopy conceals a proprietary universal 120V-220V-277V driver
- May be mounted on ceiling or wall

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 5% 0-10V  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**FM-33718:** Size: 18" Watt: 25W  
 LED Lumens: 1,675 Delivered Lumens: 721


**FM-33723:** Size: 23" Watt: 34W  
 LED Lumens: 2,166 Delivered Lumens: 728

### Finish

**AL:**  
 Brushed Aluminum  
 Example: **FM-33718-AL**



“Promenade of light.  
 A self illuminating  
 halo within.”

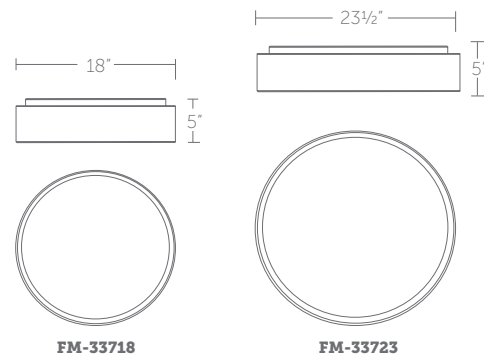

# PLANETS

## 17" LED CEILING MOUNT

- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on ceiling or wall

Color Temp: 3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 63,000 hours  
 Input: 120V-277V


**FM-16617:** Size: 17" Watt: 60W  
 LED Lumens: 5,310 Delivered Lumens: 2,355

### Finish

**BN:**  
 Brushed Nickel  
 Example: **FM-16617-BN**



“Cosmically proportioned  
 decorative ceiling-mount  
 luminaires. Illuminate  
 evenly for an out of this  
 world experience.”

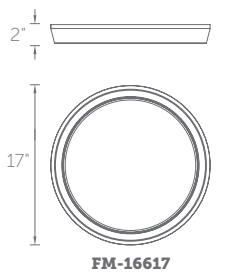





FM-W57806-30-SS shown

FM-W57809-30-SS shown

FM-W57812-30-BK shown

FM-W57815-30-BK shown

# DOT

## 6", 9", 12" & 15" INTERIOR/EXTERIOR LED CEILING MOUNT

- Injection-molded, UV-rated acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- ACLED driverless technology
- May be mounted on ceiling or wall
- 277V option available for 9", 12" & 15" sizes (special order)

Color Temp: 2700K/3000K/3500K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V (277V special order)

### Finish

**BK:**  
Black

**SS:**  
Stainless Steel

Example: **FM-W57809-30-SS**  
 For 277V special order, add an "F" before the color temperature:  
**FM-W57812F-30-SS**

**FM-W57806-27, FM-W57806-30, FM-W57806-35:**  
 Size: 6" Watt: 10W  
 LED Lumens: Up to 878 Delivered Lumens: Up to 574


**FM-W57809-27, FM-W57809-30, FM-W57809-35:**  
 Size: 9" Watt: 16W  
 LED Lumens: Up to 1,571 Delivered Lumens: Up to 1,070

**FM-W57812-27, FM-W57812-30, FM-W57812-35:**  
 Size: 12" Watt: 27W  
 LED Lumens: Up to 2,566 Delivered Lumens: Up to 1,482

**FM-W57815-27, FM-W57815-30, FM-W57815-35:**  
 Size: 15" Watt: 31W  
 LED Lumens: Up to 3,106 Delivered Lumens: Up to 1,627



“Optical diffuser amplifies the brightness on this durable waterproof outdoor flush mount.”

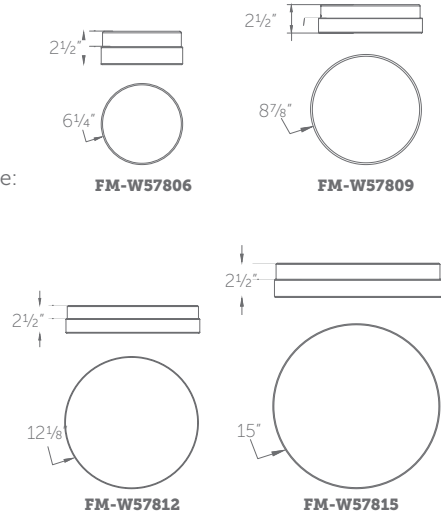

FM-W52306-WT shown

FM-W52309-WT shown

# NIVEOUS

## 6" & 9" INTERIOR/EXTERIOR LED CEILING MOUNT

- Mouth blown opal glass diffuser
- ACLED driverless technology
- May be mounted on ceiling or wall

Color Temp: 3000K (2700K/3500K special order)  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 45,000 hours  
 Input: 120V (277V special order)

**FM-W52306:** Size: 6" Watt: 10W  
 LED Lumens: 800 Delivered Lumens: 680

**FM-W52309:** Size: 9" Watt: 18W  
 LED Lumens: 1,600 Delivered Lumens: 1,428


### Finish

**WT:**  
White

Example: **FM-W52306-WT**  
 For 277V, add an "F" before the finish: **FM-W52306F-WT**  
 For 2700K add "-27"; 3500K add "-35" before the finish: **FM-W52306-35-WT**



“The perfect sphere.”

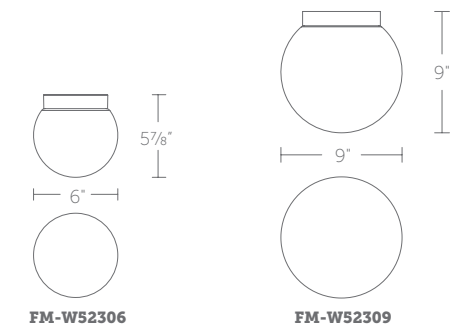

See complementary pieces on page 60-61.



# LED Outdoor

Stylish wall sconces and pendants create a beautiful fusion of indoor and outdoor into a unique living atmosphere. This seamless interior/exterior connection begins with luminaires that accent your residential and commercial architecture with highly functional and sublime aesthetics to meet your most demanding requirements . All engineered and designed for versatile adjustability, energy efficiency and long lasting durability to endure in various weather conditions.

# CORTE



WS-W15216-30-WT shown



WS-W15224-30-BK shown



## 16" & 24" LED OUTDOOR SCONCE

- Bend etched acrylic diffuser
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V


**Finish**  
 **BK:** Black  
 Example: **WS-W15216-30-BK**

### WS-W15216-30, WS-W15216-35, WS-W15216-40:

Size: 16" Watt: 17W  
 LED Lumens: Up to 1,416  
 Delivered Lumens: Up to 988

### WS-W15224-30, WS-W15224-35, WS-W15224-40:

Size: 24" Watt: 25W  
 LED Lumens: Up to 2,150  
 Delivered Lumens: Up to 1,527

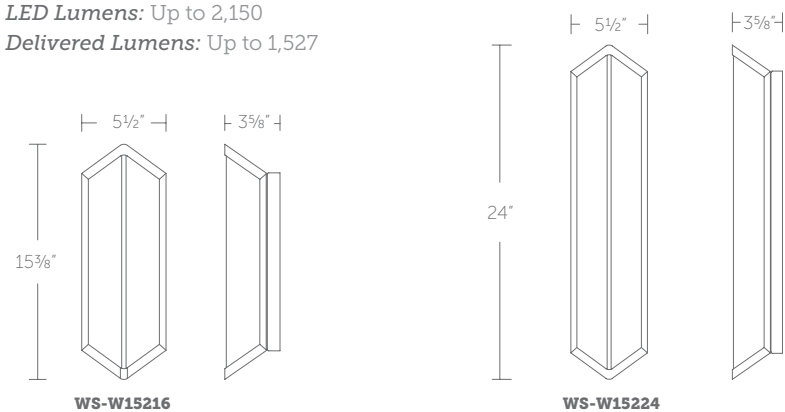

“ A sublime luminous spirit, this cutting edge wall luminaire's design and brilliant illumination adds style to your exterior. ”

WS-W15216-30-BK shown



WS-W49214-30-BK shown

“ Amplify the boldness of this two-way exterior wall luminaire with equally distributed robust illumination above on facades and below on paths. ”



WS-W49214-30-BK shown



## 14" LED OUTDOOR SCONCE

- Up and downlight illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- ACLED driverless technology
- May be mounted on wall in all orientations




Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-W49214-30, WS-W49214-35, WS-W49214-40:**  
 Size: 14" Watt: 16W  
 LED Lumens: Up to 1,535 Delivered Lumens: Up to 307

### Finish

**BK:** Black  
 Example: **WS-W49214-30-BK**

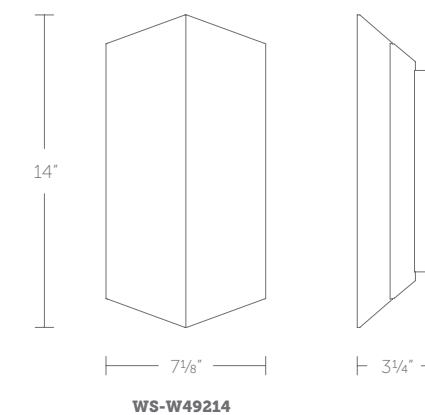

# TATE



WS-W69214-BK shown



WS-W69222-BK shown



PATENT PENDING



## 14" & 22" LED OUTDOOR SCONCE

- Etched opal glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

**WS-W69214:** Size: 14" Watt: 16W  
 LED Lumens: 1,200 Delivered Lumens: 451


**WS-W69222:** Size: 22" Watt: 32W  
 LED Lumens: 2,400 Delivered Lumens: 943

### Finish



**BK:**  
Black

Example: **WS-W69214-BK**

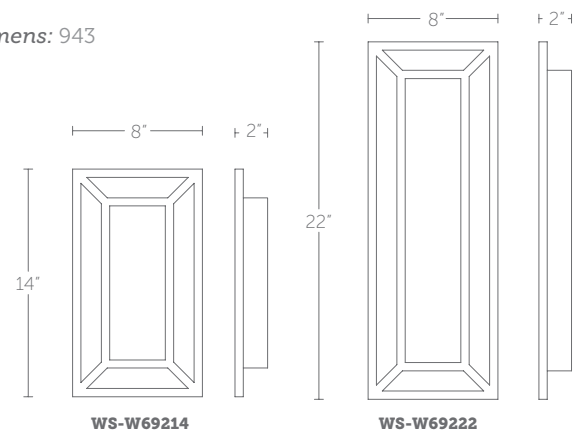

“Ornate and ethereal for your home exterior, this framework styled wall luminaire softly illuminates.”

WS-W69214-BK shown



WS-W77211-BK shown

“ Industrial style meets nautical edginess. A look and design reliable for a pragmatic and aesthetic approach to the workplace or the home. ”



WS-W77211-AL shown



WS-W77211-BK shown



## 11" LED OUTDOOR SCONCE

- Downlight with etched acrylic diffuser
- ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V


### Finish

**AL:**  
Brushed Aluminum

**BK:**  
Black


Example: **WS-W77211-BK**

**WS-W77211:** Size: 11" Watt: 17W  
 LED Lumens: 1,346 Delivered Lumens: 763

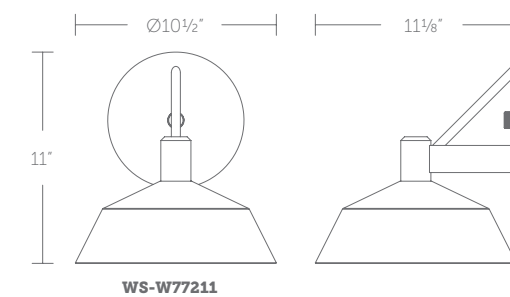




WS-W17214-BK shown

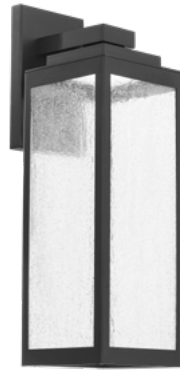

WS-W17218-BK shown



WS-W17222-BK shown



## 14", 18" & 22" LED OUTDOOR SCONCE

- Downlight with seeded clear glass diffuser
- Open bottom for ease of maintenance
- ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

**WS-W17214:** Size: 14" Watt: 16W  
 LED Lumens: 1,426 Delivered Lumens: 366

**WS-W17218:** Size: 18" Watt: 19W  
 LED Lumens: 1,741 Delivered Lumens: 490

**WS-W17222:** Size: 22" Watt: 20W  
 LED Lumens: 1,843 Delivered Lumens: 452


### Finish

**BK:**  
 Black


Example: **WS-W17218-BK**




See complementary pieces on page 284-285.



WS-W17214

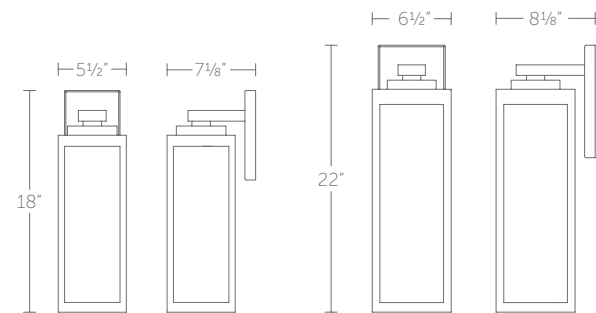

WS-W17218

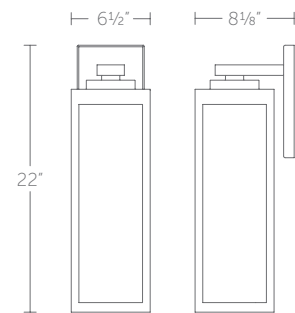

WS-W17222



“ A timeless classic lantern meets modern LED technology with a clear seeded glass lens and an open bottom for easy maintenance. ”

WS-W17218-BK shown



“ A timeless classic lantern meets modern LED technology with a clear seeded glass lens and an open bottom for easy maintenance. ”

PD-W17216-BK shown



PD-W17216-BK shown



### 16" LED OUTDOOR PENDANT

- Downlight with seeded clear glass diffuser
- Open bottom for ease of maintenance
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- ACLED driverless technology





Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

#### Finish

**BK:**  
 Black

Example: PD-W17216-BK

**PD-W17216:** Size: 16" Watt: 19W  
 LED Lumens: 1,741 Delivered Lumens: 618

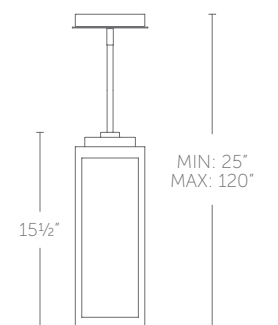

PD-W17216



See complementary pieces on page 282-283.



# BANDEAU



WS-W21110-30-BK shown



WS-W21116-30-BK shown



WS-W21122-30-BK shown



## 10", 16" & 22" LED OUTDOOR SCONCE

- Ceramic silk-screen mitered glass diffuser
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish



**BK:**  
Black

Example: **WS-W21116-30-BK**

### WS-W21110-30, WS-W21110-35, WS-W21110-40:


Size: 10" Watt: 8W LED Lumens: 600 Delivered Lumens: 192

### WS-W21116-30, WS-W21116-35, WS-W21116-40:

Size: 16" Watt: 17W LED Lumens: 1,200 Delivered Lumens: 494

### WS-W21122-30, WS-W21122-35, WS-W21122-40:

Size: 22" Watt: 20 LED Lumens: 1,600 Delivered Lumens: 734

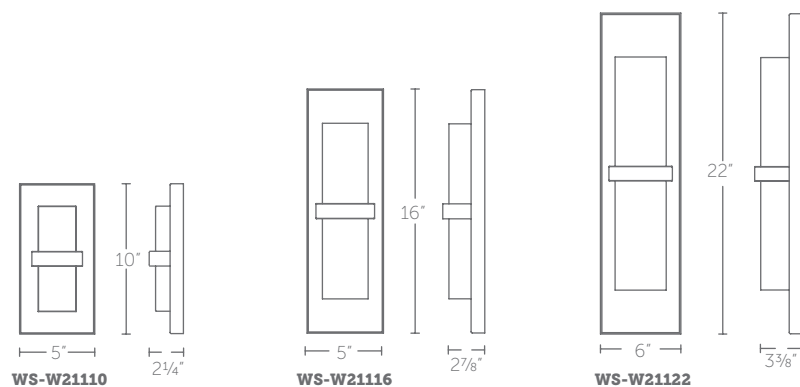

“Just the right bandwidth to stream illumination.”

WS-W21116-30-BK shown



WS-W33118-BK shown

“ Poetic justice.  
Lighting the high road. ”



WS-W33111-BK shown



WS-W33118-BK shown



WS-W33125-BK shown



## 11", 18" & 25" LED OUTDOOR SCONCE

- Hammered glass panels on four sides
- Open bottom for ease of maintenance
- Downlight illumination
- ACLED driverless technology




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-W33111:** Size: 11" Watt: 11W  
 LED Lumens: 800 Delivered Lumens: 173

**WS-W33118:** Size: 18" Watt: 16W  
 LED Lumens: 1,200 Delivered Lumens: 256

**WS-W33125:** Size: 25" Watt: 25W  
 LED Lumens: 2,000 Delivered Lumens: 347



WS-W33111


### Finish

**BK:**  
Black


Example: **WS-W33118-BK**



See complementary pieces on page 246-247.

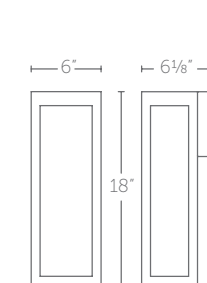

WS-W33118

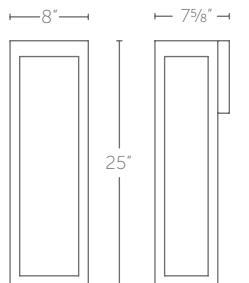

WS-W33125



WS-W35114-BK shown



WS-W35118-BK shown

# FAULKNER

## 14" & 18" LED OUTDOOR SCONCE

- Tempered glass panels with spread optics on front and sides
- Stainless steel reflector
- Open bottom for ease of maintenance
- Downlight illumination
- ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish



**BK:**  
Black

Example: **WS-W35118-BK**

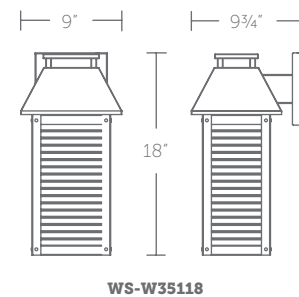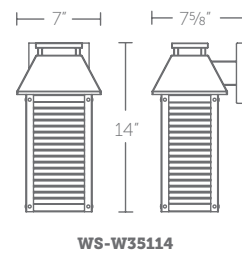

WS-W35118-BK shown

“ What makes a house a home?  
 A warm inviting aesthetic to cherish. ”



WS-W37120-BK shown

“ Be gracious. Home is where one starts. ”



WS-W37114-BK shown



WS-W37120-BK shown



## 14" & 20" LED OUTDOOR SCONCE

- Seeded clear glass diffuser on front and sides
- Stainless steel textured reflector
- Riveted swinging door with latch for ease of maintenance
- ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V


### Finish

**BK:**  
Black

Example: **WS-W37120-BK**

**WS-W37114:** Size: 14" Watt: 11W  
 LED Lumens: 800 Delivered Lumens: 196

**WS-W37120:** Size: 20" Watt: 15W  
 LED Lumens: 1,200 Delivered Lumens: 264

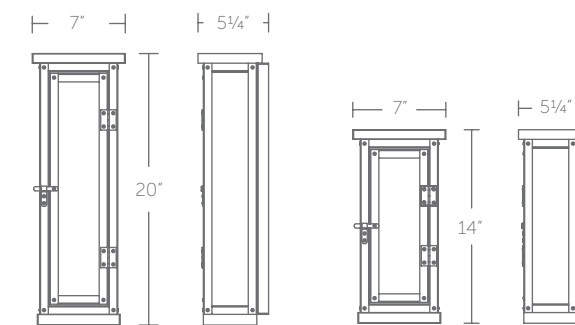

WS-W37120

WS-W37114

# FUSION



WS-W39114-BK shown



WS-W39120-BK shown



## 14" & 20" LED OUTDOOR SCONCE

- Edge lit hand crafted pressed glass feature
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V/277V

**WS-W39114:** Size: 14" Watt: 13W  
 LED Lumens: 467 Delivered Lumens: 227


**WS-W39120:** Size: 20" Watt: 21W  
 LED Lumens: 773 Delivered Lumens: 259

### Finish



**BK:**  
 Black

Example: **WS-W39114-BK**

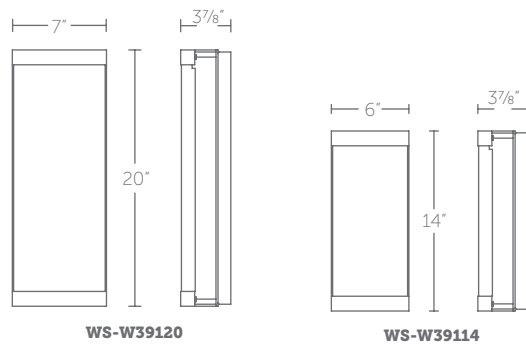

“ Depths of glacial formations.  
 Immeasurable beauty. ”

WS-W39114-BK shown



“Vintage. Industrial  
modern and coastal.”

WS-W85113-BK shown



WS-W85113-BK shown



WS-W85116-BK shown



## 13" & 16" LED OUTDOOR SCONCE

- Seeded clear glass diffuser with spin on installation
- Downlight illumination
- ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V


### Finish




Example: **WS-W85113-BK**

**WS-W85113:** Size: 13" Watt: 4W  
 LED Lumens: 215 Delivered Lumens: 174

**WS-W85116:** Size: 16" Watt: 6W  
 LED Lumens: 450 Delivered Lumens: 285

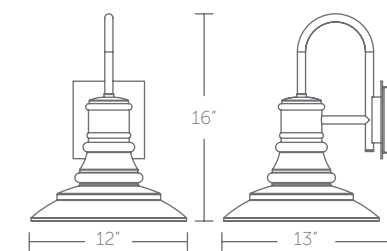

WS-W85116

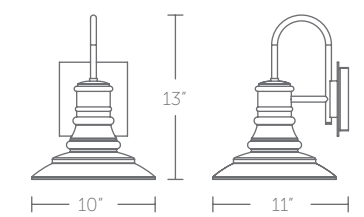

WS-W85113

# STAG



**WS-W29118-30-AL** shown



**WS-W29118-30-WT** shown



## 18" LED OUTDOOR SCENCE

- Back lit indirect illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- ACLED driverless technology
- May be mounted on wall vertically or upside down



Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V


### WS-W29118-30, WS-W29118-35, WS-W29118-40:

Size: 18" Watt: 16W  
 LED Lumens: Up to 1,424  
 Delivered Lumens: Up to 888

### Finish

- AL:** Brushed Aluminum
- BK:** Black
- WT:** White

Example: **WS-W29118-30-BK**

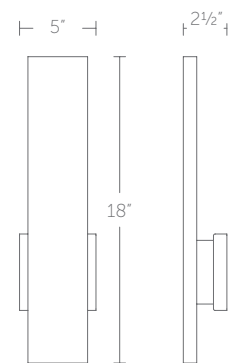

**WS-W29118**



“Majestic, keen and sharp.  
 A signature silhouette.”

**WS-W29118-30-BK** shown




**WS-W27106-30-AL** shown

“ Searching the depths.  
Illuminating all that matters. ”



**WS-W27106-30-BK** shown



**WS-W27106-30-WT** shown



## 6" LED OUTDOOR SCONCE

- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- ACLED driverless technology
- May be mounted on wall in all orientations






Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-W27106-30, WS-W27106-35, WS-W27106-40:**


Size: 6" Watt: 9W

LED Lumens: Up to 207 Delivered Lumens: Up to 130

### Finish

-  **AL:**  
Brushed Aluminum
-  **BK:**  
Black
-  **WT:**  
White

Example: **WS-W27106-30-AL**

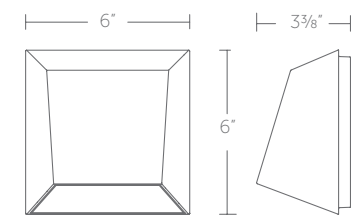

**WS-W27106**





**WS-W23105-BK** shown



**WS-W23105-AL** shown

# OSLO

## 5" LED OUTDOOR SCONCE

- Edge lit etched acrylic diffuser
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V/277V

### Finish

- AL:** Brushed Aluminum
- BK:** Black
- WT:** White

Example: **WS-W23105-WT**

**WS-W23105:** Size: 5" Watt: 5W  
 LED Lumens: 410 Delivered Lumens: 264

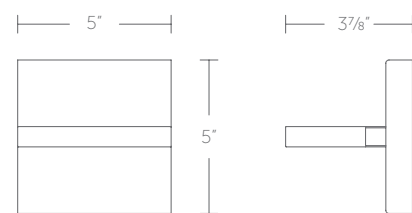

**WS-W23105**



**WS-W23105-WT** shown

“ An edge above. Technologist approved. ”



“ Functional style.  
Hang out with light.”

WS-W25106-30-BK shown



WS-W25106-30-WT shown



WS-W25106-30-AL shown



## 6" LED OUTDOOR SCONCE

- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- ACLED driverless technology
- May be mounted on wall in all orientations




Color Temp: 3000K/3500K/4000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-W25106-30, WS-W25106-35, WS-W25106-40:**  
 Size: 6" Watt: 11W  
 LED Lumens: Up to 352 Delivered Lumens: Up to 146

### Finish

- AL:** Brushed Aluminum
- BK:** Black
- WT:** White

Example: **WS-W25106-30-BK**

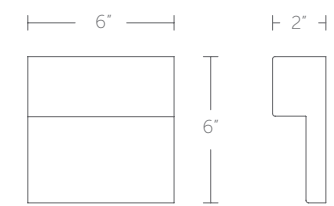

WS-W25106



PD-W63114-BK shown

# SLEEK

## 14" LED OUTDOOR PENDANT

- Clear hammered mouth blown glass diffuser
- Downlight illumination
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Spin-on round canopy with minimal hardware
- ACLED driverless technology


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV,  
 100% - 10% TRIAC  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish



**BK:**  
Black

Example: **PD-W63114-BK**

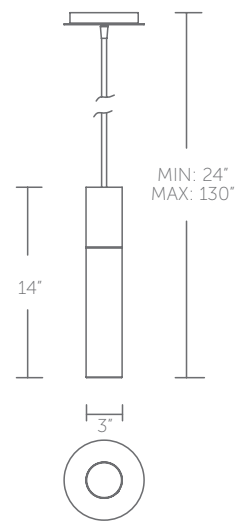

PD-W63114



“ Very Entertaining. Indoors or Out. ”

PD-W63114-BK shown



WS-W44011-BK shown

WS-W44014-BK shown

# AXEL

## 11" & 14" LED OUTDOOR SCONCE

- Ceramic silk-screen mitered glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

**WS-W44011:** Size: 11" Watt: 20W  
 LED Lumens: 1,410 Delivered Lumens: 629


**WS-W44014:** Size: 14" Watt: 30W  
 LED Lumens: 2,137 Delivered Lumens: 813

### Finish

**BK:**  
 Black  
 Example: **WS-W44014-BK**



“Clean and tight. A fixture that can be installed in any direction.”

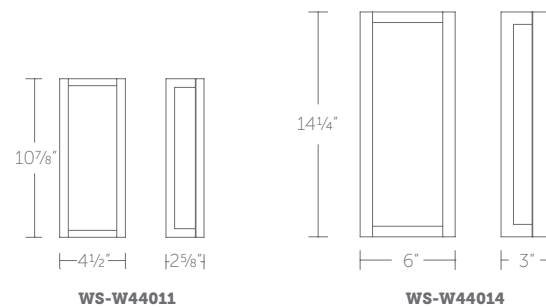

WS-W42016-BK/GO shown

WS-W42020-BK/GO shown

# NIGHTVISION

## 16" & 20" LED OUTDOOR SCONCE

- Up and downlight illumination
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-W42016:** Size: 16" Watt: 11W  
 LED Lumens: 926 Delivered Lumens: 113


**WS-W42020:** Size: 20" Watt: 16W  
 LED Lumens: 1,351 Delivered Lumens: 169

### Finish

**BK/GO:**  
 Black/Gold  
 Example: **WS-W42016-BK/GO**



“Distinctive sophistication for the great outdoors. A hint of the warmth inside.”

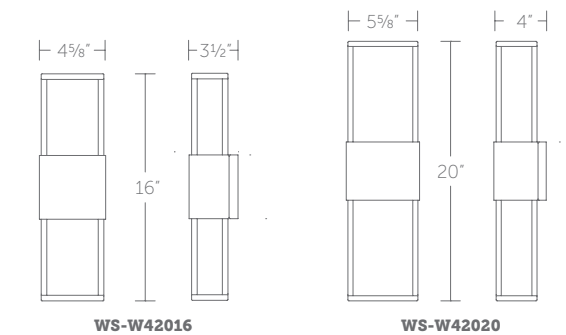



“ Modern farmhouse industrial.  
A beckoning invitation. ”

WS-W43011-BK/AB shown



WS-W43011-BK/AB shown



WS-W43015-BK/AB shown



### 11" & 15" LED OUTDOOR SCONCE

- Hammered seeded clear glass diffuser with spin on installation
- Canopy conceals a proprietary universal 120V-220V-277V driver




Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,  
 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

#### Finish


**BK/AB:**  
 Black/Aged Brass  
 Example: **WS-W43011-BK/AB**

**WS-W43011:** Size: 11" Watt: 15W  
 LED Lumens: 700 Delivered Lumens: 417

**WS-W43015:** Size: 15" Watt: 19W  
 LED Lumens: 950 Delivered Lumens: 617

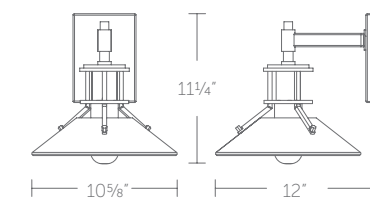

WS-W43011

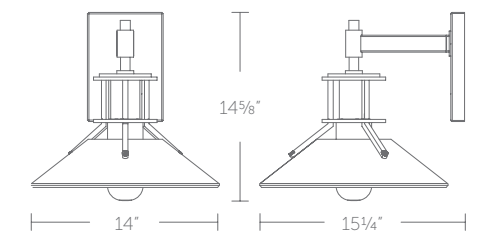

WS-W43015



# ARCHETYPE

## 18" & 24" LED OUTDOOR SCNCE

- Up and downlight illumination
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours (18")  
 60,000 hours (24")  
 Input: 120V

### Finish

**BK:**  
 Black  
 Example: **WS-W13918-BK**

**WS-W13918:** Size: 18" Watt: 16W  
 LED Lumens: 1,200 Delivered Lumens: 427


**WS-W13924:** Size: 24" Watt: 22W  
 LED Lumens: 1,600 Delivered Lumens: 760



WS-W13918



WS-W13924

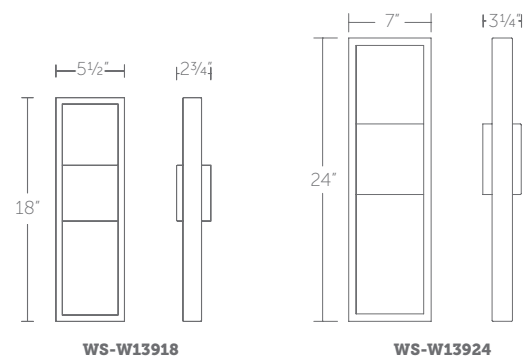

WS-W13918

WS-W13924



“ A low-profile, artful design adds a distinctive, sophisticated look in any outdoor application. ”



# ARCHETYPE

## 12", 18" & 24" LED OUTDOOR SCNCE

- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

**WS-W15912:** Size: 12" Watt: 10W  
 LED Lumens: 800 Delivered Lumens: 331

**WS-W15918:** Size: 18" Watt: 13W  
 LED Lumens: 1,000 Delivered Lumens: 435

**WS-W15924:** Size: 24" Watt: 16W  
 LED Lumens: 1,200 Delivered Lumens: 571

### Finish


**BK:**  
 Black  
 Example: **WS-W15912-BK**




WS-W15912-BK



“ Stately Modern. ”



WS-W15912

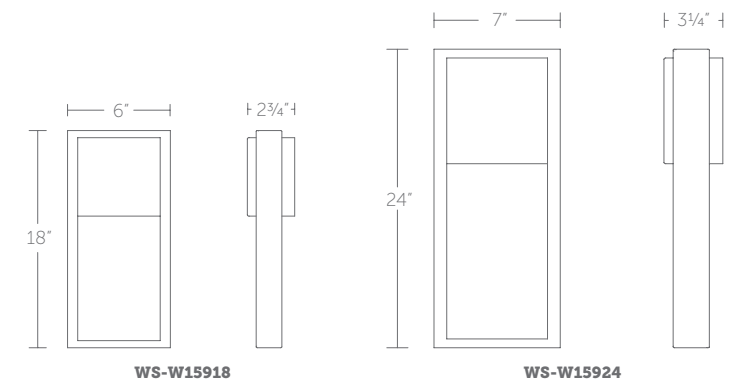

WS-W15918

WS-W15924



# ARCHETYPE

## 18" LED OUTDOOR PENDANT & 28" LED OUTDOOR POST MOUNT

- Three 12" and one 6" downrod included, additional rods available (18" Pendant)
- Mount on 3" maximum post, not included (28" Post Mount)
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish

**BK:**  
 Black  
 Example: **PD-W15918-BK**  
 Example: **PM-W15928-BK**


**PD-W15918:** Size: 18" Watt: 10W  
 LED Lumens: 800 Delivered Lumens: 379  
**PM-W15928:** Size: 28" Watt: 16W  
 LED Lumens: 1,200 Delivered Lumens: 382



PD-W15918



PM-W15928

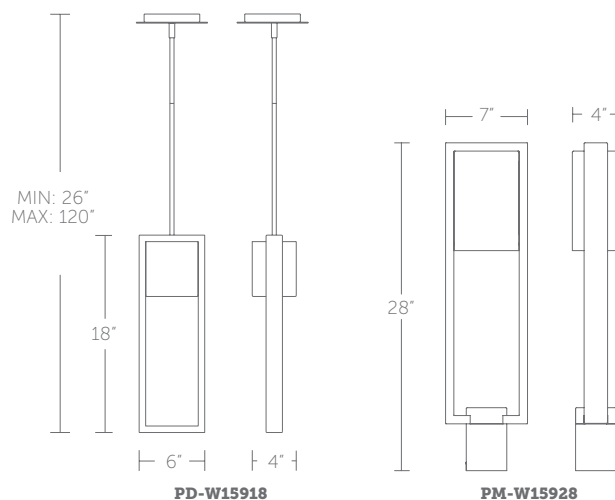

“ A low-profile, artful design adds a distinctive, sophisticated look in any outdoor application. ”



# ICON

## 14" & 20" LED OUTDOOR SCONCE

- Up and downlight illumination
- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V-277V

### Finish


**AL:**  
 Brushed Aluminum  
**BK:**  
 Black  
**BZ:**  
 Bronze

**WS-W54614:** Size: 14" Watt: 11W  
 LED Lumens: 845 Delivered Lumens: 458  
**WS-W54620:** Size: 20" Watt: 11W  
 LED Lumens: 847 Delivered Lumens: 478



“ Like a simple reference to something greater, the up and down lights accentuate linear architectural forms. ”

Example: **WS-W54614-BZ**

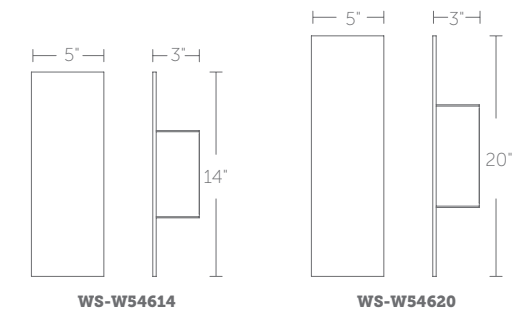



WS-W36610-AL shown

WS-W36610-BK shown

WS-W36614-BZ shown

# CALIBER

## 10" & 14" LED OUTDOOR SCONCE

- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 72,000 hours  
 Input: 120V-277V

**Finish**

**AL:**  
Brushed Aluminum


**BK:**  
Black

**BZ:**  
Bronze

Example: **WS-W36614-AL**

**WS-W36610:** Light: One Direction  
 Size: 10" Watt: 11W  
 LED Lumens: 735 Delivered Lumens: 560

**WS-W36614:** Light: Up & Down Light  
 Size: 14" Watt: 21W  
 LED Lumens: 1,500 Delivered Lumens: 1,140

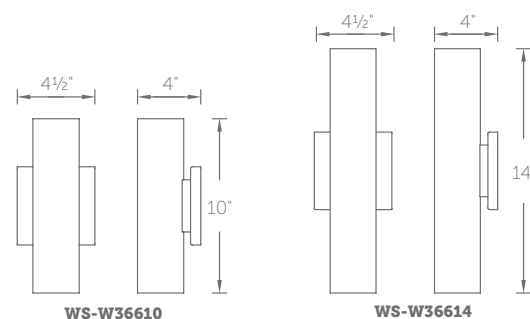

“ Light projection tuned with precision. ”



PD-W36610-BK shown

PD-W36610-WT shown

PD-W36610-BZ shown

PD-W36610-AL shown

# CALIBER

## 10" LED OUTDOOR MINI PENDANT

- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Fixture conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 75,000 hours  
 Input: 120V-277V

**Finish**

**AL:**  
Brushed Aluminum

**BK:**  
Black

**BZ:**  
Bronze


**WT:**  
White

Example: **PD-W36610-BK**

**PD-W36610:** Size: 10" Watt: 12W  
 LED Lumens: 799 Delivered Lumens: 508



“ Clean, modern style for any space. ”

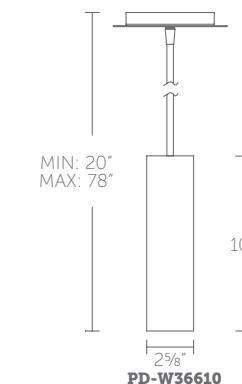





WS-W15708-BZ shown



WS-W15710-BK shown



## 8" & 10" LED OUTDOOR SCONCE

• ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V


### Finish



Example: **WS-W15708-BZ**

**WS-W15708:** Size: 8" Watt: 12W  
 LED Lumens: 750 Delivered Lumens: 315

**WS-W15710:** Size: 10" Watt: 15W  
 LED Lumens: 1,200 Delivered Lumens: 560

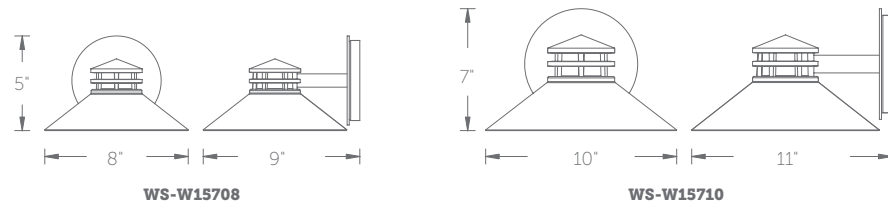

“ Steamworks inspired contemporary approach to a traditional lantern. ”

WS-W15710-BK shown



# MOD

## 6" LED OUTDOOR SCONCE

- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations




“Modernistic and always in fashion. A clean asymmetrical down light.”

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 70,000 hours  
 Input: 120V-277V


### Finish

- BK:** Black
- BZ:** Bronze
- GH:** Graphite
- WT:** White

Example: **WS-W65607-BZ**

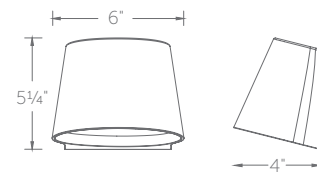

WS-W65607

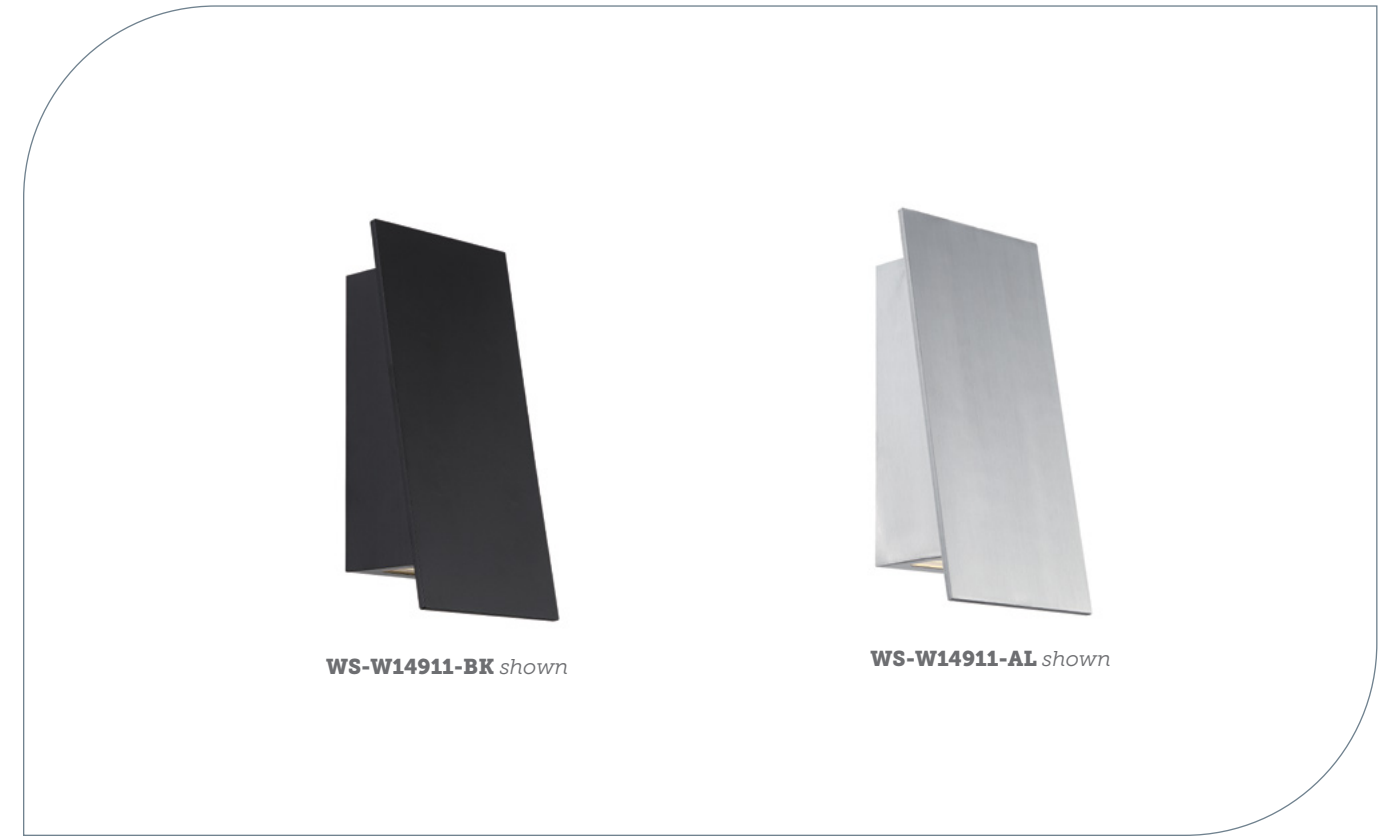

# SLANT

## 11" LED OUTDOOR SCONCE

- ACLED driverless technology
- May be mounted on wall in all orientations



“Cleverly designed, minimalistic lighting.”


Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V

### Finish


- AL:** Brushed Aluminum
- BK:** Black

Example: **WS-W14911-BK**

**WS-W14911:** Size: 11" Watt: 7W  
 LED Lumens: 441 Delivered Lumens: 353



WS-W14911

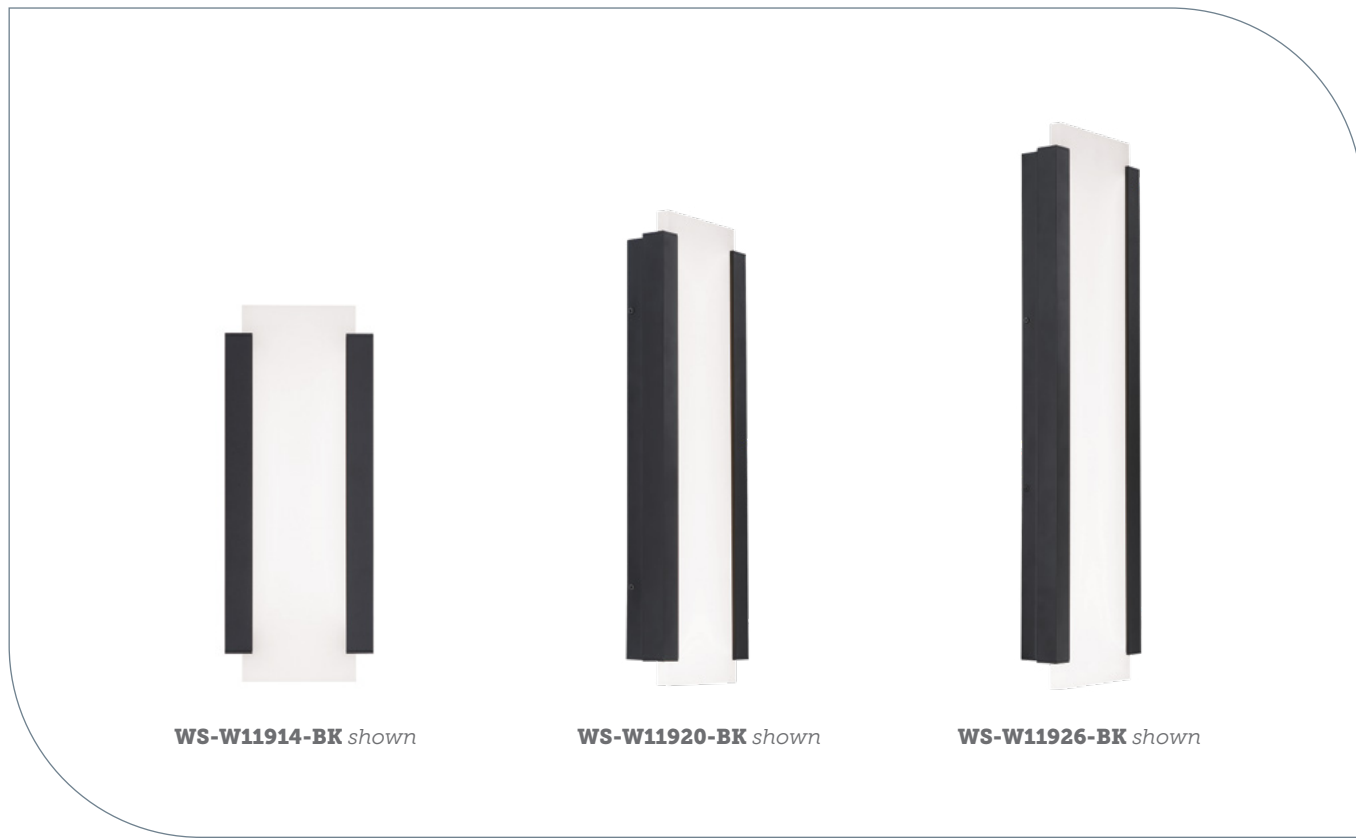

WS-W11914-BK shown

WS-W11920-BK shown

WS-W11926-BK shown

# FICTION

## 14", 20" & 26" LED OUTDOOR SCONCE

- Frontlight with etched acrylic diffuser
- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V, 100% - 10% TRIAC  
 Rated Life: 50,000 hours  
 Input: 120V-277V

**WS-W11914:** Size: 14" Watt: 9W  
 LED Lumens: 788 Delivered Lumens: 445

**WS-W11920:** Size: 20" Watt: 15W  
 LED Lumens: 1,666 Delivered Lumens: 758


**WS-W11926:** Size: 26" Watt: 20W  
 LED Lumens: 2,855 Delivered Lumens: 1,132

### Finish



**BK:**  
Black

Example: **WS-W11914-BK**

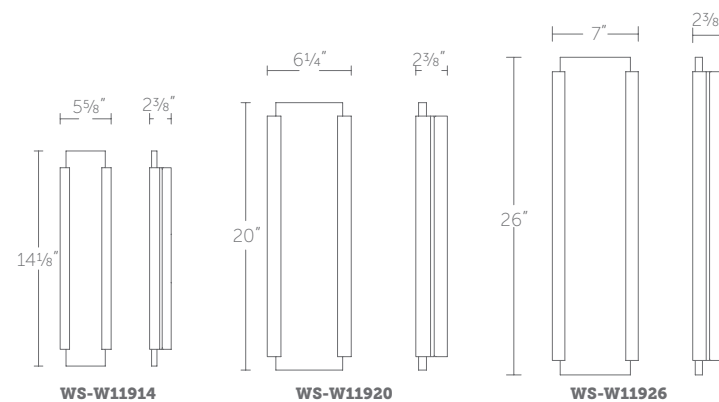

“ Modern elegance in a powerful, iconic design. ”



WS-W47809-BK shown

WS-W47814-SS shown

WS-W47820-BK shown

# CASE

## 9", 14" & 20" LED OUTDOOR SCONCE

- Frontlight with etched acrylic diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 81,000 hours  
 Input: 120V (277V Special Order)

**WS-W47809:** Size: 9" Watt: 13W  
 LED Lumens: 1,040 Delivered Lumens: 411

**WS-W47814:** Size: 14" Watt: 22W  
 LED Lumens: 1,644 Delivered Lumens: 885

**WS-W47820:** Size: 20" Watt: 34W  
 LED Lumens: 2,560 Delivered Lumens: 1,034



### Finish




**BK:**  
Black



**SS:**  
Stainless Steel

Example: **WS-W47809-SS**  
 For 277V special order, add an "F" before the finish:  
**WS-W47814F-BK**

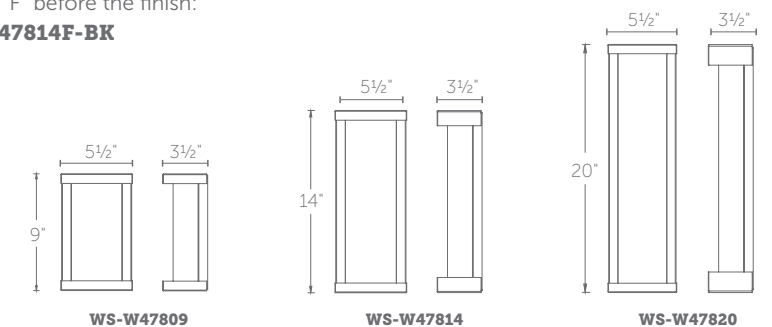

“ Clean, simple form with weather-resistant black or durable stainless steel. Mount it vertically or horizontally. ”



# BLOCK

## 6" & 8" LED OUTDOOR SCONCE

- Die-cast glass diffuser
- Fixture conceals a proprietary universal 120V-220V-277V driver
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V  
 Rated Life: 50,000 hours  
 Input: 120V-277V

### Finish

- AL:** Brushed Aluminum
- BK:** Black
- BZ:** Bronze



Example: **WS-W61808-AL**

**WS-W61806:** Light: One Direction  
 Size: 6" Watt: 9W  
 LED Lumens: 615 Delivered Lumens: 540

**WS-W61808:** Light: Up & Down Light  
 Size: 8" Watt: 15W  
 LED Lumens: 947 Delivered Lumens: 773



“Eye-catching cast glass on a clean block design.”

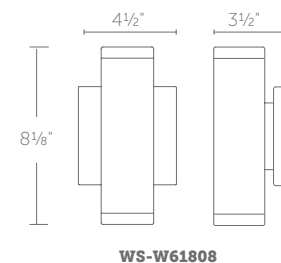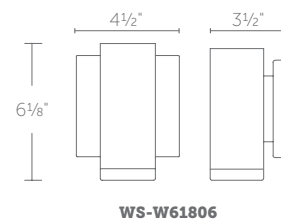

# LATITUDE

## 10", 14" & 20" LED OUTDOOR SCONCE

- Frontlight with opal glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V (277V special order)

### Finish

- BK:** Black
- BZ:** Bronze

Example: **WS-W52610-BK**  
 For 277V, add an "F" before the finish: **WS-W52620F-BK**



**WS-W52610:** Size: 10" Watt: 12W  
 LED Lumens: 765 Delivered Lumens: 415

**WS-W52614:** Size: 14" Watt: 18W  
 LED Lumens: 1,255 Delivered Lumens: 735

**WS-W52620:** Size: 20" Watt: 19W  
 LED Lumens: 1,220 Delivered Lumens: 790



“Classic architectural lighting form offered in complementary sizes.”

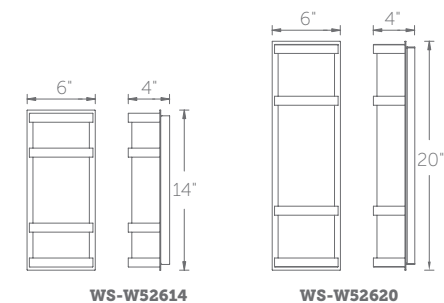

# CHAMBER



“ Bold Mid-Century Modern look with intersecting aluminum frames and cutting-edge LED light. ”

WS-W48620-BZ shown



WS-W48616-BK shown



WS-W48625-BZ shown



## 16", 20" & 25" LED OUTDOOR SCONCE

• ACLED driverless technology



Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V (277V special order)

### Finish

**BK:**  
Black


**BZ:**  
Bronze

Example: **WS-W48616-BK**  
 For 277V, add an "F" before the finish: **WS-W48616F-BK**


**WS-W48616:** Size: 16" Watt: 12W  
 LED Lumens: 1,000 Delivered Lumens: 255

**WS-W48620:** Size: 20" Watt: 18W  
 LED Lumens: 1,600 Delivered Lumens: 519


**WS-W48625:** Size: 25" Watt: 22W  
 LED Lumens: 1,800 Delivered Lumens: 605

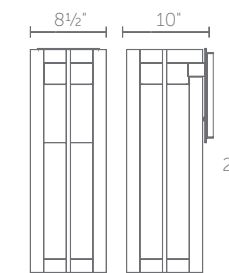

WS-W48625



WS-W48620



WS-W48616



# CHAMBER

## 16" LED OUTDOOR PENDANT & 20" LED OUTDOOR POST MOUNT

- Three 12" and one 6" downrods included for customized length (16" Pendant)
- May be mounted on a sloped ceiling (16" Pendant)
- Mounts on a 3" maximum diameter post, not included (20" Post Mount)

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 50,000 hours  
 Input: 120V (277V special order)

### Finish

- BK:** Black
- BZ:** Bronze

Example: **PD-W48616-BK**  
 Example: **PM-W48620-BZ**  
 For 277V, add an "F" before the finish: **PD-W48616F-BK**


**PD-W48616:** Size: 16" Watt: 12W  
 LED Lumens: 1,000 Delivered Lumens: 372  
**PM-W48620:** Size: 20" Watt: 18W  
 LED Lumens: 1,600 Delivered Lumens: 634



PD-W48616



PM-W48620

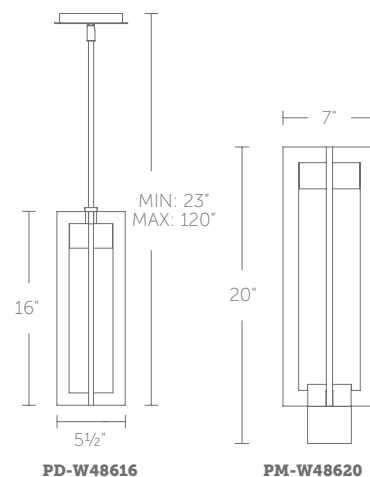

“ *Bold Mid-Century Modern look with intersecting aluminum frames and cutting-edge LED light.* ”



# OBERON

## 14", 20" & 26" LED OUTDOOR SCONCE

- Frontlight with bend opal glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V (277V special order)

### Finish

- BK:** Black

Example: **WS-W45714-BK**  
 For 277V, add an "F" before the finish: **WS-W45720F-BK**


**WS-W45714:** Size: 14" Watt: 20W  
 LED Lumens: 1,865 Delivered Lumens: 685

**WS-W45720:** Size: 20" Watt: 20W  
 LED Lumens: 1,900 Delivered Lumens: 745

**WS-W45726:** Size: 26" Watt: 35W  
 LED Lumens: 3,273 Delivered Lumens: 1,026



“ *A timeless contemporary guardian.* ”

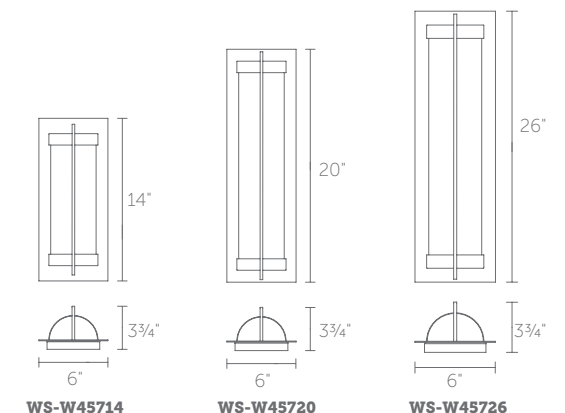



WS-W41716-BZ shown

WS-W41722-BZ shown

# SPA

## 16" & 22" LED OUTDOOR SCONCE

- Downlight with hand poured art glass
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V


### Finish

**BZ:**  
 Bronze  
 Example: **WS-W41716-BZ**

**WS-W41716:** Size: 16" Watt: 13W  
 LED Lumens: 375 Delivered Lumens: 185  
**WS-W41722:** Size: 22" Watt: 13W  
 LED Lumens: 365 Delivered Lumens: 180



“Dazzling. Shimmering.  
 Sparkle of light.”

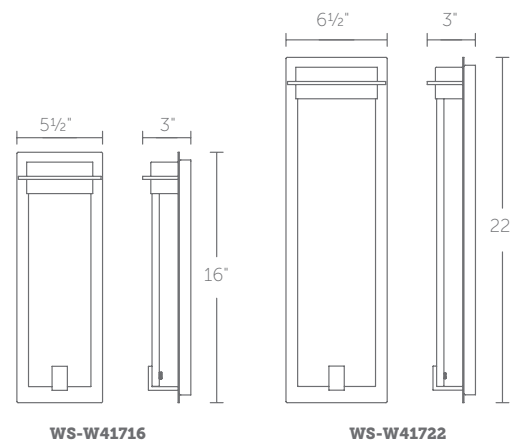

WS-W5312-BZ shown

WS-W5318-BZ shown

# TAO

## 12" & 18" LED OUTDOOR SCONCE

- Silver crystal glass window
- Front and downlight illumination
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 80,000 hours  
 Input: 120V (277V special order)


### Finish

**BZ:**  
 Bronze  
 Example: **WS-W5318-BZ**  
 For 277V, add an "F" before the finish: **WS-W5318F-BZ**

**WS-W5312:** Size: 12" Watt: 11W  
 LED Lumens: 830 Delivered Lumens: 220  
**WS-W5318:** Size: 18" Watt: 15W  
 LED Lumens: 1,218 Delivered Lumens: 250



“Architecturally  
 harmonious form.”

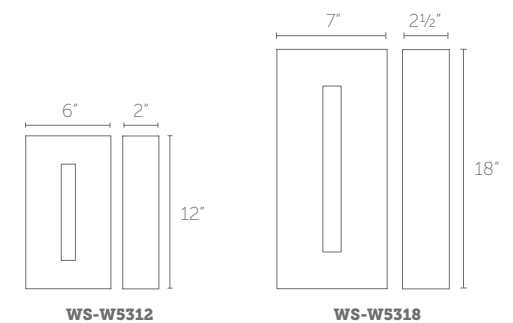



WS-W24509-BZ shown



WS-W24513-BK shown

# STEAMPUNK

## 9" & 13" LED OUTDOOR SCONCE

- Downlight with mouth blown hammered glass diffuser
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V (277V special order)

### Finish

**BK:**  
Black

**BZ:**  
Bronze


Example: **WS-W24513-BK**  
 For 277V special order, add an "F"  
 before the finish: **WS-W24513F-BK**

**WS-W24509:** Size: 9" Watt: 10W  
 LED Lumens: 624 Delivered Lumens: 365


**WS-W24513:** Size: 13" Watt: 10W  
 LED Lumens: 657 Delivered Lumens: 440




“Vintage industrial.”



WS-W24509



WS-W24513

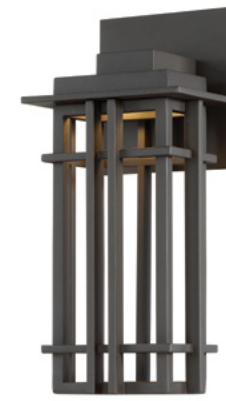

WS-W26712-BZ shown



WS-W26716-BZ shown

# NEST

## 12" & 16" LED OUTDOOR SCONCE

- Downlight illumination with extruded aluminum louvers create a dramatic pattern of light
- ACLED driverless technology

Color Temp: 3000K  
 CRI: 90  
 Dimming: 100% - 10% ELV  
 Rated Life: 54,000 hours  
 Input: 120V

### Finish

**BZ:**  
Bronze


Example: **WS-W26712-BZ**

**WS-W26712:** Size: 12" Watt: 9W  
 LED Lumens: 208 Delivered Lumens: 165


**WS-W26716:** Size: 16" Watt: 13W  
 LED Lumens: 366 Delivered Lumens: 290



“A harmonious blend of modern with arts & crafts.”



WS-W26712



WS-W26716



## A

ACTION..... 113  
 AMELIA ..... 82-83  
 AMHERST..... 282-283, 284-285  
 ARCHETYPE ..... 312-314  
 ARNE ..... 218  
 ARTEMIS ..... 108  
 ATLANTIS ..... 300-301  
 ATLAS ..... 40-41  
 AXEL ..... 308

## B

BALANCE ..... 304-305  
 BANDEAU ..... 286-287  
 BANDED ..... 114-115  
 BISTRO ..... 50-51  
 BLAKE ..... 178-179  
 BLISS ..... 156-157  
 BLOCK ..... 324  
 BLOK ..... 198  
 BOLLA ..... 100-101  
 BOXI ..... 186-187  
 BRADBURY ..... 248-249  
 BRANWEN ..... 98-99  
 BRINK ..... 154-155

## C

CALIBER ..... 316-317  
 CAMELOT ..... 176-177  
 CASE ..... 323  
 CHAMBER ..... 326-327, 328  
 CHANDRA ..... 86-87, 88-89  
 CHAUCER ..... 240-241  
 CHELSEA ..... 220-221  
 CHRYSALIS ..... 92-93  
 CLARE ..... 194-195  
 COCHERE ..... 20-21  
 COLLETTE ..... 172-173  
 COLTRANE ..... 188-189  
 CONSTANTINE ..... 238-239  
 CORBUSIER ..... 203  
 CORNICE ..... 170-171  
 CORSO ..... 53, 268  
 CORTE ..... 274-275  
 CRATER ..... 116

## D

DARCY ..... 148  
 DICE ..... 267  
 DIVERGENCE ..... 58-59  
 DRAKE ..... 192-193  
 DOT ..... 270  
 DOWNTOWN ..... 242-243  
 DUET ..... 174-175

## E

E=MC<sup>2</sup> ..... 76  
 ECHO ..... 94-95  
 EERO ..... 219  
 EFFERVESCENT ..... 34-35  
 ELEKTRON ..... 262  
 ELEMENTUM ..... 80, 153  
 ELIOT ..... 292-293

ELLINGTON ..... 104-105  
 ESCAPADE ..... 4-5  
 ESPRIT ..... 149  
 ETERNAL ..... 42-43

## F

FALLON ..... 120-121  
 FAULKNER ..... 290-291  
 FICTION ..... 322  
 FITZGERALD ..... 184-185  
 FLARE ..... 79  
 FLIP ..... 222  
 FRAME ..... 64  
 FUSION ..... 294-295

## G

GEOS ..... 263  
 GRISHAM ..... 210-211

## H

HAILEY ..... 250-251  
 HAWTHORNE ..... 246-247, 288-289  
 HEMMINGWAY ..... 230  
 HOUDINI ..... 68  
 HUDSON ..... 231

## I

ICON ..... 315  
 ILLUSION ..... 73  
 INTERLACE (PD) ..... 70-71, 102-103  
 INTERLACE (WS) ..... 162

## J

JASMINE ..... 134-135  
 JULIET ..... 146-147

## K

KENT ..... 227  
 KEPLER ..... 208-209  
 KONE ..... 110-111

## L

LASSO ..... 236-237  
 LAUREL ..... 106-107  
 LATITUDE ..... 325  
 LAYNE ..... 180-181  
 LEVEL ..... 77, 158  
 LINE ..... 74-75, 163  
 LOCKE ..... 142-143  
 LOLLI ..... 117  
 LOOPHOLE ..... 72  
 LUNE ..... 46-47, 48-49, 224-225

## M

MAMBA ..... 16-17  
 MANHATTAN (FM) ..... 264-265  
 MANHATTAN (PD) ..... 38-39

MANHATTAN (WS) ..... 190-191  
 MARQUES (FM) ..... 236-237  
 MARQUES (PD) ..... 30-31, 32-33  
 MARQUES (WS) ..... 124-125  
 MARISE ..... 84-85, 168-169  
 MAVEN ..... 193  
 MELROSE ..... 144  
 MERCER ..... 145  
 MINECRAFT ..... 44-45  
 MOD ..... 320  
 MODERNE ..... 204  
 MORAE ..... 8-9, 10-11  
 MUSEO ..... 136-137  
 MYLIE ..... 196-197  
 MYTHICAL ..... 202

## N

NANTUCKET ..... 296-297  
 NAPA ..... 78  
 NEST ..... 333  
 NIGHTSTICK ..... 165  
 NIGHTVISION ..... 309  
 NIVEOUS ..... 60-61, 271

## O

OBERON ..... 329  
 OHM ..... 112  
 OSLO ..... 302-303

## P

PARALLAX (FM) ..... 252-253  
 PARALLAX (PD) ..... 24-25, 26-27  
 PARALLAX (WS) ..... 128-129, 130-131  
 PAVILION ..... 22-23  
 PEEK ..... 244-245  
 PENCIL SKIRT ..... 214-215  
 PIERCE ..... 90-91  
 PIN UP ..... 216-217  
 PLANETS ..... 269  
 POCKET ..... 199  
 PROHIBITION ..... 205

## Q

QUARTET ..... 6-7

## R

REED ..... 228-229  
 REPOSE ..... 150-151  
 ROCKABILLY ..... 36-37  
 ROCKPORT ..... 280-281  
 ROLAND ..... 182-183  
 RONDELLE ..... 160-161

## S

SCOPE ..... 223  
 SEVILLE ..... 200-201  
 SIMONE ..... 141  
 SINCLAIR ..... 18-19, 96-97  
 SIRIUS ..... 28-29  
 SLANT ..... 321

SLEEK ..... 306-307  
 SLEEPLESS ..... 310-311  
 SLICE ..... 266  
 SODOR ..... 318-319  
 SOLARIS ..... 66-67  
 SPA ..... 330  
 SPECTRE ..... 126-127  
 SPRIG ..... 212-213  
 STAG ..... 298-299  
 STACK ..... 62-63  
 STEAMPUNK ..... 332  
 STRETCH ..... 233  
 STRIP ..... 164  
 STYX ..... 132-133  
 SUMMIT ..... 276-277  
 SVELTE ..... 159

## T

TAO ..... 331  
 TATE ..... 278-279  
 TAURUS ..... 256-257  
 TIC TOC ..... 81  
 TIGHTROPE ..... 14-15  
 TRAP ..... 69  
 TRICK BOX ..... 65

## U

UPTOWN ..... 226

## V

VALERIUS ..... 12-13  
 VAUGHAN ..... 254-255  
 VERA ..... 122-123  
 VIBE ..... 232  
 VIDA ..... 57  
 VIEW ..... 138-139  
 VISTA ..... 152  
 VOLO ..... 52  
 VORNADO ..... 54-55, 56, 109

## W

WAVE ..... 140  
 WRIGHT ..... 260-261

## Y

YORK ..... 258-259

## B

BL-1630 ..... 233  
 BL-1021L ..... 222  
 BL-1021R ..... 222  
 BL-21205 ..... 208-209  
 BL-23210 ..... 212-213  
 BL-25214 ..... 210-211  
 BL-29903 ..... 223  
 BL-48007 ..... 218  
 BL-49018 ..... 219  
 BL-57108 ..... 216-217  
 BL-59110 ..... 214-215  
 BL-83023 ..... 220-221

## F

FM-4006 ..... 267  
 FM-4009 ..... 267  
 FM-4012 ..... 267  
 FM-4014 ..... 267  
 FM-4109 ..... 266  
 FM-4111 ..... 266  
 FM-4115 ..... 266  
 FM-4610 ..... 263  
 FM-4615 ..... 263  
 FM-4622 ..... 263  
 FM-13114 ..... 264-265  
 FM-13120 ..... 264-265  
 FM-13126 ..... 264-265  
 FM-16617 ..... 269  
 FM-21720 ..... 262  
 FM-21728 ..... 262  
 FM-27214 ..... 238-239  
 FM-27218 ..... 238-239  
 FM-33718 ..... 268  
 FM-33723 ..... 268  
 FM-43222 ..... 236-237  
 FM-45008 ..... 258-259  
 FM-45012 ..... 258-259  
 FM-46010 ..... 260-261  
 FM-46014 ..... 260-261  
 FM-49118 ..... 256-257  
 FM-53116 ..... 250-251  
 FM-63216 ..... 240-241  
 FM-67116 ..... 254-255  
 FM-73132 ..... 252-253  
 FM-73142 ..... 252-253  
 FM-W33113 ..... 246-247  
 FM-W45205 ..... 244-245  
 FM-W47205 ..... 242-243  
 FM-W47206 ..... 242-243  
 FM-W52306 ..... 271  
 FM-W52309 ..... 271  
 FM-W57806 ..... 270  
 FM-W57809 ..... 270  
 FM-W57812 ..... 270  
 FM-W57815 ..... 270  
 FM-W93216 ..... 248-249

## P

PD-13006 ..... 112  
 PD-13714 ..... 38-39  
 PD-13720 ..... 38-39  
 PD-13726 ..... 38-39  
 PD-14032 ..... 48  
 PD-15052 ..... 49  
 PD-16063 ..... 46-47  
 PD-17023 ..... 44-45  
 PD-18041 ..... 42-43  
 PD-20004 ..... 50-51  
 PD-20010 ..... 50-51  
 PD-20014 ..... 50-51  
 PD-22744 ..... 52  
 PD-22754 ..... 52  
 PD-22775 ..... 52  
 PD-23852 ..... 72  
 PD-26611 ..... 80  
 PD-26616 ..... 80  
 PD-29256 ..... 6-7  
 PD-29803 ..... 62-63  
 PD-29806 ..... 62-63  
 PD-29809 ..... 62-63  
 PD-29828 ..... 64  
 PD-29858 ..... 64  
 PD-31228 ..... 4-5  
 PD-31727 ..... 73  
 PD-31735 ..... 73  
 PD-31947 ..... 65  
 PD-33230 ..... 8-9  
 PD-33244 ..... 10-11  
 PD-33718 ..... 53  
 PD-33732 ..... 53  
 PD-33743 ..... 53  
 PD-35246 ..... 14-15  
 PD-37224 ..... 12-13  
 PD-37806 ..... 81  
 PD-37814 ..... 81  
 PD-39214 ..... 83  
 PD-41210 ..... 94-95  
 PD-42909 ..... 78  
 PD-42912 ..... 78  
 PD-42918 ..... 78  
 PD-45747 ..... 76  
 PD-47821 ..... 102-103  
 PD-47828 ..... 70-71  
 PD-47839 ..... 70-71  
 PD-51030 ..... 40-41  
 PD-51041 ..... 40-41  
 PD-51050 ..... 40-41  
 PD-51148 ..... 74-75  
 PD-52008 ..... 117  
 PD-52307 ..... 60-61  
 PD-52310 ..... 60-61  
 PD-52313 ..... 60-61  
 PD-55906 ..... 68  
 PD-55912 ..... 68  
 PD-60944 ..... 58-59  
 PD-60964 ..... 58-59  
 PD-61110 ..... 104-105  
 PD-65244 ..... 22-23  
 PD-67209 ..... 100-101  
 PD-68909 ..... 114-115  
 PD-69108 ..... 106-107  
 PD-70913 ..... 79  
 PD-70925 ..... 79  
 PD-70937 ..... 79  
 PD-70945 ..... 79  
 PD-71226 ..... 16-17  
 PD-72006 ..... 110-111

PD-72718	57
PD-72724	57
PD-73129	26-27
PD-73139	26-27
PD-73155	24-25
PD-73210	96-97
PD-73242	18-19
PD-75126	36-37
PD-75209	98-99
PD-76908	113
PD-79221	84-85
PD-81118	28-29
PD-81124	28-29
PD-81131	28-29
PD-83128	30-31
PD-83148	32-33
PD-84907	109
PD-85114	108
PD-85648	77
PD-87208	88-89
PD-87214	86-87
PD-87720	54-55
PD-87723	54-55
PD-87729	56
PD-87735	54-55
PD-87741	56
PD-89210	90-91
PD-91207	92-93
PD-94940	66-67
PD-95820	69
PD-95827	69
PD-95838	69
PD-97145	34-35
PD-97218	20-21
PD-98908	116
PD-W15918	314
PD-W17216	284-285
PD-W36610	317
PD-W48616	328
PD-W63114	306-307
PL-LED14	230
PL-LED15	232
PL-LED17	231
PL-LED23	231
PL-LED24	230
PL-LED25	232
PL-LED34	231
PL-LED37	232
PL-11017	228-229
PL-11025	228-229
PL-16017	224-225
PL-16027	224-225
PL-11033	224-225
PL-50011	227
PL-50017	227
PL-50023	227
PL-52017	226
PL-52025	226
PL-52034	226
PM-W15928	314
PM-W48620	328

## W

WS-6718	163
WS-6724	163
WS-6736	163
WS-7213	153
WS-7222	153
WS-7230	153
WS-7316	159
WS-7322	159
WS-7334	159
WS-12712	202
WS-12713	202
WS-12718	202
WS-12724	202
WS-13107	190-191
WS-13115	190-191
WS-13122	190-191
WS-21014	193
WS-24016	194-195
WS-25014	192
WS-25612	198
WS-27010	196-197
WS-28021	200-201
WS-30018	142-143
WS-30907	199
WS-34027	150-151
WS-34037	150-151
WS-35020	146-147
WS-35027	146-147
WS-35819	165
WS-35825	165
WS-35837	165
WS-35849	165
WS-35861	165
WS-35873	165
WS-35897	165
WS-36022	144
WS-36032	144
WS-37024	145
WS-37034	145
WS-38024	148
WS-38036	148
WS-40615	204
WS-40720	152
WS-40726	152
WS-41119	132-133
WS-41125	132-133
WS-41137	132-133
WS-42505	160-161
WS-42514	160-161
WS-42524	160-161
WS-42618	203
WS-43114	188-189
WS-45105	186-187
WS-45620	205
WS-47108	184-185
WS-47116	184-185
WS-47828	162
WS-47838	162
WS-53223	120-121
WS-55206	174-175
WS-57205	170-171
WS-59210	172-173
WS-61216	176-177
WS-63718	164
WS-63724	164
WS-63736	164
WS-65118	136-137
WS-65128	136-137
WS-69815	149

WS-69826	149
WS-69838	149
WS-73117	130-131
WS-73118	128-129
WS-73123	130-131
WS-73124	128-129
WS-77127	134-135
WS-77137	134-135
WS-77612	154-155
WS-77618	154-155
WS-77624	154-155
WS-77636	154-155
WS-79121	141
WS-79130	141
WS-79220	168-169
WS-79622	156-157
WS-79628	156-157
WS-79636	156-157
WS-81208	180-181
WS-83120	124-125
WS-83129	124-125
WS-83139	124-125
WS-83212	182-183
WS-85212	178-179
WS-85618	158
WS-85624	158
WS-85636	158
WS-87117	140
WS-87128	140
WS-89120	138-139
WS-89128	138-139
WS-93120	126-127
WS-93127	126-127
WS-95227	122-123
WS-W5312	331
WS-W5318	331
WS-W11914	322
WS-W11920	322
WS-W11926	322
WS-W13918	312
WS-W13924	312
WS-W14911	321
WS-W15216	274-275
WS-W15224	274-275
WS-W15708	318-319
WS-W15710	318-319
WS-W15912	313
WS-W15918	313
WS-W15924	313
WS-W17214	282-283
WS-W17218	282-283
WS-W17222	282-283
WS-W21110	286-287
WS-W21116	286-287
WS-W21122	286-287
WS-W23105	302-303
WS-W24509	332
WS-W24513	332
WS-W25106	304-305
WS-W26712	333
WS-W26716	333
WS-W27106	300-301
WS-W29118	298-299
WS-W33111	288-289
WS-W33118	288-289
WS-W33125	288-289
WS-W36610	316
WS-W36614	316
WS-W35114	290-291
WS-W35118	290-291
WS-W37114	292-293
WS-W37120	292-293

WS-W39114	294-295
WS-W39120	294-295
WS-W41716	330
WS-W41722	330
WS-W42016	309
WS-W42020	309
WS-W43011	310-311
WS-W43015	310-311
WS-W44011	308
WS-W44014	308
WS-W45714	329
WS-W45720	329
WS-W45726	329
WS-W47809	323
WS-W47814	323
WS-W47820	323
WS-W48616	326-327
WS-W48620	326-327
WS-W48625	326-327
WS-W49214	276-277
WS-W52610	325
WS-W52614	325
WS-W52620	325
WS-W54614	315
WS-W54620	315
WS-W61806	324
WS-W61808	324
WS-W65607	320
WS-W69214	278-279
WS-W69222	278-279
WS-W77211	280-281
WS-W85113	296-297
WS-W85116	296-297

## Headquarters

Tel: 800.526.2588  
Fax: 800.526.2585

## West Coast Factory

1750 Archibald Ave  
Ontario, CA 91761

## East Coast Factory

44 Harbor Park Dr  
Port Washington, NY 11050

## Central Factory

1600 Distribution Ct  
Lithia Springs, GA 30122

Consult the factory to take advantage of our custom capabilities in large quantities.  
For up to date product specifications and assistance, please visit:  
**waclighting.com** or call **1-800-526-2588**

Copyright © 2022 by WAC Lighting.  
All rights reserved. This catalog is copyrighted and WAC Lighting will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

Many designs within are patented or patent pending. WAC Lighting will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe that its intellectual property is being infringed.

Copyright © 2022 by WAC Lighting.  
All rights reserved. This catalog is copyrighted and WAC Lighting will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

dweLED

