


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0276

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.


## Hardware Package (included):

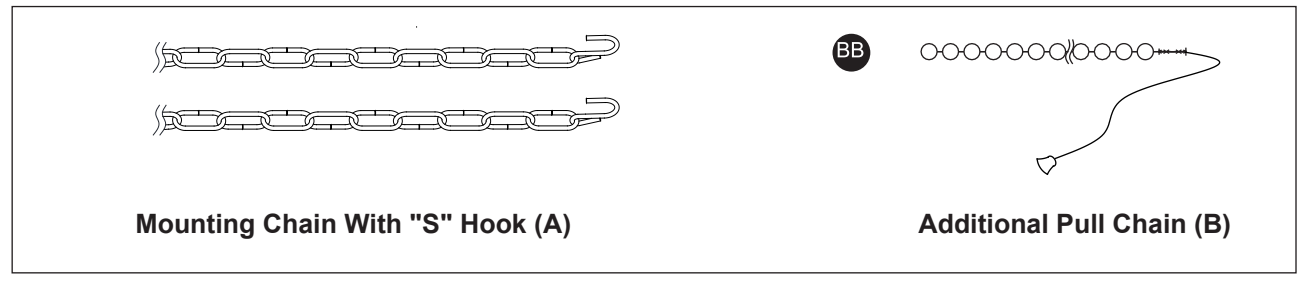


## Important to know

1. If you are not familiar with state and local electrical codes, it is recommended that you consult with a qualified electrician. Be sure to connect to a 2.4 GHz Wi-Fi network that covers your installation location.
2. Do not use in wet locations, use indoors only.
3. Non-replaceable LEDs.
4. Caution: LEDs emit bright light. Avoid looking directly into the light source for prolonged periods to avoid eye damage.
5. Not to be used with a dimming circuit or any other electronically controlled switch.
6. The light can not be installed in a ceiling where thermal radiation is generated.
7. The hook can hang the chain but not the power cable.
8. Specification:

Item #.	Dimension(inch)			Watts	Weight (lbs)	
	A	B	C			
H0276	46"	3-1/2"	2-3/4"	70	2.86	

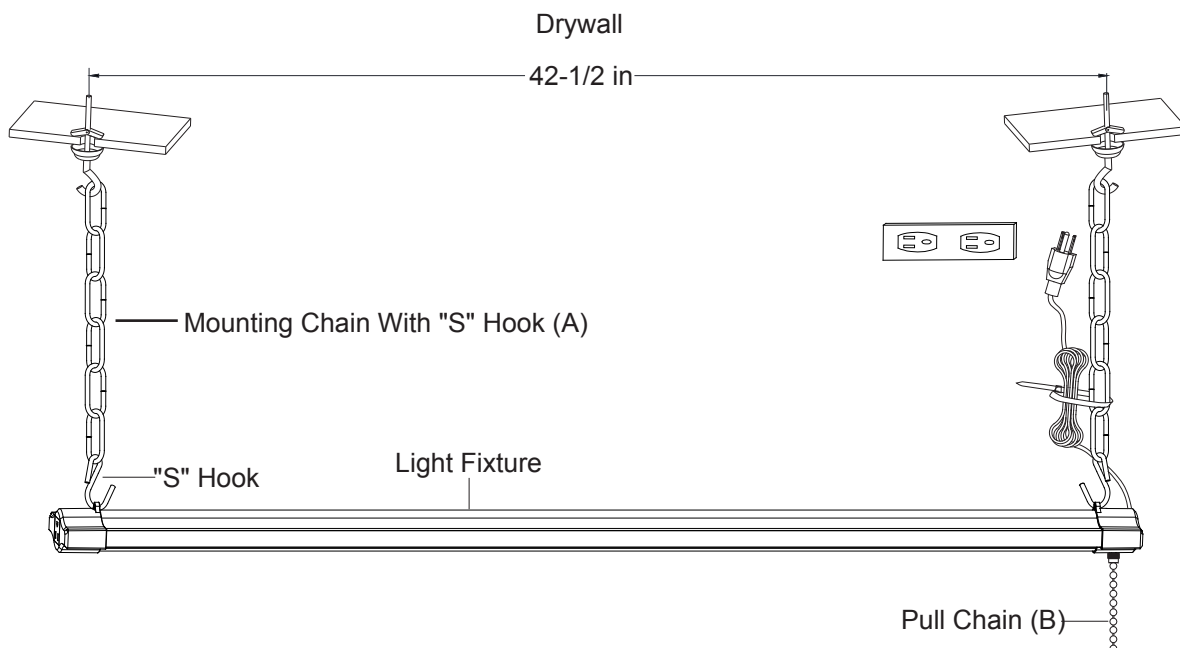

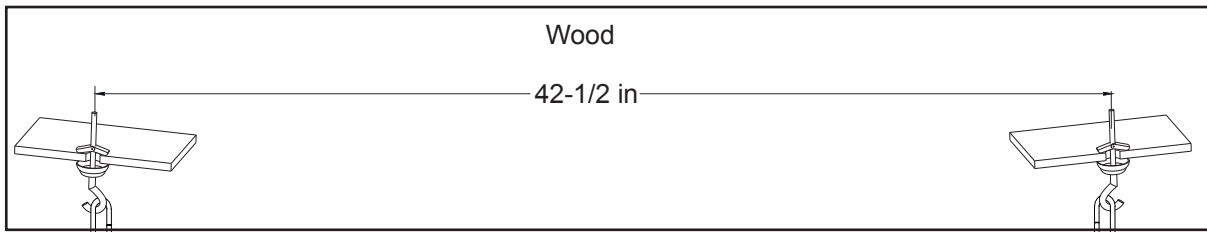

## Installation Steps

Turn off the power at fuse or circuit box.


1. Select suitable location that can support the weight of the fixture and has an outlet on the fixture and has an outlet on the ceiling to ensure that the fixture hangs properly. Determine method of mounting before drilling. Make two spots on the ceiling 42-1/2 in. apart for mounting hardware (not included).
- 2a. For mounting to drywall:  
Dry 1/4 in. holes in the ceiling to ensure the closed flaps of the toggle bolt (not included) clear the ceiling. Make sure to fasten the toggle bolt into the butterfly nut before inserting the flaps into ceiling with the toggle bolt protruding through the ceiling. Lock the assembly by screwing the hook into the ceiling.
- 2b. For mounting to wood:  
Dry 1/6 in. diameter pilot hole in the ceiling. Make sure to fasten the combo wood-machine end into the metal hook (not included) before screwing into ceiling to lock and tighten.
3. Attach the "S" hook at the bottom of the mounting chain to the hanger on the light fixture. Repeat this step on the other side of the light fixture.
4. Hang fixture light by placing one mounting chain (A) over each hook (not included) that has been installed in the ceiling. Fixture must hang at least 3 in. from ceiling. Fixture must hang at least 3 in. from ceiling. According to the required mounting height by adjusting the length of the chain (The fixture must be hanged in a same level).
5. Plug power cable into ceiling outlet. Fold the excess cable and fasten it with cable tie (not included). The attached pull chain (B) can be lengthened with an additional pull chain (B) if necessary.

Turn on the power at fuse or circuit box.

### Linking multiple fixtures:

The fixture can be connected in series with the power cord of this product. Maximum link up to 6pcs of 46" LED shop lights.

1. Connect the lights by plugging the power cable into the power socket of the other light. When connected with a power cord, the maximum distance between the two lights is 5 feet.
2. Provide power to the fixture only after all linking connections have been finished.
3. Only the first light fixture needs to be plugged into a receptacle outlet.

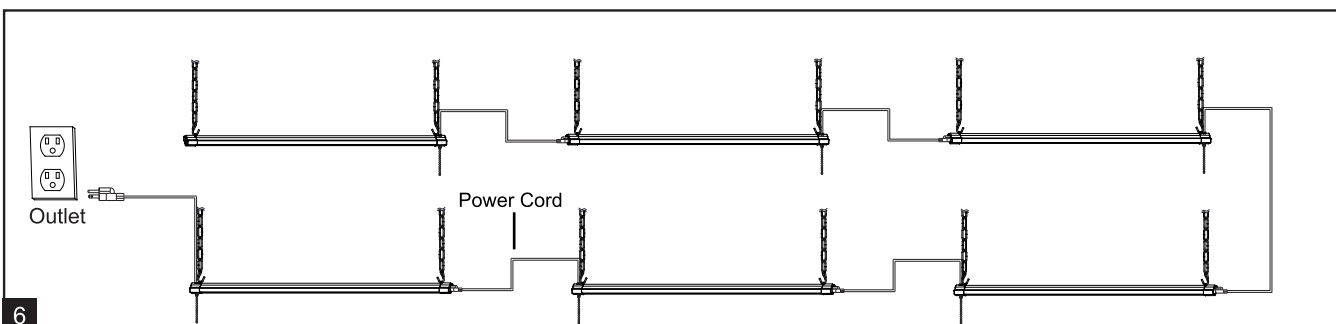


## REGISTRATION / LOGIN / PASSWORD RETRIEVAL


Setting for single light through mobile device (Take iOS for example as below. Android will be slightly different).

### Before you start




1. Download the Smart Life App from the Apple App Store or Android Google Play store. Registration  
If you do not have the app account, you may choose to register. The registration process is described on this page and the next.

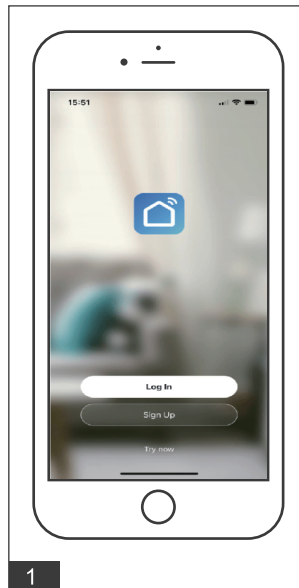

2. Click "Sign up" to go to the Smart Life Privacy Policy page. Click "Agree" to proceed to the registration page.

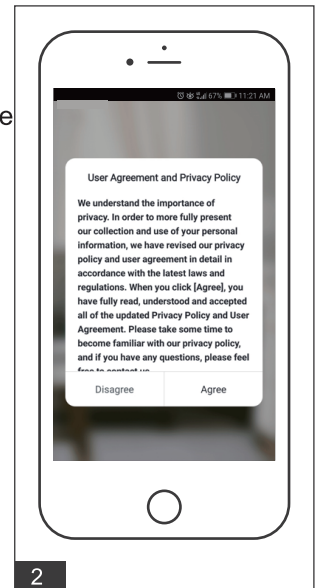

3. The system will identify automatically the country/region you are in, or you may choose to select manually a country/region. Enter your email and click "Get Verification Code", and enter the verification code you received. Then enter the password and click "Completed" to finish registration, as shown in Fig.3, Fig.3a, Fig.3b.

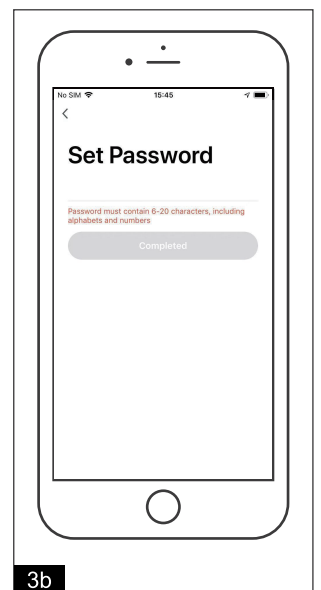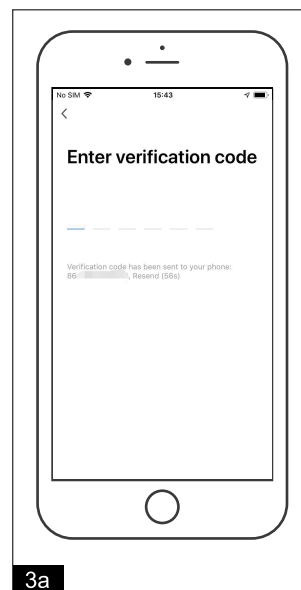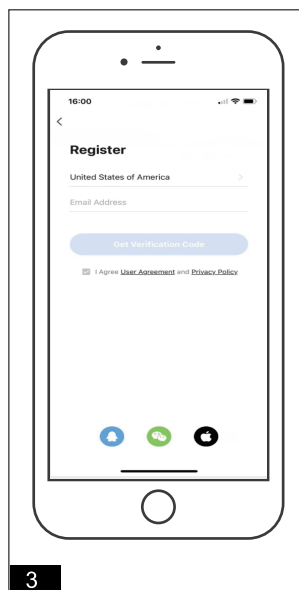

### Account ID + Password Login


If you already have an app account, click "Log in" to proceed to the login page.

- a. The system will identify automatically the country / region you are in, or you may also choose to select manually a country / region.
- b. Enter the email you have registered and enter the password in to log in.

# REGISTRATION / LOGIN / PASSWORD RETRIEVAL (continued)

## Smart Life Login.


1. Enter the email you have registered and enter the password into log in as shown in Fig.1, Fig.1a.

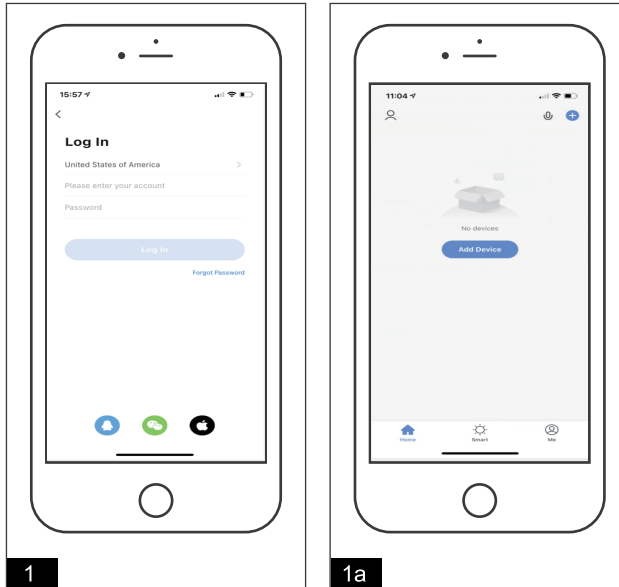


The Smart Life app supports two configurations: Add Manually mode, Auto scan search device mode. Turn on Bluetooth and connect to 2.4GHz Wi-Fi before connecting lights with the APP.

### Auto Scan


1. Click "Add Device" or "+" at the top right corner of the App home page shown in Fig.1, and enter the next page shown in Fig.2.

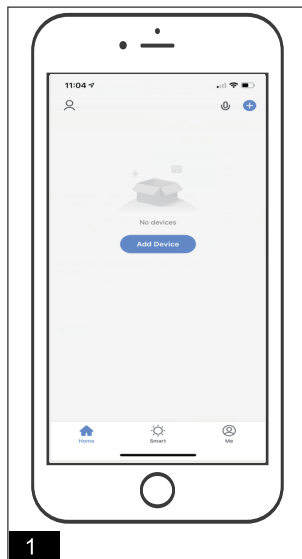

2. Click "Auto Scan" to enter the next page shown in Fig.3.

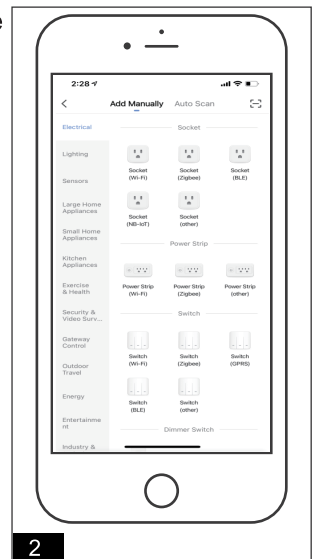


3. Please make sure the indicator light on the smart device is flashing rapidly and then click the button to proceed to the next step. You can switch the pull chain (B) by off-on-off-on-off-on to reset the device if the indicator light is not flashing rapidly.

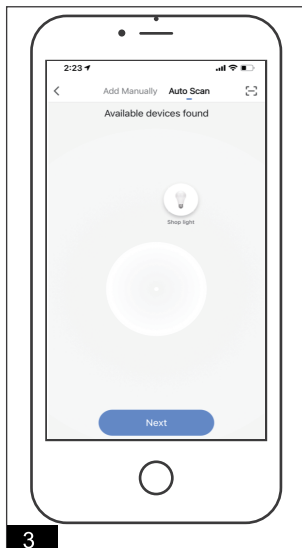

4. Enter the Wi-Fi account and password and click "Next" to enter the next page shown in Fig.5.


**Note: The Wi-Fi account and password in the APP must be the same as on the mobile phone**

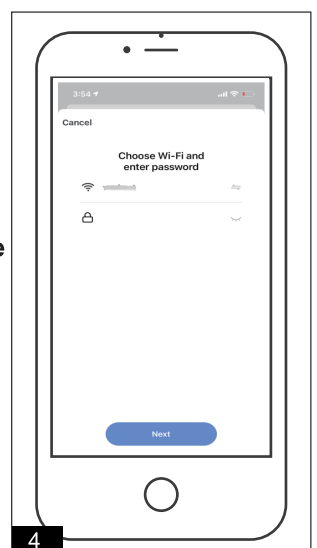




# USER GUIDE (continued)


5. Enter the page and Click "Done" to complete connecting as shown in Fig.5, Fig.5a, Fig.5b.

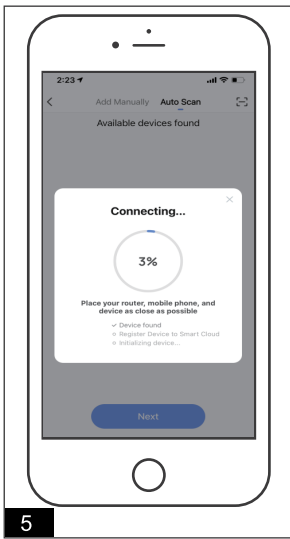

5

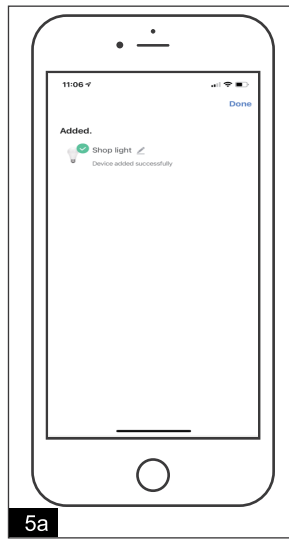


5a

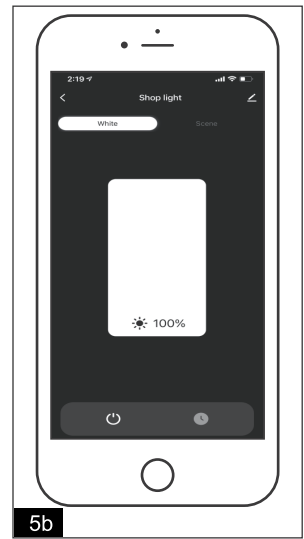

5b


## Add Manually mode

1. Click "Add Device" or "+" at the top right corner of the App home page upper right corner and enter the next page shown in Fig.2.

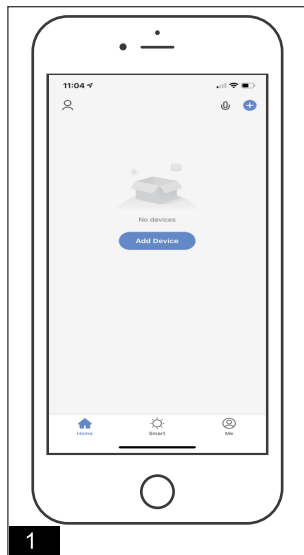


1

2. Click "Lighting" to enter the next page shown in Fig.3.

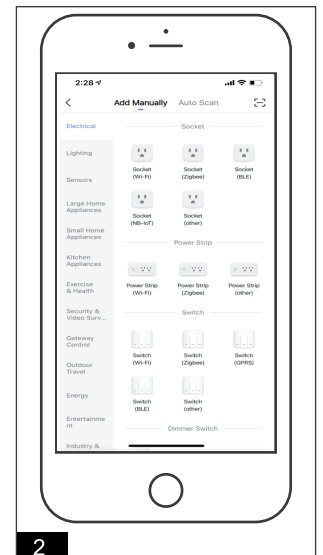


2

3. Click "Lighting Source" (BLE +Wi-Fi) to enter the next page shown in Fig.4.

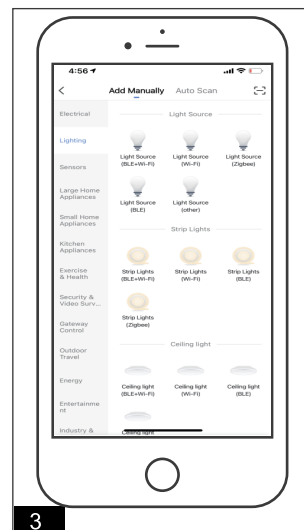

3


4. Click "Confirm the light is blinking rapidly" to enter the next page shown in Fig.5.

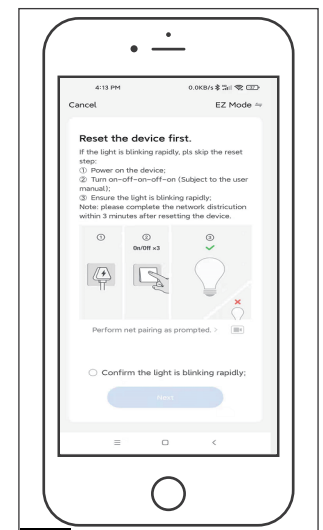


4

## USER GUIDE (continued)


5. Select the Wi-Fi in your home, enter the Wi-Fi password shown in Fig.6.

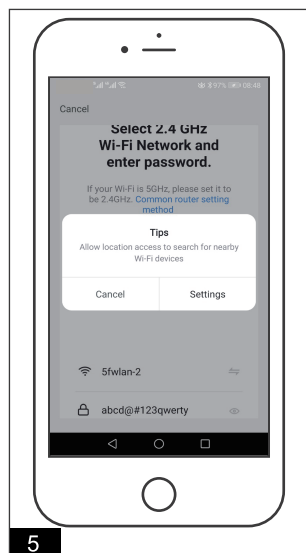



6. Click "Next" to enter the next page shown in Fig.7.

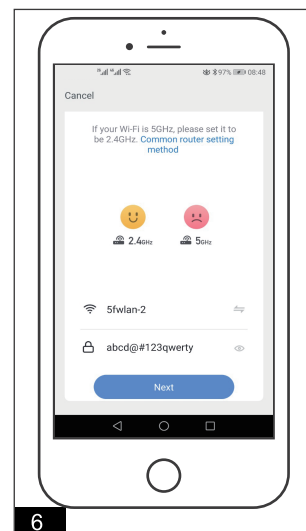

7. Enter automatic connection.


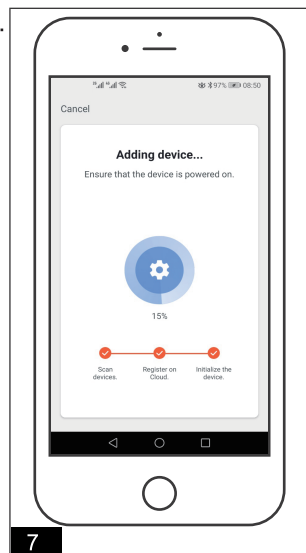


8. Click "Done" to complete the connecting as shown in Fig.8 and Fig.8a.

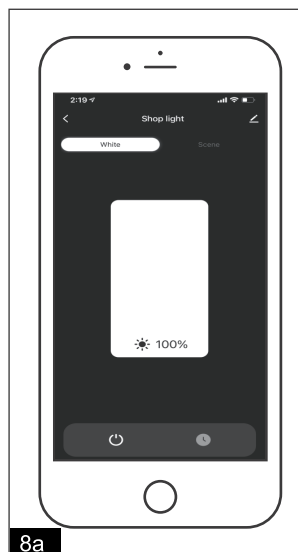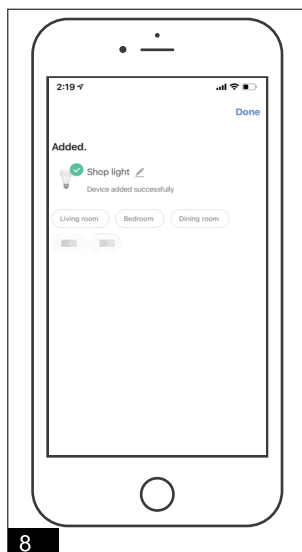

# USER GUIDE (continued)


## APP Function Introduction

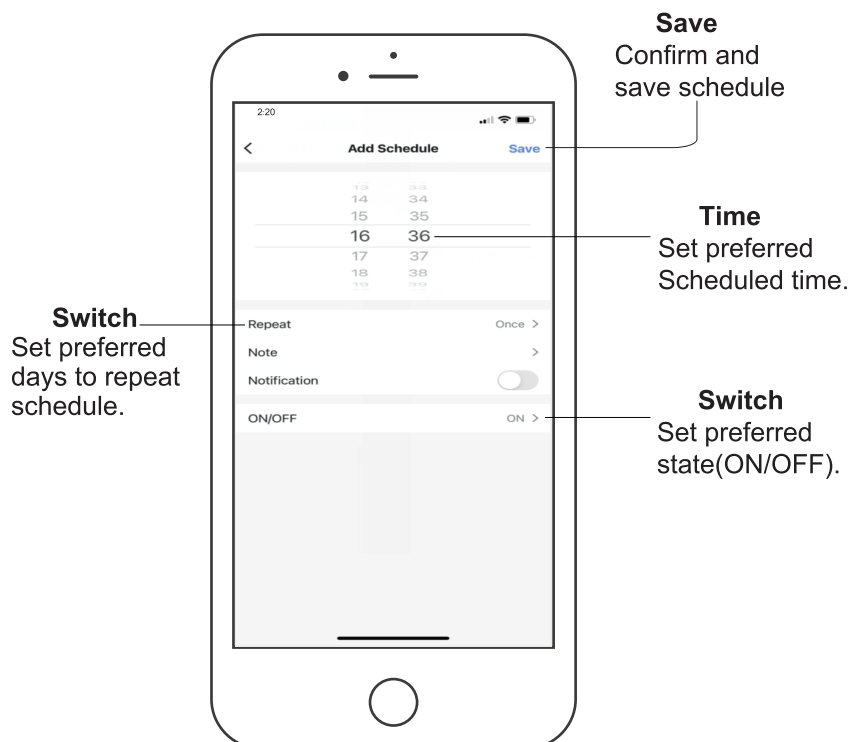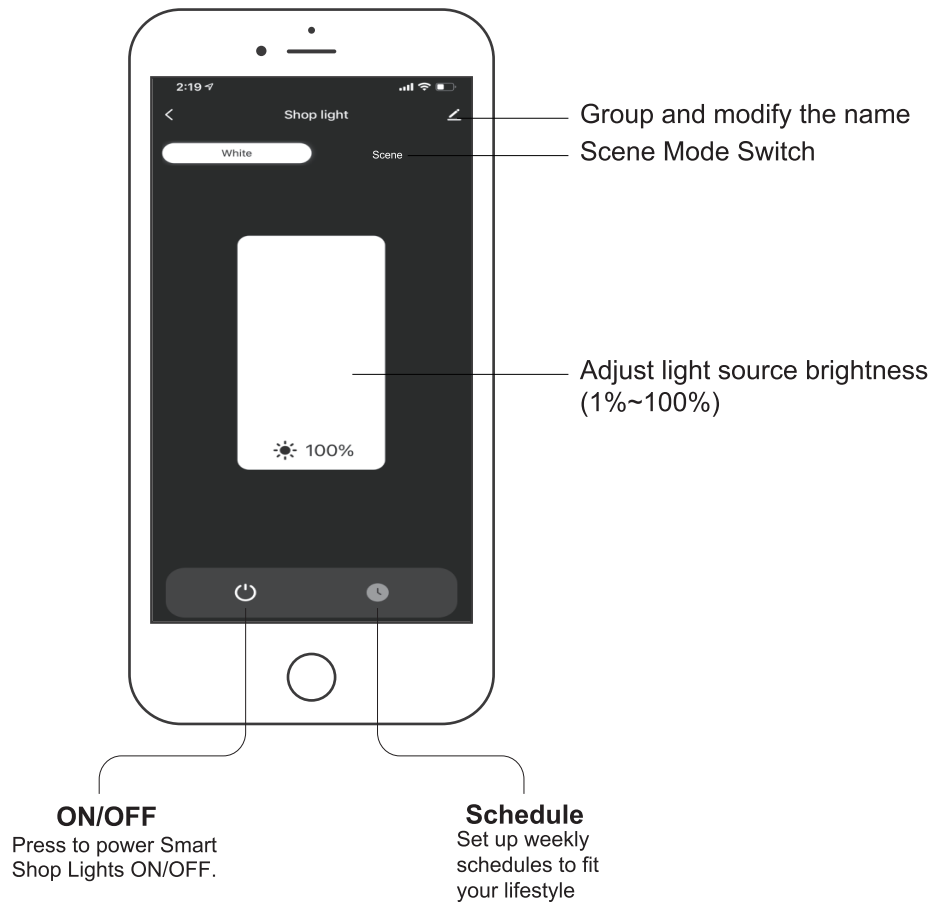


# USER GUIDE (continued)

## Home / Member Management


1. One account can manage multiple families at the same time. Click "me" to enter the next page shown in Fig.2.

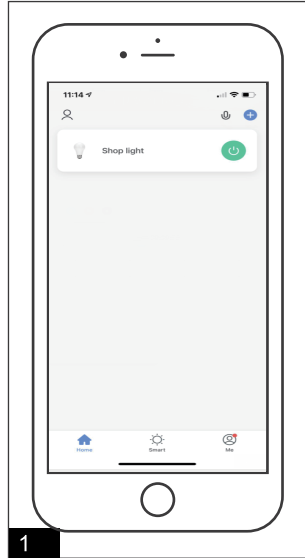


2. Click "Home Manager" to enter the next page shown in Fig.3.

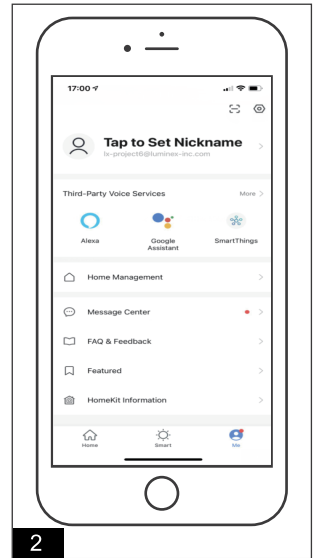


3. When logging in, click "Create a home" to add a home, as shown in Fig.3.

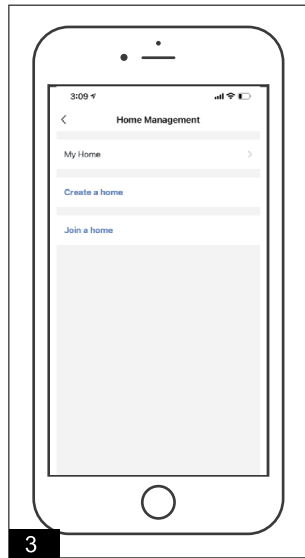


4. Click "Add Room" to add a room, as shown in Fig.4.

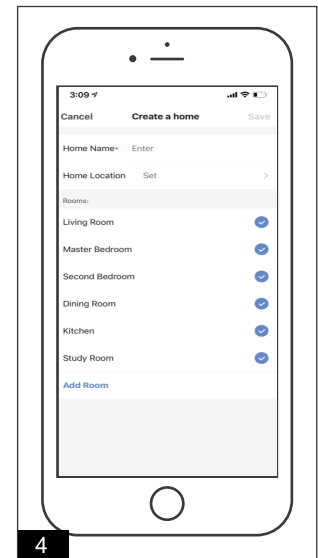

5. Click "OK" at the top right corner to complete room settings.

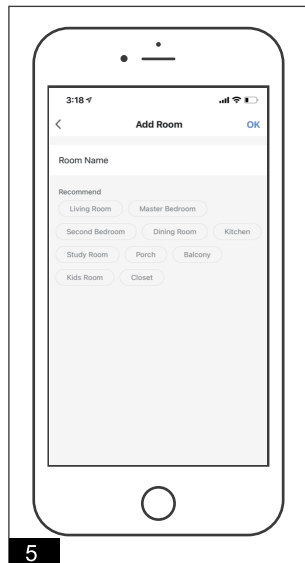


6. After click "Home", Room settings can be changed at anytime by clicking "..." in the upper right corner as shown in Fig.6.

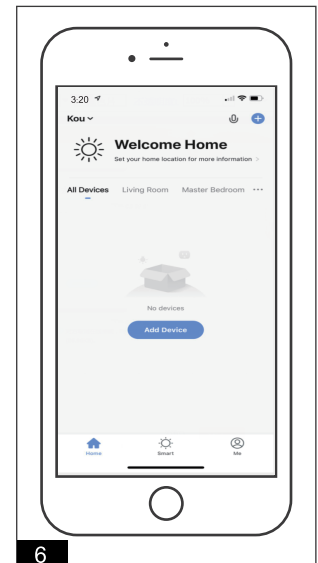


QUICK GUIDE OF USING GOOGLE HOME NEW

a. Connecting to Google Home


1. Search "Google Home" from the APP Store or Android Google Play store.

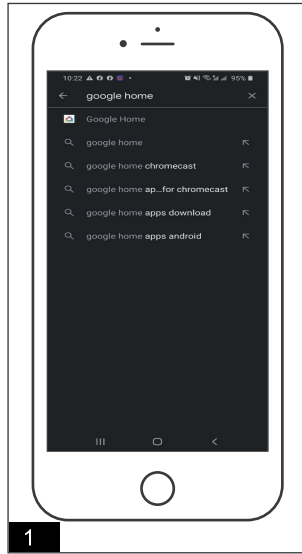


2. Download the Google home App from the APP Store or Android Google Play store.

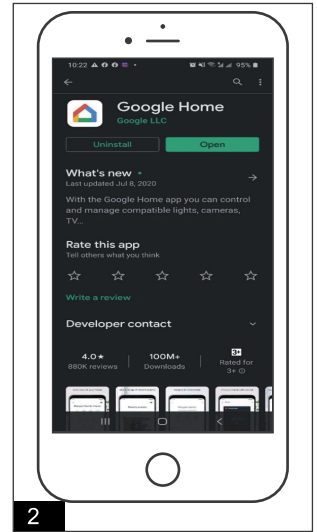


3. Start Google Home APP, then click "Set up Google Home".

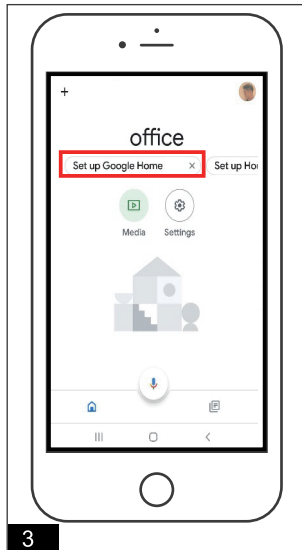


4. Connecting to Google Home.

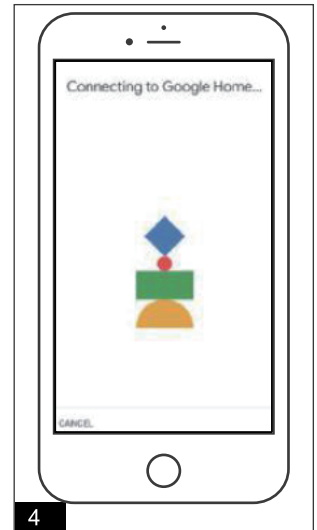

5. Click "YES" after hear the sound from Google Home speaker.

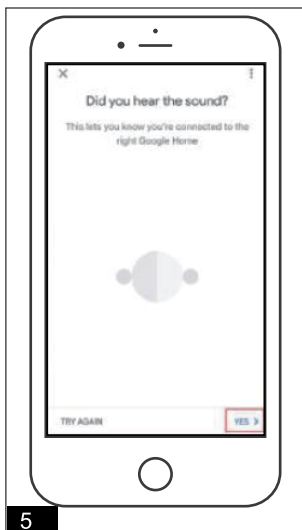


6. Set up location of Google Home to use, then click "Next" to enter the next page.

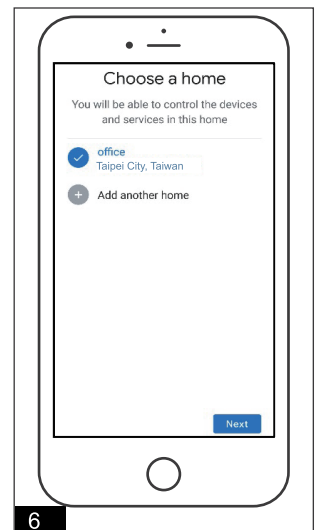


## USER GUIDE (continued)

7. Completed Google Home setting up.

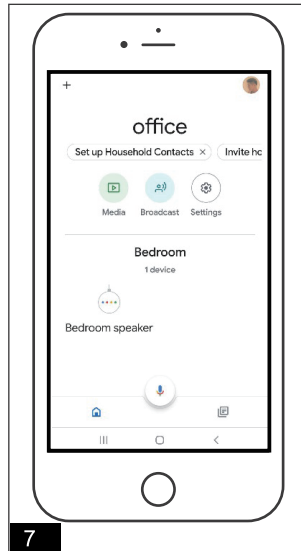


### b. Connecting shop light to Google Home


1. Star Smart Life APP and click the "Shop Light".

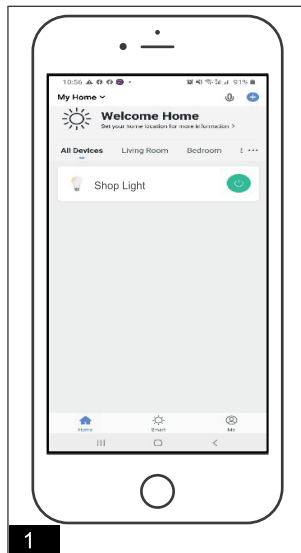


2. Click "⌵" icon on the upper right corner.

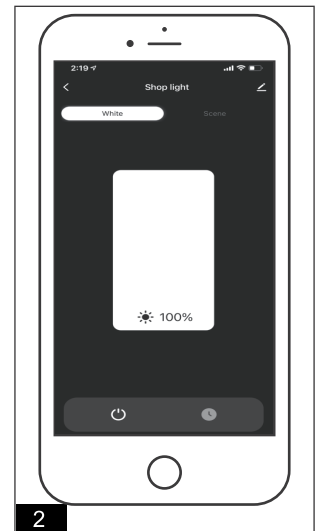

3. Click "Google Assistant".

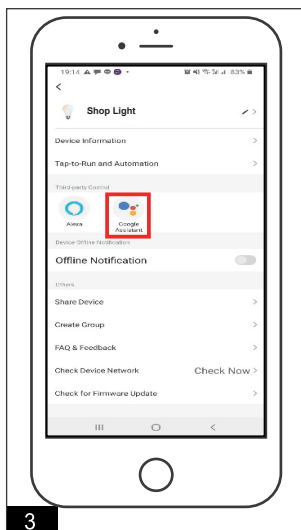


4. Click "Link with Google Assistant".

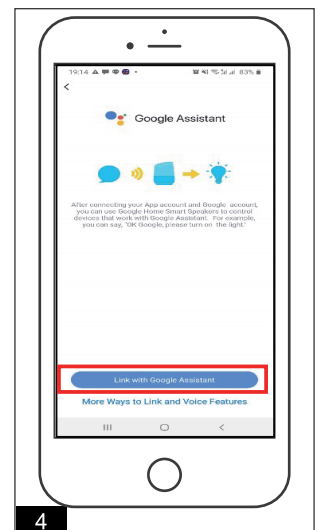


## USER GUIDE (continued)


5. Start Google Home.

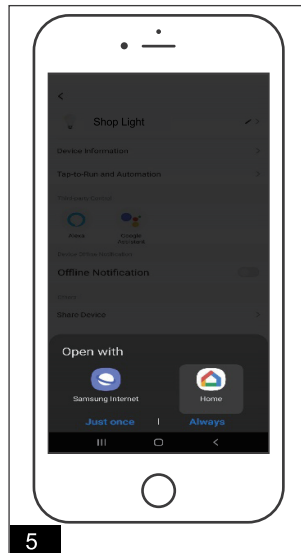


6. Enter the email and password registered in the Smart Life APP.

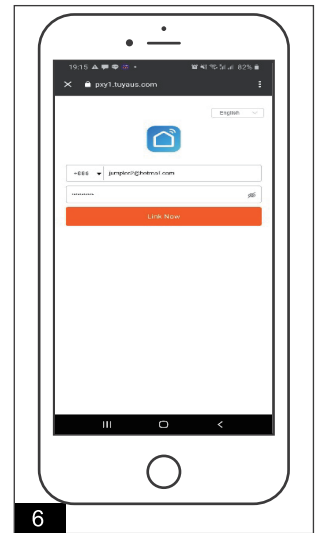


7. Click "Authorize".

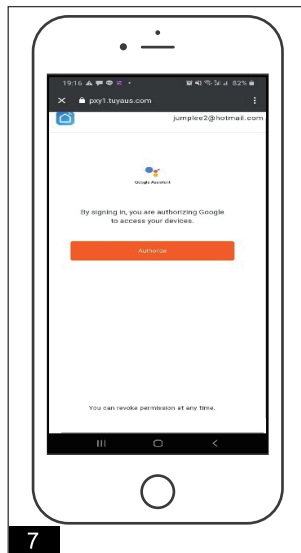

8. After entering the Google Home APP, select the light to be added and click "Done".

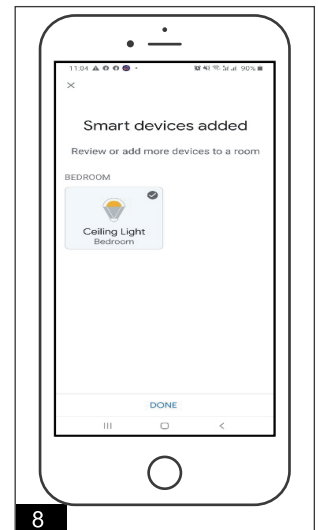


9. After completing the link between the ceiling light and Google Home, the light can be controlled by voice through the speaker.

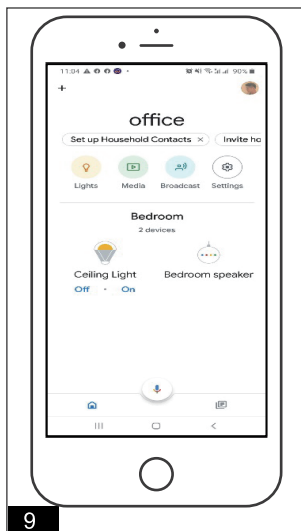


## USER GUIDE (continued)

### Google Home Light Control Interface


1. OFF

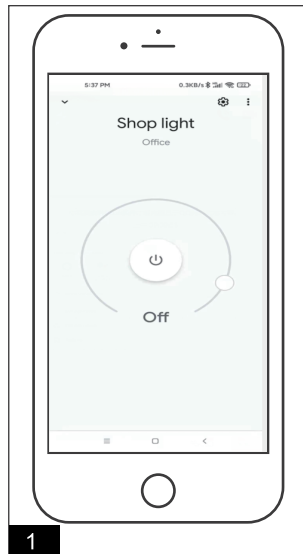

2. ON

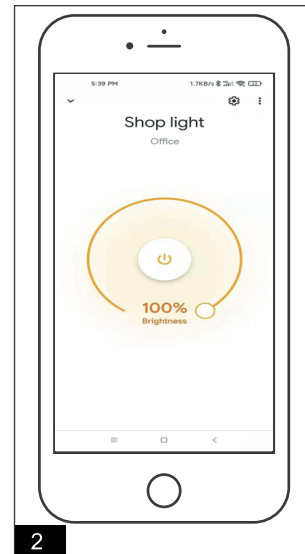

3. Brightness adjust  
from 1%~100%

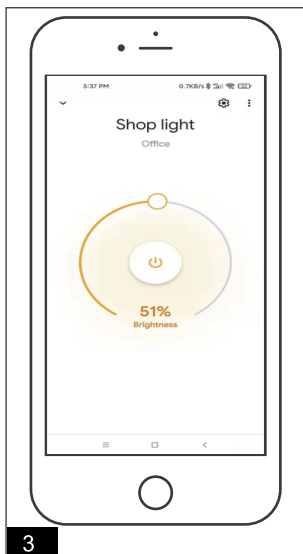

### Control devices by voice commands

Smarter More Helpful Home Shop Light that work with Google Home Control lighting with simple voice commands.

ON/OFF:

Hey Google, turn the "Shop Light" ON / OFF

Adjust brightness:

Hey Google, turn the "Shop Light" to 1% ~ 100% percent.



## USER GUIDE (continued)


### SET UP AMAZON ECHO AND ENABLE SMART LIFE SKILL

Search "Amazon Alexa" in App Store or Google Play to install the App.


We take App configuration as an example. Configuration through web and App are basically the same.

1. Set up Echo with Alexa app  
You can skip this part if your Echo is already set up.


- 1). Make sure your Echo device is energized.
- 2). Make sure Echo is in a Wi-Fi network that can access Amazon services smoothly.
- 3). Open the Alexa App by tapping the App icon on your mobile device.
- 4). Type in your Amazon account and password, then tap "SIGN IN".

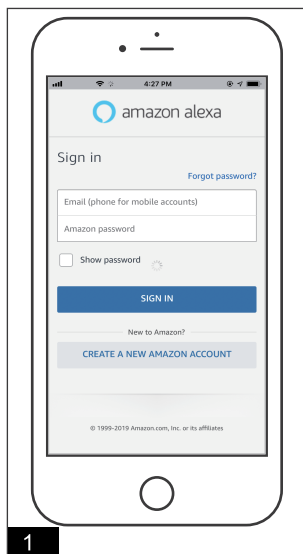


2. Click the hamburger menu the top left corner.

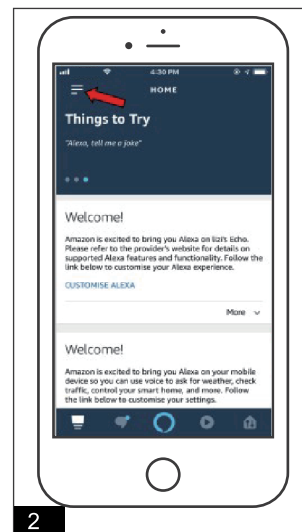


3. select "Add Device".

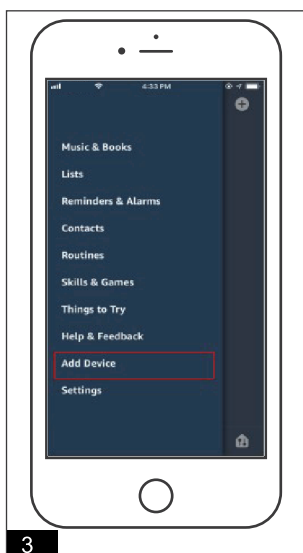


4. Select "Amazon Echo" in the set up page.

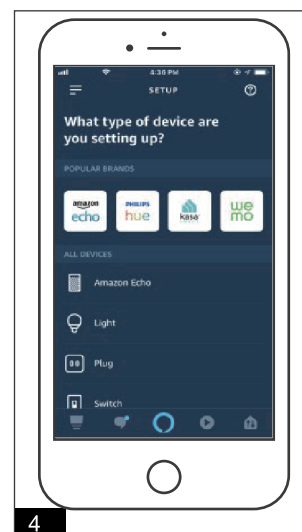

5. As shown in Fig.5.

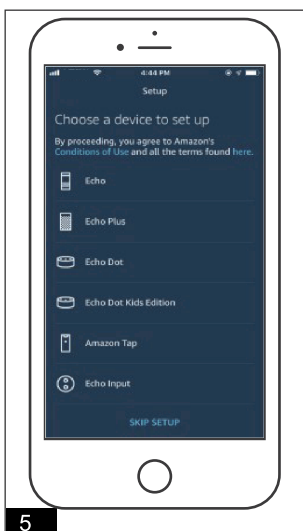

6. As shown in Fig.6.

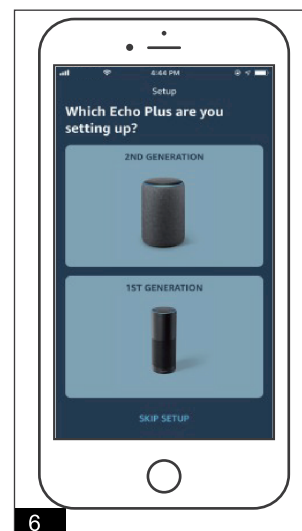


## USER GUIDE (continued)


7. Select the type of your Echo, then click "CONTINUE".




8. Long press the dot button on the top of your Echo device until the orange light shows up, then click "CONTINUE". Make your mobile phone connected to the hot spot of echo, then click "CONTINUE".

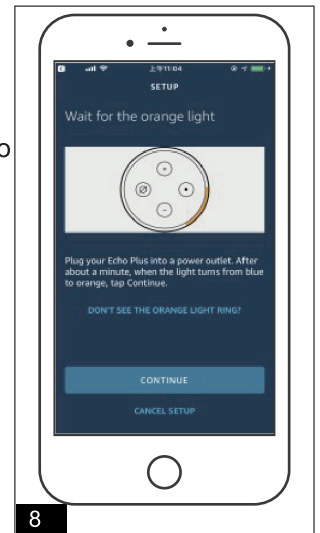


9. Connect your iPhone to your Echo Plus.

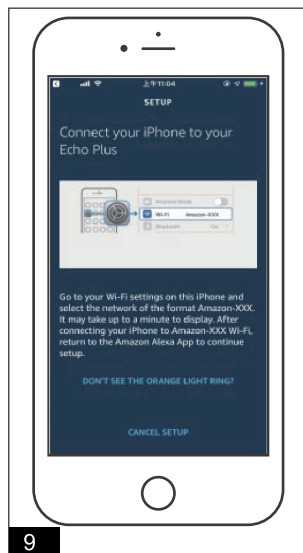


10. Continue Echo Plus setup.

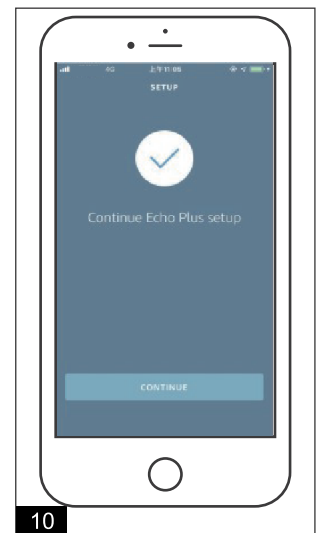

11. Select a Wi-Fi to let Echo have the access to the internet. Type in the Wi-Fi password, then click "CONNECT". Echo may take several minutes to connect the network.

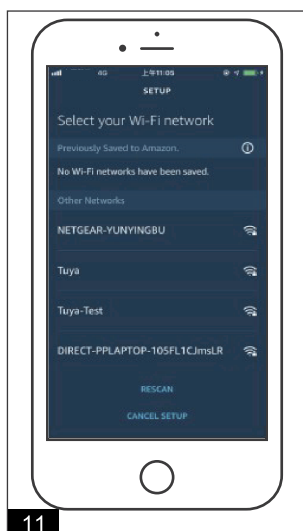


12. Preparing your Echo Plus.

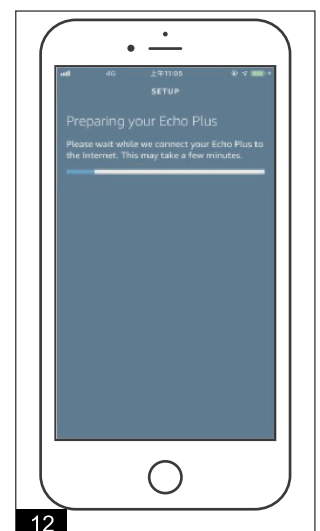


## USER GUIDE (continued)


13. Click "CONTINUE" when Echo is connected to the network.

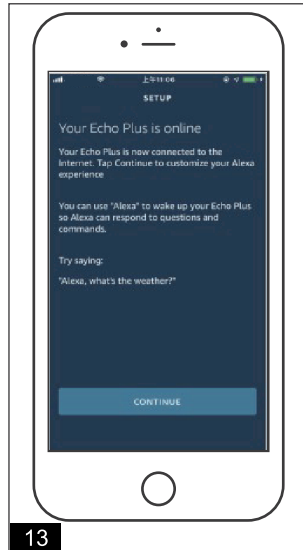


14. After an introduction video, click "NEXT" to finish the setup. At this point, the Echo configuration process ends.

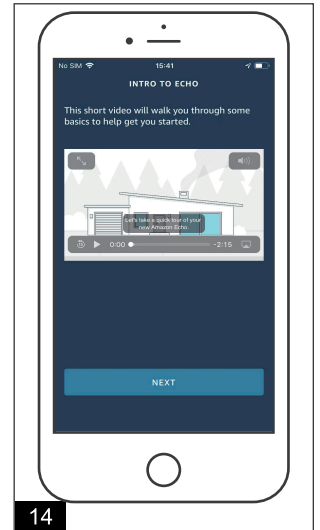


### Link Smart Life account to Alexa


15. Start the Alexa App then click on the "Menu" . (In the upper left corner) Select Skills & Games.

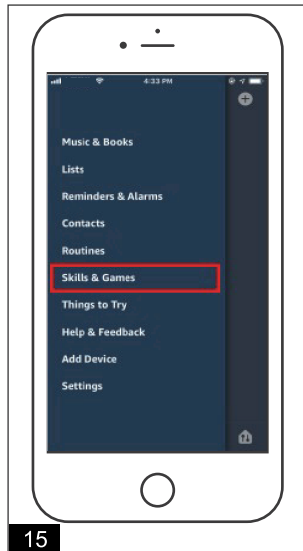


16. In the search menu, enter "Smart life".

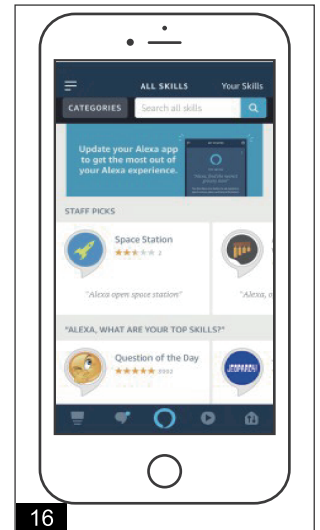

17. Click "Smart Life". Then click "ENABLE" to enable the Skill.

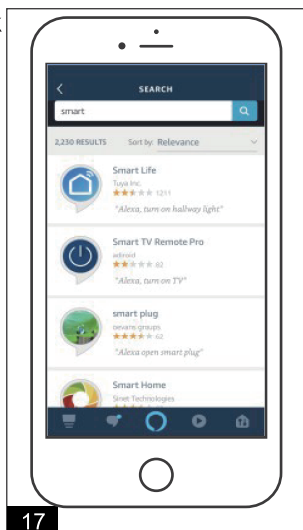


18. Enter the same user name & password that you have registered under the Smart life App. Then click "Login".

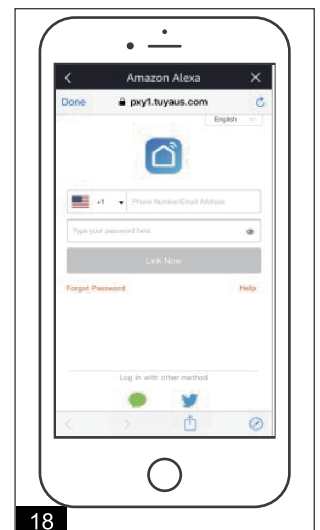


## USER GUIDE (continued)

19. Smart Life has been successfully linked.

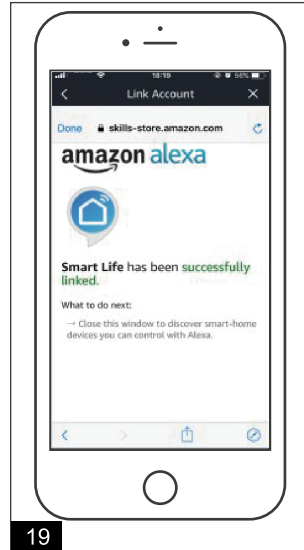


20. Link with Verification Code, open Tuya Smart App, click "Me—More Services—Alexa".

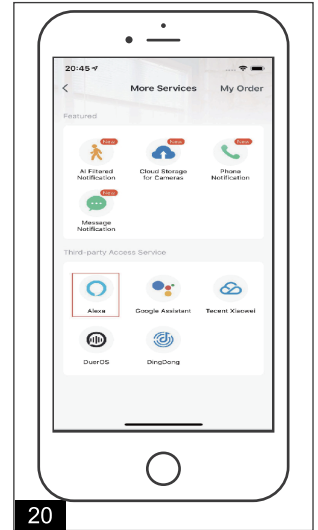


21. Amazon alexa.



22. Link to Amazon Alexa.

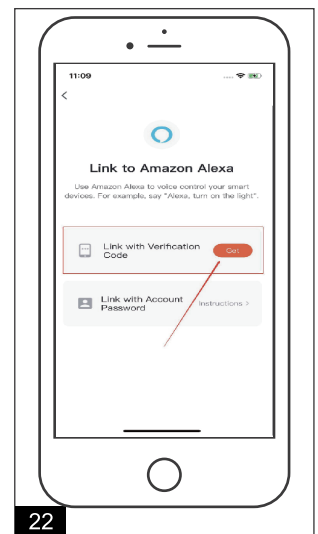

23. Copy and enter the code, and set up a new gesture password to continue.

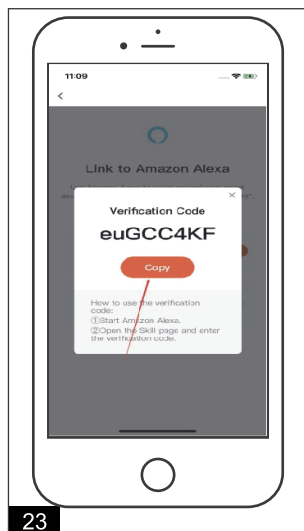


24. Discover devices  
Echo needs to discover your smart devices before it controls them. After the skill binding is successful will appear automatically. Click "DISCOVER DEVICES" to discover the device, or you can say "Alexa, discover devices" to Echo. Echo will discover devices which have already been added in the Smart Life App. You can also tap "DISCOVER DEVICES" to discover the smart devices. Discovered devices will be shown in the list.



**Note: Every time you change the device's name on Smart Life App, Echo must re-discover before you control them.**

## USER GUIDE (continued)

25. Add Group.

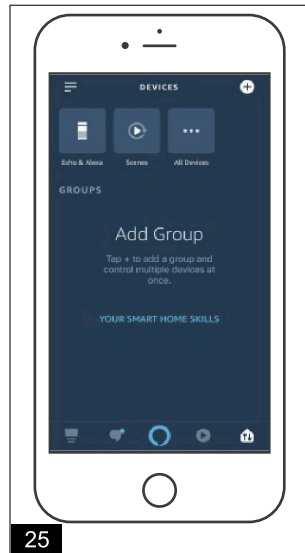

### Control devices by voice commands

Now you can control your smart devices through Echo. You can use the following commands to control your devices (e.g., bedroom light) :

Alexa, turn on/off bedroom light.

Alexa, set bedroom light to 50 percent.

Alexa, brighten/dim bedroom light.

The following parts are available for re-order if damaged or missing.

#### Spare Parts List:

