




# 20089WV



## CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.


**Warning** please make sure the electrical breaker is shut off before commencing with this installation

Read and familiarize yourself with these instructions before commencing

This fixture is certified for wall mounting only and is suitable for Damp locations and dimmable with a Triac Dimmer

The fixture uses a 120v A/C LED panel, no driver required

| Package Contents |                         |     |
|------------------|-------------------------|-----|
| Part             | Description             | Qty |
| A                | Fixture mounting plate  | 1   |
| B                | J-Box mounting screws   | 2   |
| C                | Wire connectors         | 3   |
| D                | Fixture assembly        | 1   |
| E                | Opal glass diffuser     | 1   |
| F                | Clear Acrylic Tube      | 1   |
| G                | Glass plate and screws  | 2   |
| H                | Glass clamp             | 2   |
| I                | Glass clamp screws      | 4   |
| J                | Fixture mounting screws | 4   |

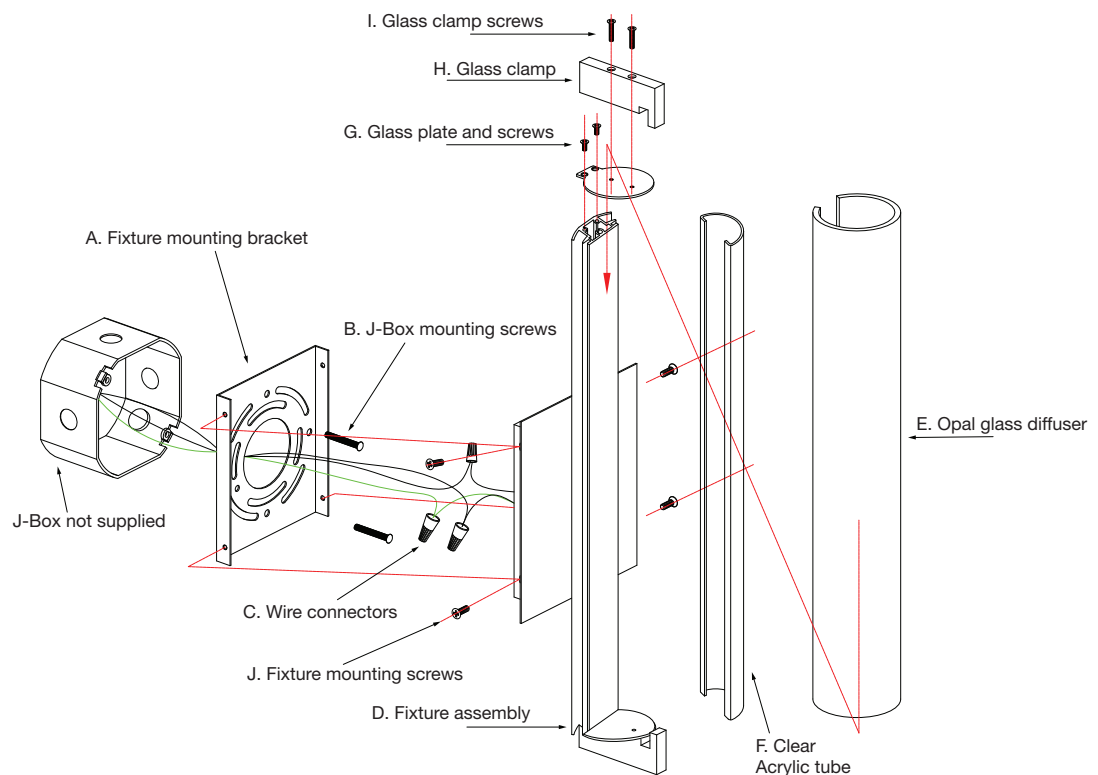

## Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- 1 Attach the Fixture mounting bracket (A) to the Junction-Box with the two supplied mounting screws (B).
- 2 Attach one set of the Glass plates (G) to the Fixture assembly (D) and secure in place with the supplied screws). (Supplied with the fixture is a clear Acrylic tube (F) that is optional, if used this will slide over the aluminium extrusion to cover the LED panel, if not used please dispose of this acrylic tube). Gently slide the Opal glass diffuser (E) by inserting it over the aluminum rail on the fixture assembly (D) and secure in place with Glass plates (G) and mounting screws.
- 3 Connect the supply wires to the fixture wires using the supplied electrical wire connectors (C). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 4 Attach the fixture assembly (D) to the mounting bracket (A) and secure with supplied screws (H)
- 5 Switch on the electrical breaker and your new fixture is ready for many years of trouble free use