## ASSEMBLY AND INSTALLATION INSTRUCTIONS

## W0304 WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements. 2. Read and save these instructions.

| Hardware Package   | (included):   |  |  |                  |  |
|--|---|--|--|------------------|--|
| Mounting Plate Unit (A)  | مسسطع<br>مسسطع<br>ounting Screw (B)                               | Wire Connector (C)                     | Bolt Nut (D)                                     | Socket Fixer (E) |  |
|  |   |  |  |                  |  |
| Fixture Wire<br>Wire Connector (C)<br>Fixture Ground Wire<br>Mounting Screw (B)<br>Mounting Plate Unit (A)<br>Green Ground Screw<br>Fixture Mounting Screw<br>House Ground Wire<br>Outlet Box  |   |  | Bolt N   | ut (D)           | Glass bracket<br>Socket<br>Glass Shade |
| Installation Steps   |   |  |  |                  | Spacer                                 |
| Turn off the power at fus  |   |  |  |                  | Socket Ring                            |
| <ol> <li>Unscrew the two bolt nu</li> <li>Attach the mounting pla<br/>Adjust the length of the point of t</li></ol> | ate unit (A) to the c<br>preinstalled fixture<br>wo fixture mount | outlet box by using<br>mounting screws | two mounting s<br>if necessary.<br><b>ned up</b> |                  |  |


 $\Im$  VAXCEL


231012

- 3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
  - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
  - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
  - Attach the fixture ground wire (bare wire) to the mounting plate unit (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C). Carefully put all of the wires back into the outlet box.
- 4. Attach the backplate of the fixture to the mounting plate unit (A) by aligning and inserting the two fixture mounting screws into set holes on backplate, then secure it with two bolt nuts (D).
- 5. Attach the glass shades onto the glass brackets and secure them with the spacers and socket rings, using supplied socket fixer (E).
- 6. Install 4 x 100W Max. medium base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.

## The following parts are available for reorder if damaged or missing.

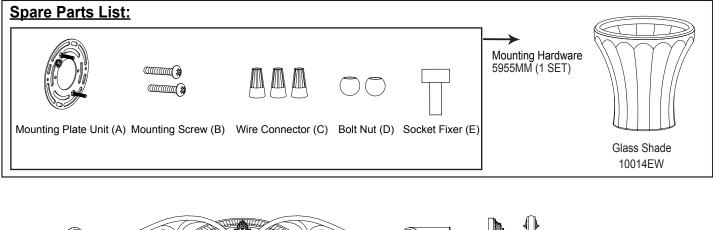

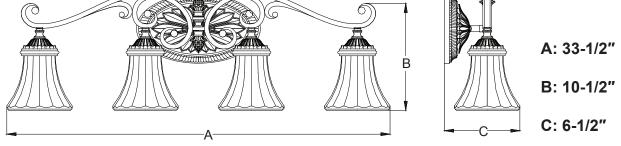

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained? info@vaxcel.com 1-800-482-9235



Page 2 / 2