



ASSEMBLY AND INSTALLATION INSTRUCTIONS

LS-VLD106BN / LS-VLD106PZ

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

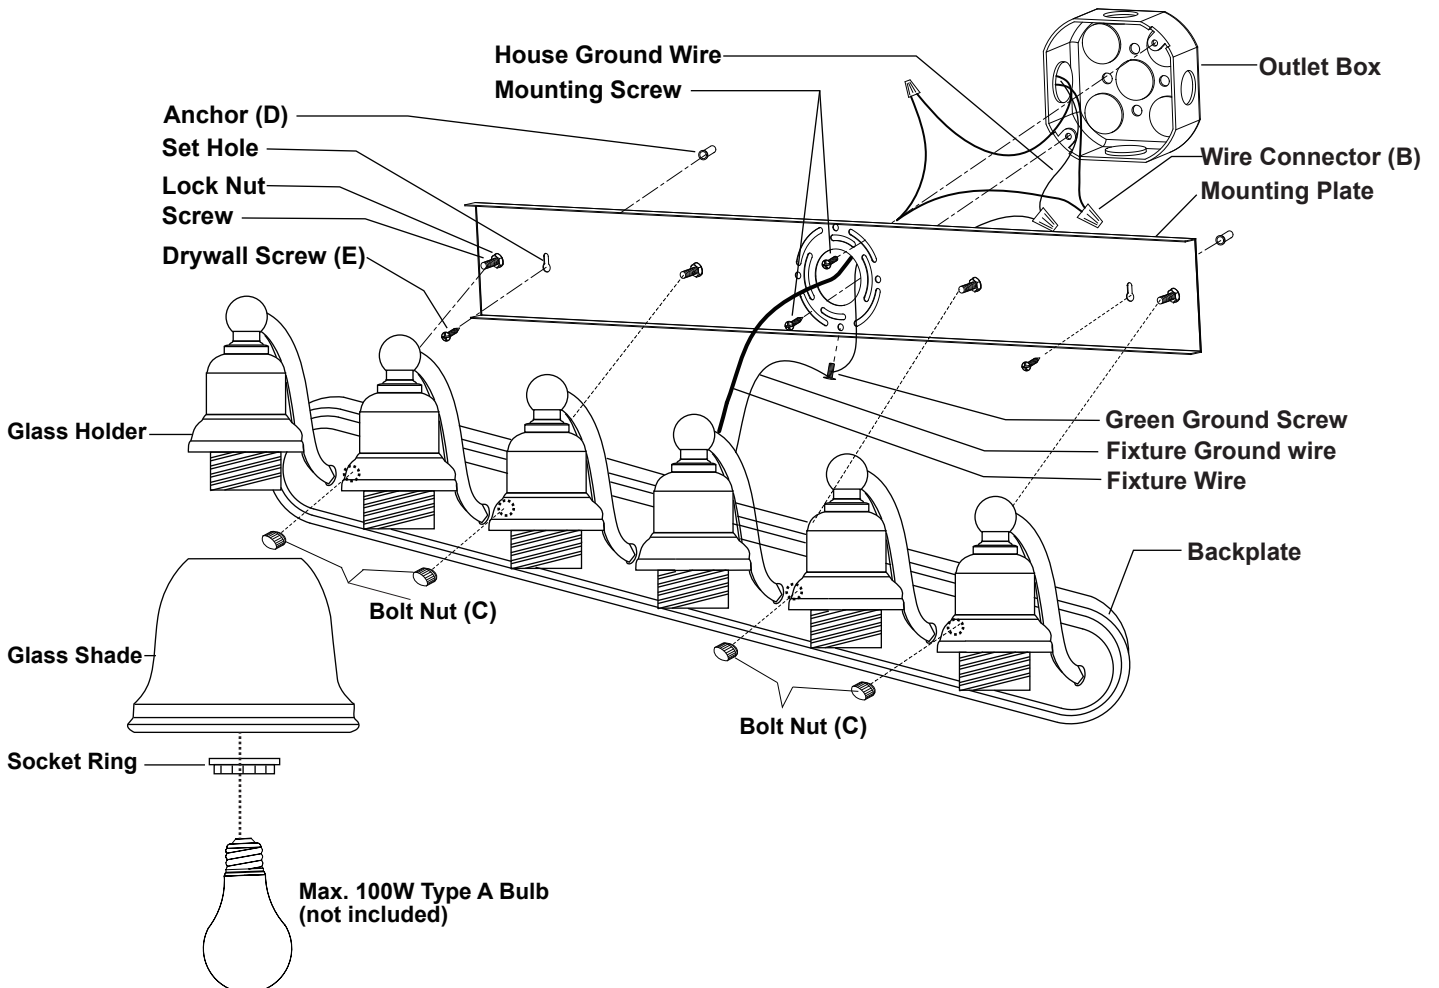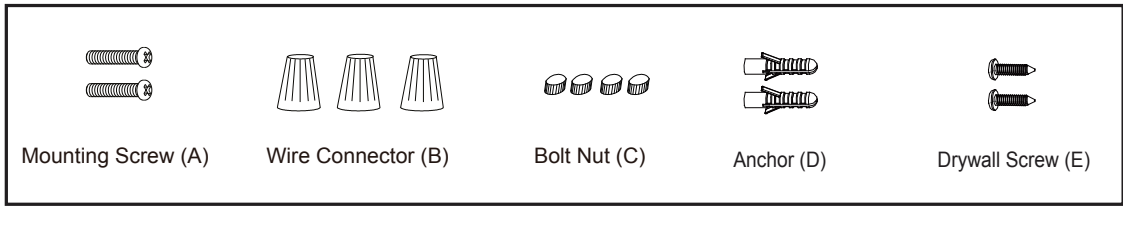

Installation Steps

Turn off the power at fuse or circuit box

1. Unscrew the bolt nuts (C) from the backplate, and then remove the mounting plate.

2. Attach the mounting plate to the wall.

a) If the wall material is wood:

Attach the mounting plate to the wall by using two mounting screws (A), then secure the drywall screws (E) through the set holes to the wall.

b) If the wall material is cement:

Place the mounting plate to the wall and mark the target on the wall from the set hole for drilling two holes. Remove the mounting plate. Drill the holes and thread the anchors into the holes, then attach the mounting plate to the outlet box by using two mounting screws. Secure the drywall screws (E) through the set holes into the anchors (D).

3. Pull out the outlet wires and the house ground wire from the outlet box. Make wire connections using the wire connectors (B):

---The black wire from the fixture to the black wire from the power source.

---The white wire from the fixture to the white wire from the power source.

---Attach the fixture ground wire to the mounting plate with the green ground screw, then connect it to the house ground wire with a wire connector (B).

Carefully tuck the wires back into the outlet box.

4. Attach the backplate to the mounting plate by using the screws, then secure them with the four bolt nuts (C).

5. Attach the glass shades to the glass holders, then secure them with the socket rings.

6. Install 6 x 100W Max. medium base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box

The following parts are available for reorder if damaged or missing.

Spare Parts List:




Mounting Screw (A)



Wire Connector (B)



Bolt Nut (C)




Anchor (D)





Drywall Screw (E)

Assembly Kit
6744MM (1 SET)
for LS-VLD106BN

6745MM (1 SET)
for LS-VLD106PZ



Glass Shade
947804A for LS-VLD106BN
947804 for LS-VLD106PZ

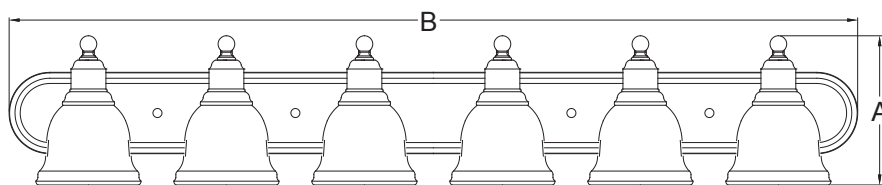

A: 8-1/2"

B: 48"

A: 8-1/2"

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com

1-800-482-9235

