

# Vernica Wall

LO1031\_-L1, LO1041\_-L1, LO1051\_-L1, LO1061\_-L1 | 1.1

## GENERATION LIGHTING WALL

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

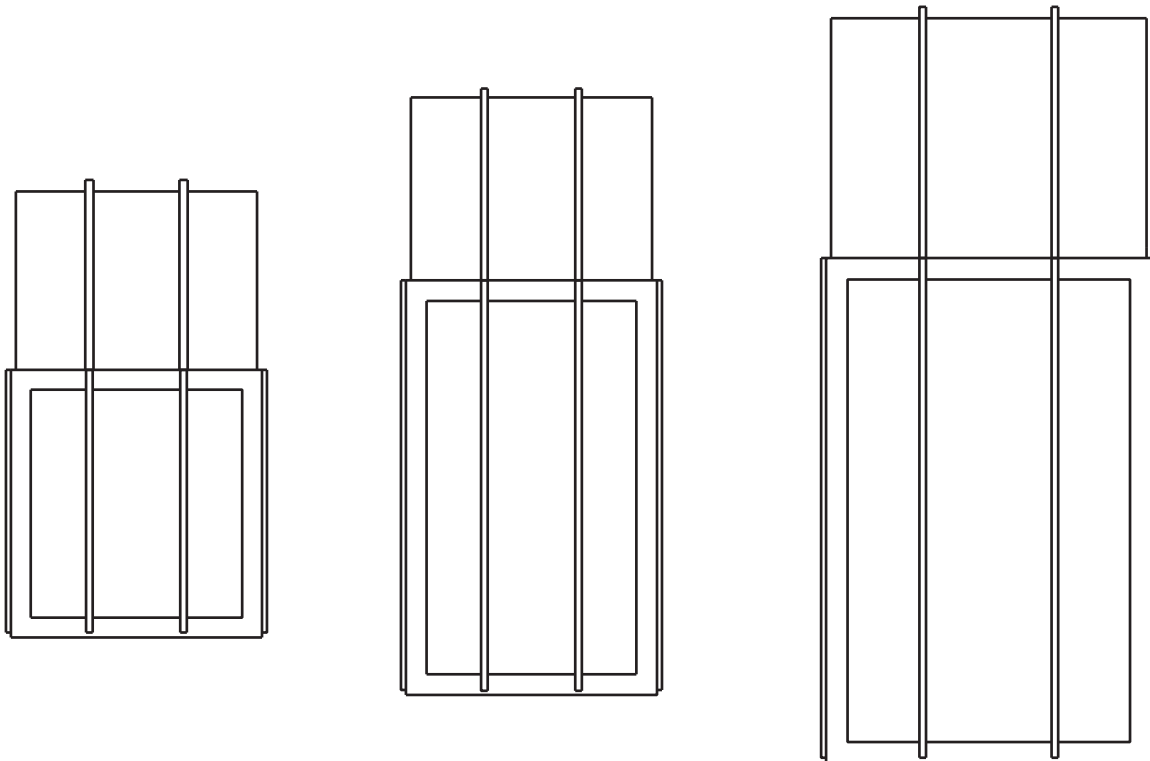

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

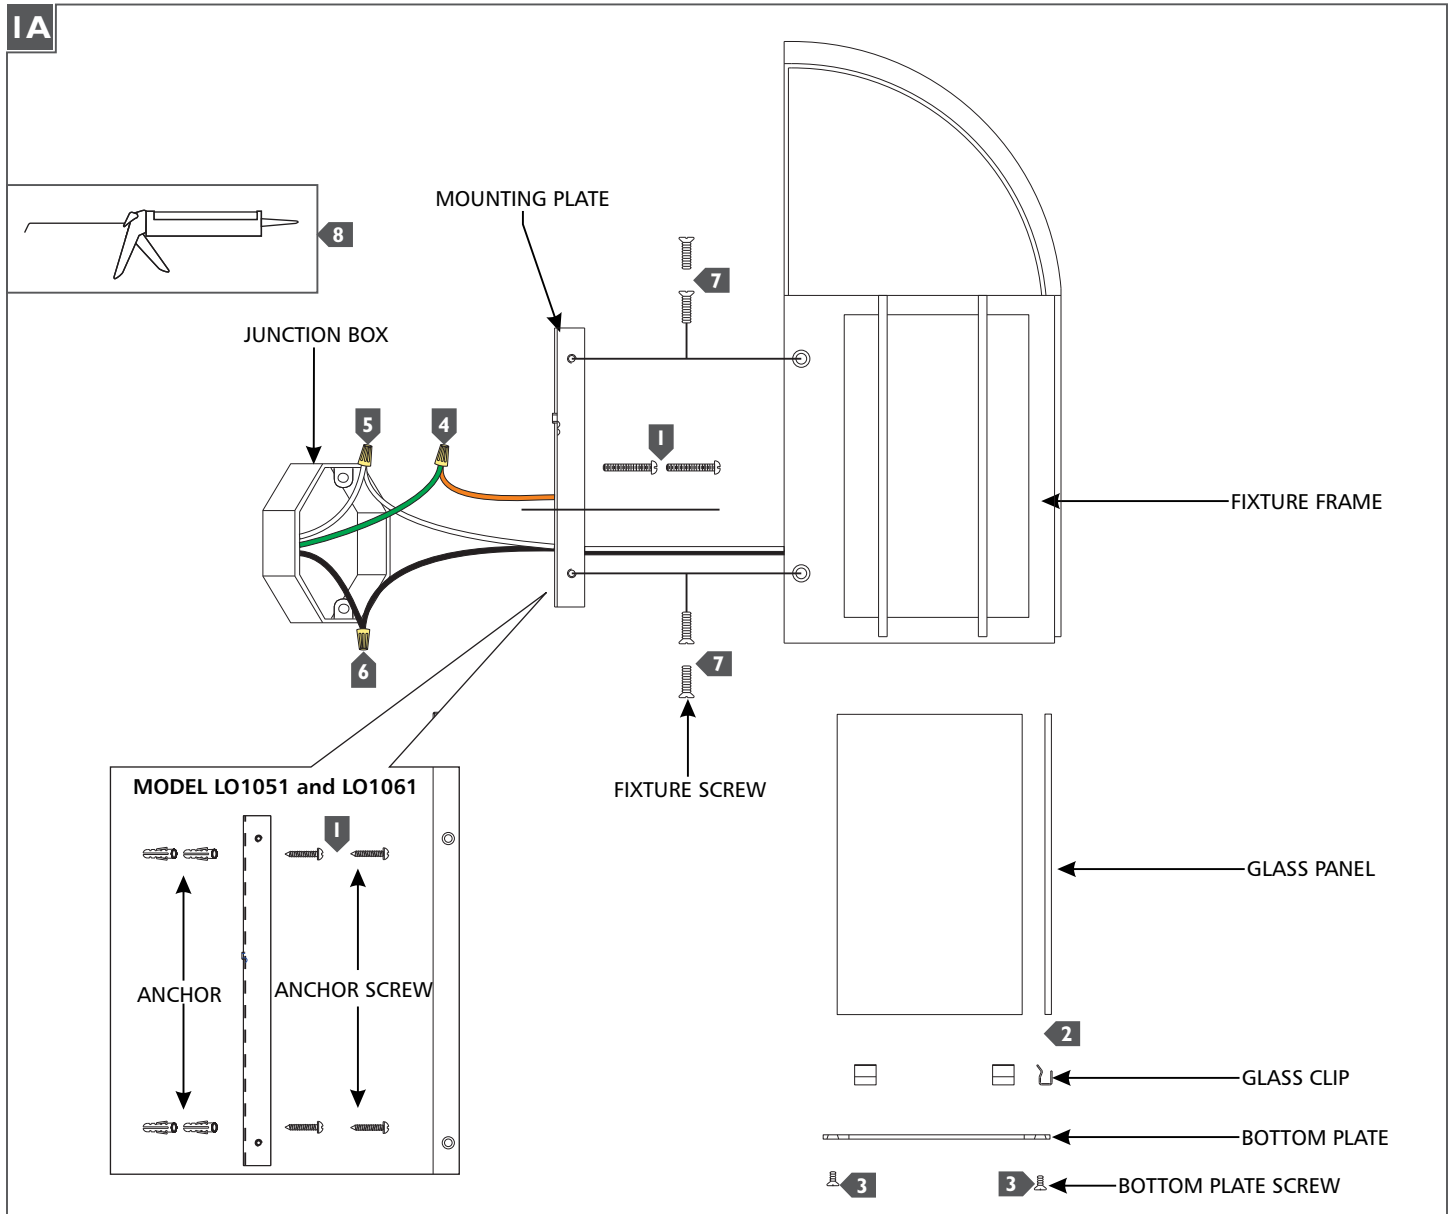

- 1** Secure the mounting plate to the junction box. NOTE: model LO1051 and LO1061 must be secured with anchors and anchor screws.
- 2** Install the glass panels into the fixture frame and secure them in place with the glass clips.
- 3** Install the bottom plate to the bottom of the fixture frame and secure it in place with the provided screws.
- 4** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 7** Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place using the fixture screws.
- 8** For wet locations, caulk around the base of the fixture with waterproof construction sealant.