



# CRYSTORAMA



Crystorama.com

LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #5019-EB-CL-MWP

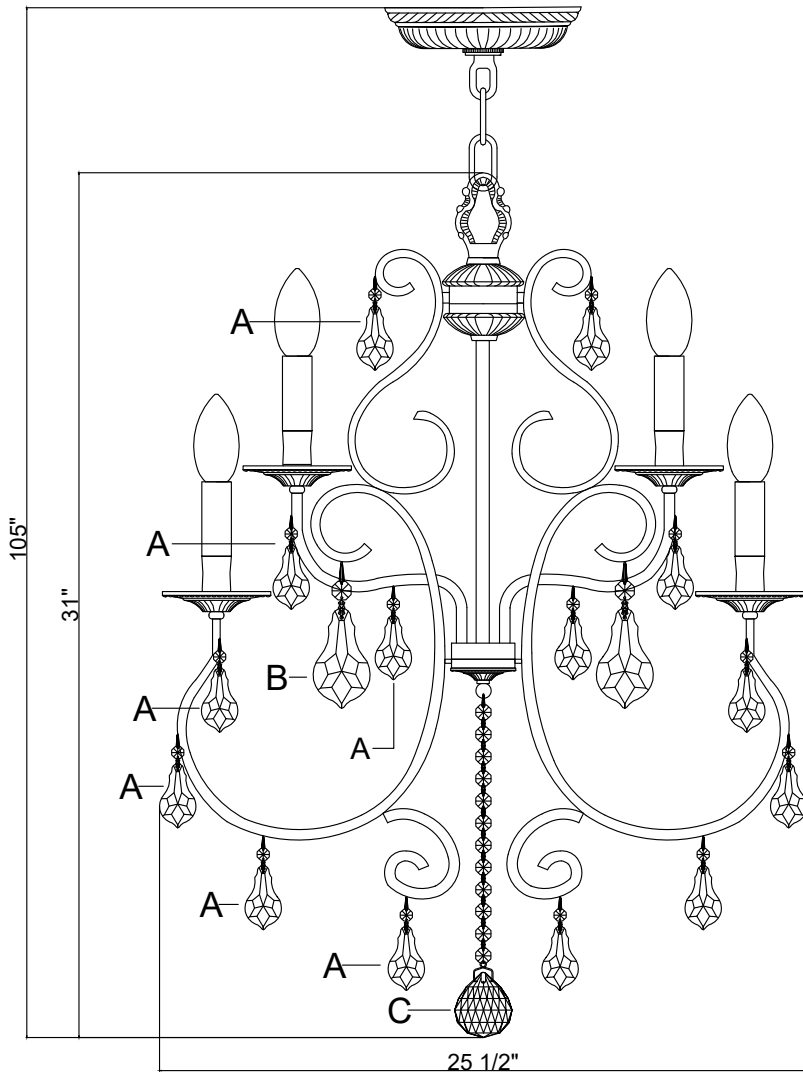

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 9- Candelabra Base Bulb  
40 Watts recommended 60 Watts Max.  
USE LED BULBS FOR EXTENDED USE


The fixture is Damp rated

### HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

1. Install the mounting bar onto the outlet box.
2. Spread the arms out equally. Place the distributor box cover-1 over the top of 26" curved arms. Make sure the slot fits over the arm.
3. Place the metal cover over the distributor box kit and secure with fixture loop.
4. Place the distributor box cover-2 over the bottom threaded nipple of the distributor box kit. Make sure the slot fits over the arm.
5. Place the bottom bobèche over the distributor box kit and secure with finial.
6. Decide the desired hanging height and adjust the chain to the correct length.
7. Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with thread and nut.
8. Place the candle sleeve and bobèche over the socket.
9. Dress the crystals as illustrated.

Spread the folded arms.

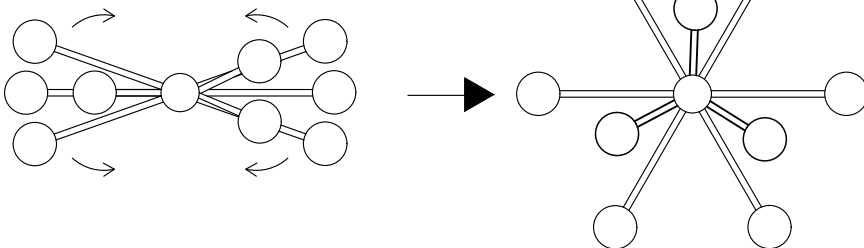

### Crystal Sets

- A. 36 Sets. (5)14mm + 63mm Gourd
- B. 6 Sets. (1)14mm + 76mm Gourd
- C. 1 Piece. (12)14mm + AS8-40mm Ball

**⚠ WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# CRYSTORAMA



Crystorama.com

LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #5019-EB-CL-MWP

### Part Number

#### Part Numbers

- A. (1)-Mounting hardware  
Mounting bar x1.  
Wire connector x2.  
Lock washer x1.  
Hex nut x1.  
Threaded Nipple x1.  
Screw x2.
- B. (1)-Canopy (W5 3/4"xH1 1/4")  
-XSN5013EBCAN5.75IN
- C. (1)-Collar Ring
- D. (1)-Collar Loop
- E. (1)-Chain(4mmx72")-XSN5016EBCHA4MM
- F. (1)-Fixture Loop
- G. (1)-Ø2 1/8" Meter Cover
- H. (1)-Distributor box cover-1 ; Ø2".
- I. (1)-Distributor box kit  
Threaded nipple.  
Distributor box-1 ; Ø2".  
Ø2 1/8" Metal cover.  
Center pipe ; H13 1/4".  
6"Center Arm x3.  
26"Curved Arm x6.  
Distributor box-2 ; Ø3 1/8"  
Threaded nipple.
- J. (9)-Metal candle sleeve; H2"  
-XSN5011EBMCDL2IN
- K. (9)-PVC candle Sleeve; H2"  
-XSN5011EBPCDL2IN
- L. (9)-Holder
- M. (9)-Bobèche ; Ø3 1/8"-XSN5011EBBOB3IN
- N. (1)-Distributor box cover-2 ; Ø3 1/8".
- O. (1)-Bottom Bobèche ; Ø3 1/8"  
-XSN5011EBBOB3IN
- P. (1)-Finial

