

A9000126-16-S

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Loosen the screw(17) that is near the cut end of the safety cable(16), Pull out the cut end from the hole of the sleeve, wrap the cable around a structural beam of your building. Finally, insert the cut end of the sleeve and secure it with screw.
- For further information, please refer to the instructions on the reverse side.
2. Secure the mounting plate (8) to the outlet box(1) with box screws(6) and wood screws (7)
3. Pull out the outlet wire and ground wire from the outlet box. Make wire connections with Wire Connector(2)
 - Black wire from light to Black wire (3) from power source.
 - White wire from light to White wire(4) from power source.
 - Loop the ground wire(5) to mounting plate (8) with a ground screw(9).
4. Attach the canopy(10) against ceiling, secure with the ball nut(11) onto the mounting screw.
5. Remove the cover (15) from the socket, insert G9 bulb (14) (not included) into socket. Then slide the crystal shade(13) up to the glass holder. Finally, use the cover(15) to secure them.

DO NOT USE BARE HANDS TO TOUCH THE BULB.

INSTALLATION IS NOW COMPLETE

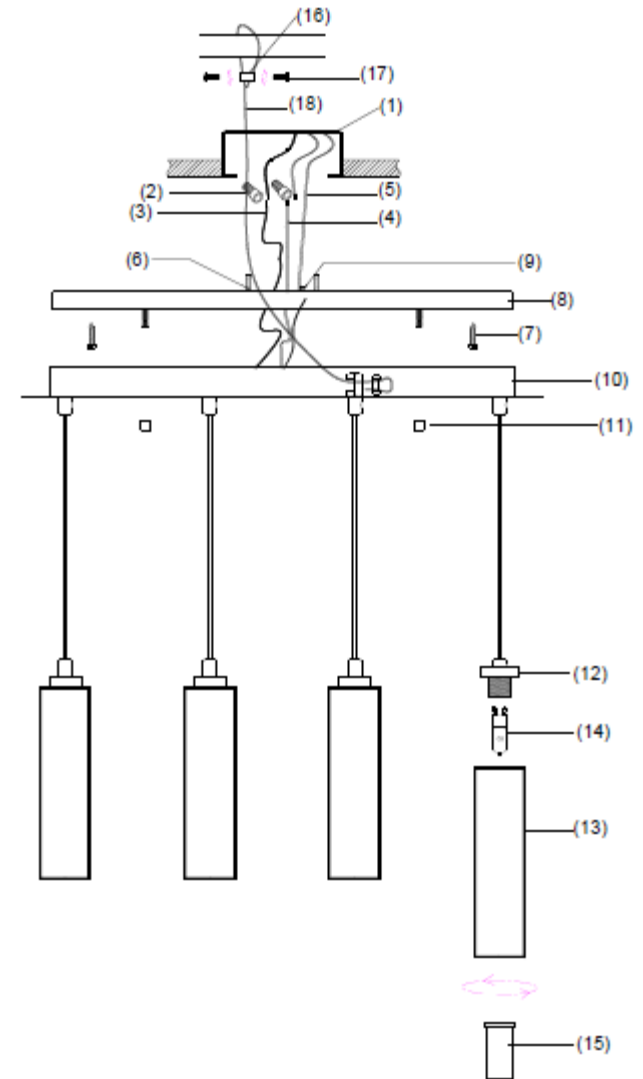

1. OUTLET BOX
2. WIRE CONNECTOR
3. BLACK WIRE
4. WHITE WIRE
5. GROUND WIRE
6. BOX SCREW
7. WOOD SCREW
8. MOUNTING PLATE
9. GROUND SCREW
10. CANOPY
11. BALL NUTS
12. GLASS HOLDER
13. K9 CRYSTAL
14. G9 BULB
15. COVER
16. SAFETY CABLE
17. SCREW



by Acclaim Lighting

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102

P: 866-845-5451 • F: 866-816-6165

E: service@acclaim-lighting.com • www.acclaim-lighting.com

INSTALLATION INSTRUCTIONS

For Safety Cable

Please read carefully and save these instructions, as you may need them at a later date.

INSTRUCTION

This fixture is provided with a safety cable. The safety cable provides a back up system for the fixture's frame and the installation hardware. It is essential that the safety cable be properly installed. The cable must be secured to a **structural beam** of the building, and not to the outlet box. The cable must be terminated with a **sleeve** specially sized for the cable per following the steps:

1. Insert enough cable through one side of the sleeve to form a large loop
2. Wrap the cable around the **structural beam** or **fixture ceiling pan**
3. Turn back the cut end and insert the cable into the opposite side of sleeve
4. Pull back on cable until desired loop size is obtained
5. Allow 1/8" of cable cut end to extend beyond end of sleeve.
6. Use two screws to make sure that it will not slip back into sleeve while hanging.

Refer to the figure for more detailed information.

Remark: Please make sure all hardware is properly tightened and that the cable is positioned clear of screws.

