


Assembly Instructions: 9808-OWS

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service,
please contact the place of

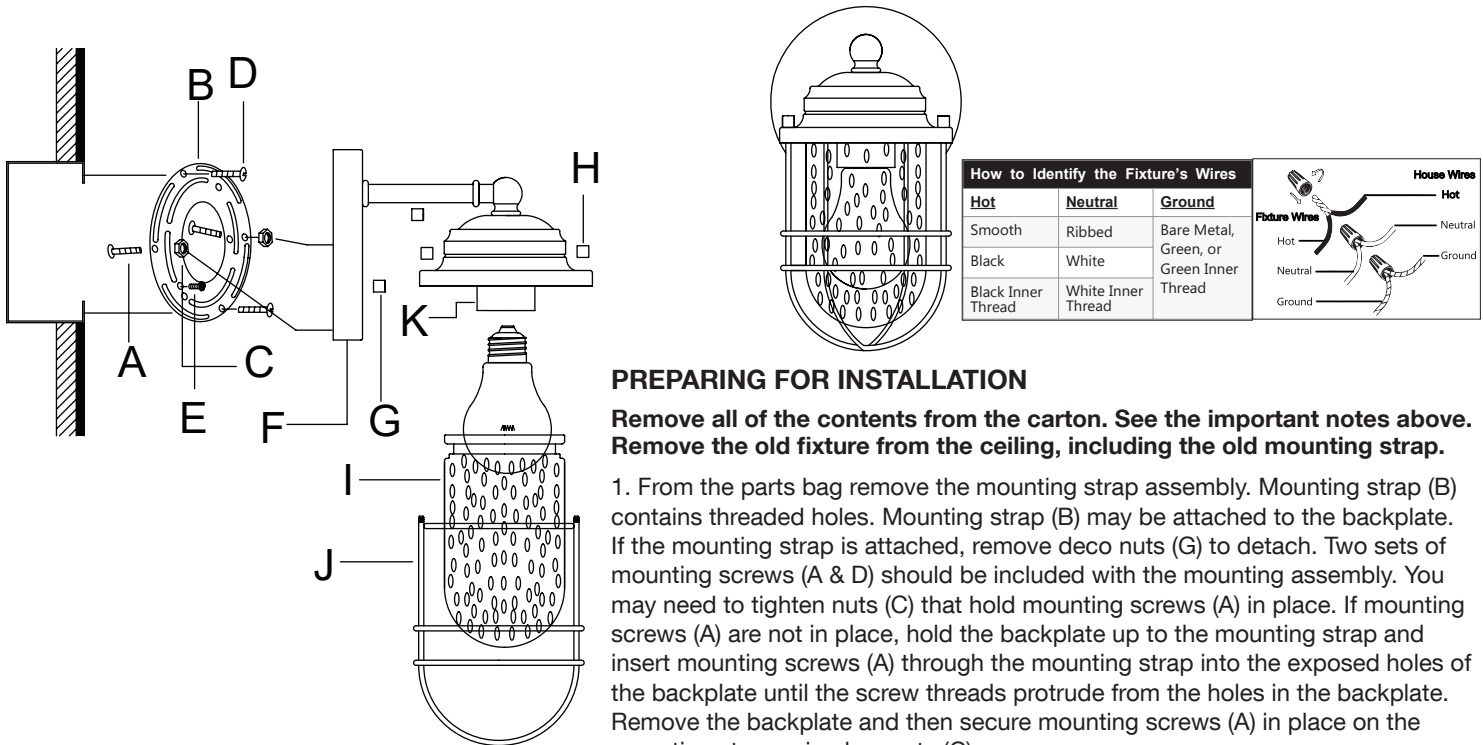

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Remove the old fixture from the ceiling, including the old mounting strap.

1. From the parts bag remove the mounting strap assembly. Mounting strap (B) contains threaded holes. Mounting strap (B) may be attached to the backplate. If the mounting strap is attached, remove deco nuts (G) to detach. Two sets of mounting screws (A & D) should be included with the mounting assembly. You may need to tighten nuts (C) that hold mounting screws (A) in place. If mounting screws (A) are not in place, hold the backplate up to the mounting strap and insert mounting screws (A) through the mounting strap into the exposed holes of the backplate until the screw threads protrude from the holes in the backplate. Remove the backplate and then secure mounting screws (A) in place on the mounting strap using hex nuts (C).
2. Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.
3. Pull house wires through the center of the mounting strap (B).

CONNECTING THE WIRES

4. Have an assistant support the weight of the fixture while completing the wiring. Cut away any excess wire leaving 8 to 10 inches of wire for installation. Attach the fixture's wires to the house wires which were pulled earlier from the junction box through the mounting strap (B). Connect black to black (transparent wire with black inner thread or smooth); white to white (transparent wire with white inner or ribbed); ground to ground (transparent wire with green inner thread, green, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

5. Place the fixture's backplate (F) over mounting strap (B) so that the holes in mounting strap (B) line up with the holes in backplate (F) and mounting screws (A) protrude from the holes in the backplate. Thread deco nuts (G) onto the exposed threads of mounting screws (A) until backplate (F) is snug against the wall.
6. Install a light bulb (not provided) into socket (K) in accordance with the fixture's specifications. Do not exceed the maximum wattage.
7. Install the glass shade (I) into the lamp body cup and turn the lock clockwise to tighten the glass shade(I), Slide metal cage (J) up to the bottom of the lamp body over the glass shade. Secure the metal cage in place with the remaining deco nuts (H).

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.