

# Instruction: LED WTK、WHK Tack Fixture –Exterminator Series

Model: WTK-LED20、WHK-LED20

## WARNING

**IMPORTANT: NEVER attempt any work without shutting off the electricity.**

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the “OFF” position and unscrew the fuse(s) or switch “OFF” the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the “OFF” position.

## CAUTION

- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction could invalidate the ETL/CETL listing of this fixture.

## AVERTISSEMENT

**IMPORTANT : Coupez l'électricité avant TOUTE manipulation.**

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux.
- Accédez au panneau central de disjoncteurs ou de fusibles de votre demeure et placez l'interrupteur principal en position d'arrêt («OFF »).
- Placez l'interrupteur mural en position d'arrêt (« OFF »).

## MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation ETL/CETL du luminaire.


## Overview:

Fixtures are designed for use on WAC Lighting's track systems.

LED Track Fixture	Track Systems
WTK-LED20 Series	WT Track ( Input: 120V )
WHK-LED20 Series	WHT Track ( Input: 277V )

## Installing on Track:

1. Make sure that the lock switch is in its unlock position and the circuit selection handle is in its off position. (See Figure 1)

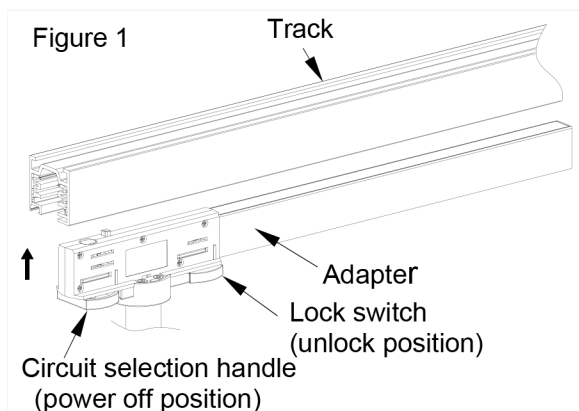


# Instruction: LED WTK、WHK Tack Fixture –Exterminator Series

## Model: WTK-LED20 、WHK-LED20


- Align the convexity bump on the adaptor with the groove/slot on the track (See Figure 2). Once aligned slide adaptor box into the track.

Figure 2

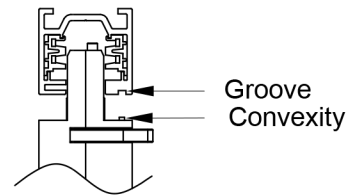


- To secure the fixture to the track turn the lock switch to its locked position. (See Figure 3)

Figure 3

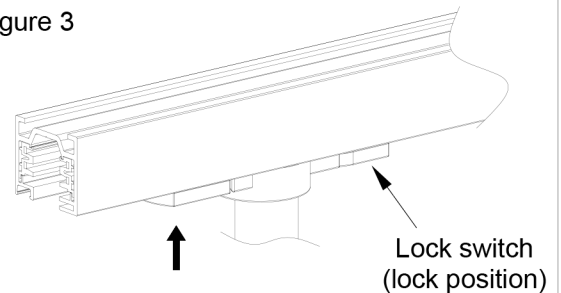

- Now, choose the circuit to which you would like the luminaire to be powered on and turn the circuit selection handle to that circuit 1 or 2. (See Figure 4)

Figure 4

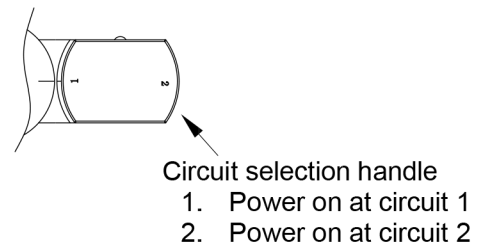

### Positioning the Fixture:

- After the light is on, rotate the luminaire's body horizontally or vertically to aim it properly. (See Figure 5)

### Fixture quality:

5 years product warranty.

For color with lamps: 2700K、3000K、3500K、4000K

WTK-LED20 Series Compatible dimmers:

LUTRON SELV-300P, LEVITON VPE04

Dimming range:10%-100%

Figure 5

