


LANDSCAPE 2023

HINKLEY

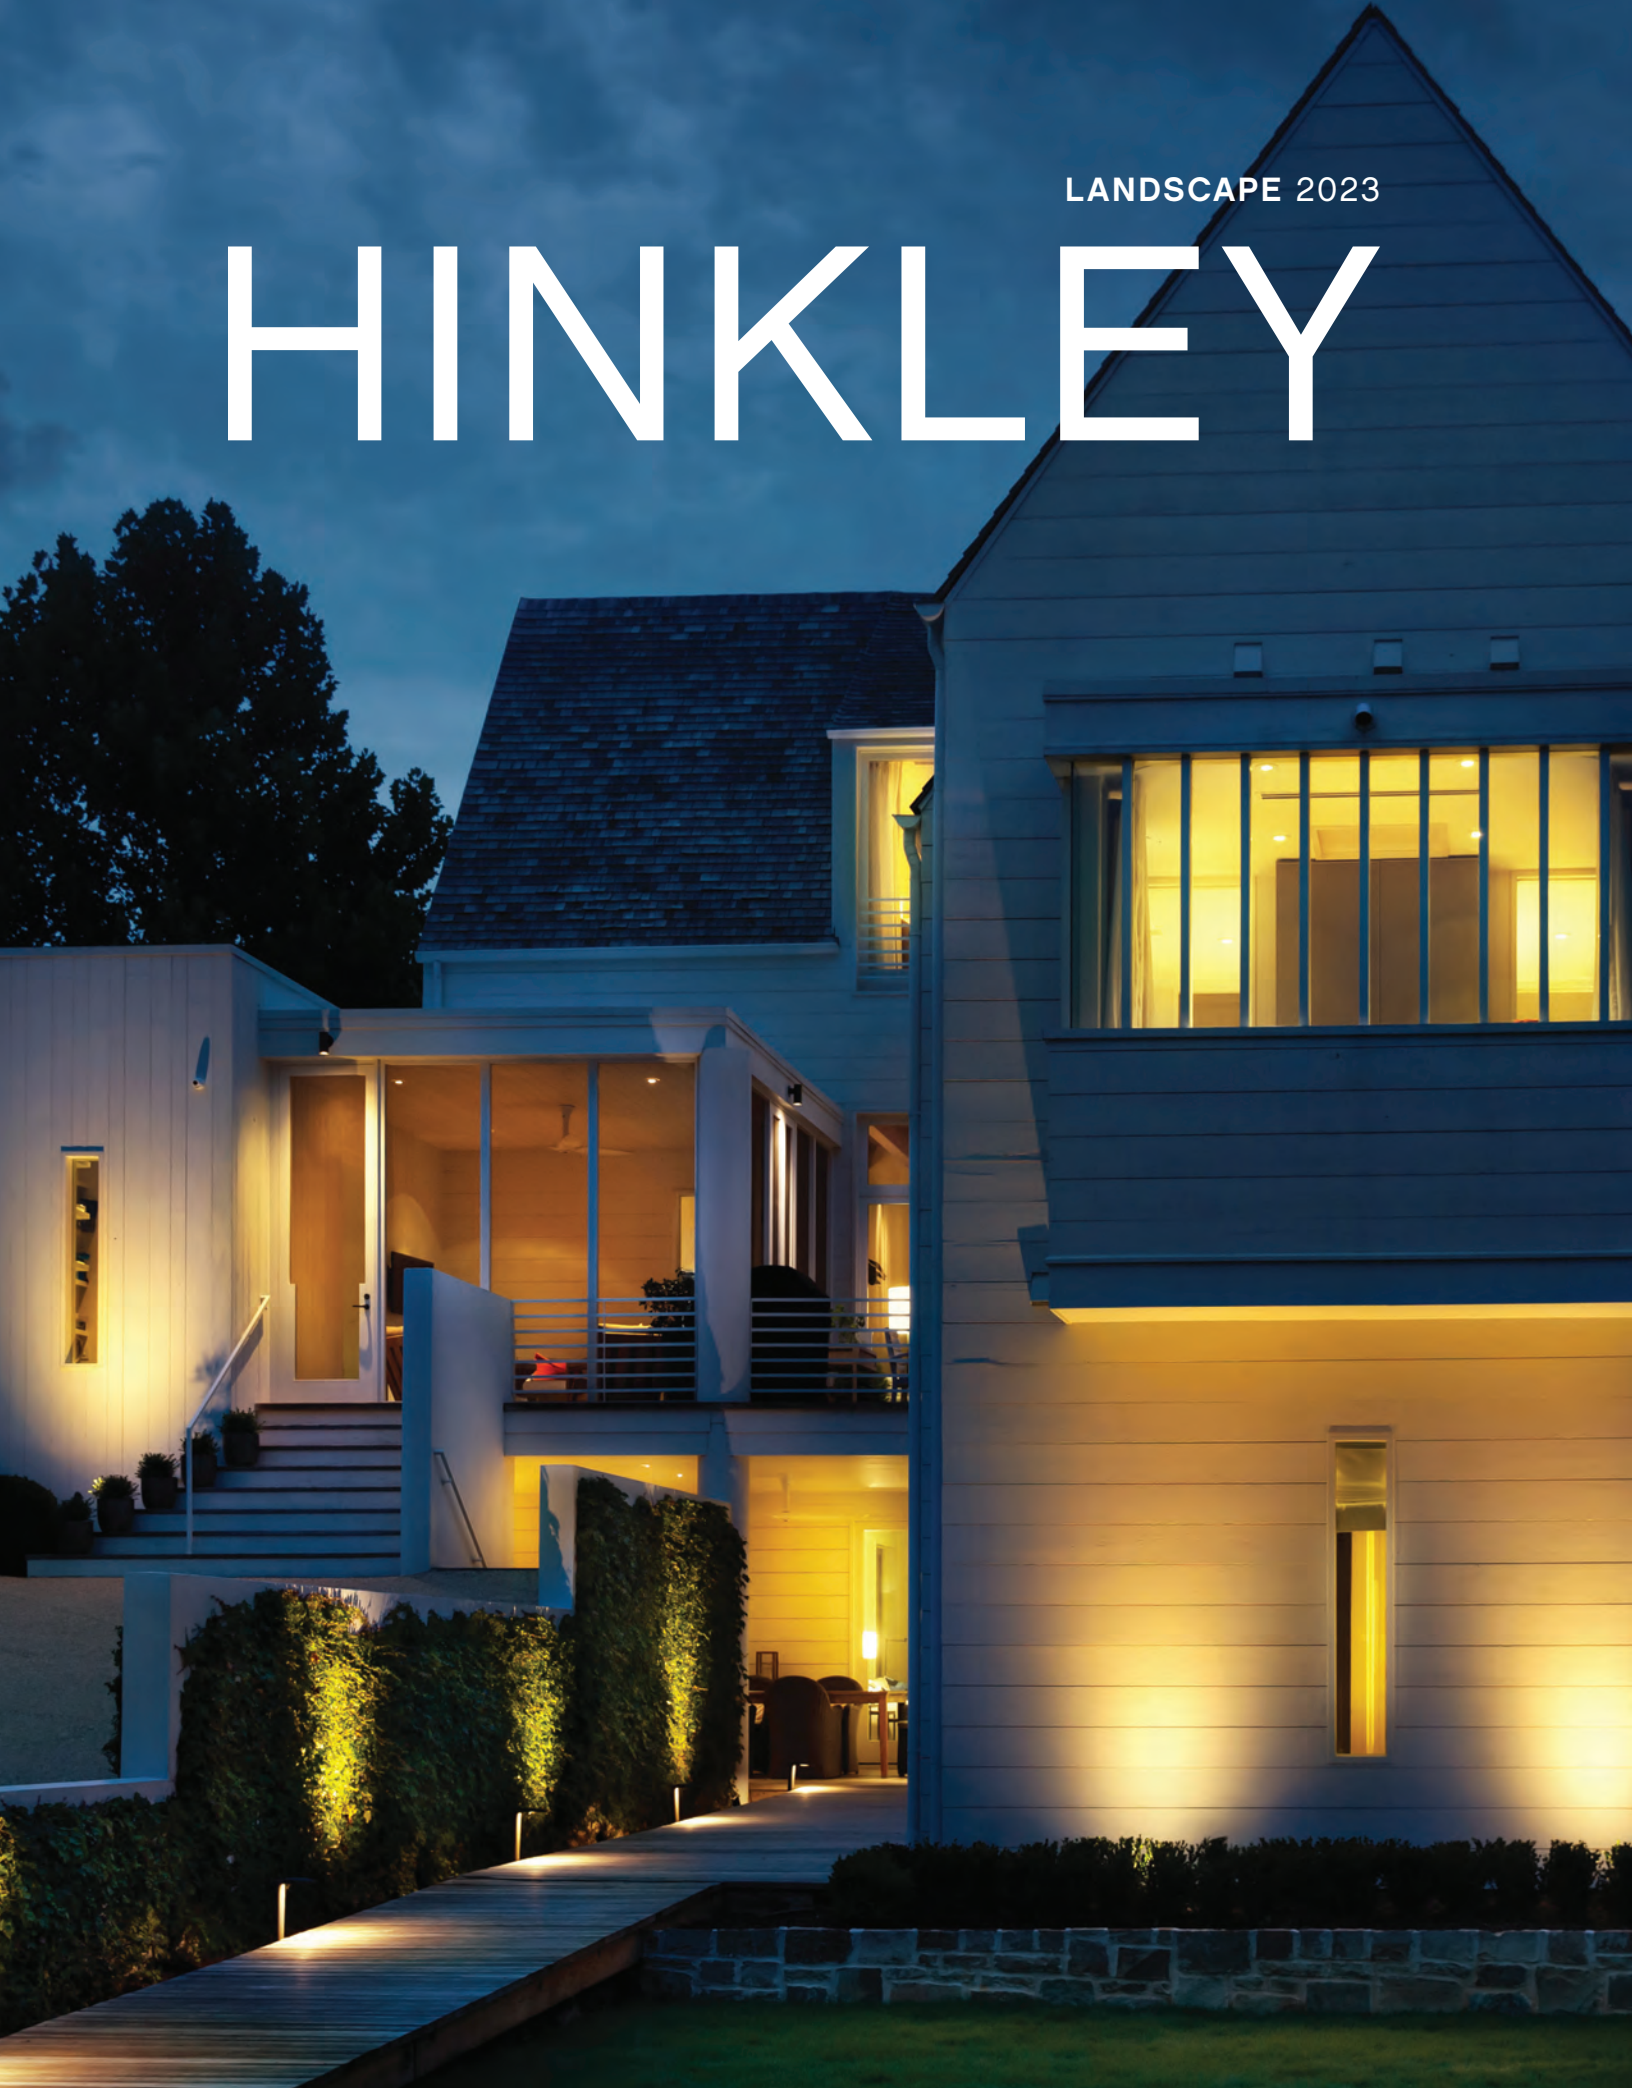

HINKLEY

THIS CATALOG INCLUDES HINKLEY'S FULL LINE OF
LANDSCAPE LIGHTING. FOR FANS, INTERIOR, BATH
AND OUTDOOR LIGHTING, SEE [HINKLEY.COM](https://www.hinkley.com)

HINKLEY, INC. | 2023

A photograph of a stone building with three arched doorways. The walls are made of rough-hewn stone and are partially covered in green ivy. Three large, black, lantern-style outdoor lights are mounted on the wall, each with a warm glow. In the foreground, there is a well-manicured lawn and a row of low, rounded bushes. Several small, black, cone-shaped ground lights are placed along the edge of the bushes. In the background, there are trees and a black metal fence.

life AGLOW[®]

WELCOME TO HINKLEY

HARDY ISLAND 16007 MZ-LL
TRELLIS 1435 RB

HI THERE, WE'RE HINKLEY

Welcome to the *family*

We're here to make your research process a snap, with our newest designs, featured collections, in-depth product details, curated styles, and endless inspiration throughout these pages and at hinkley.com.

Our easy-to-use site will guide you through every lighting and ceiling fan decision. We deliver the most helpful product features, specs, and tips at-a-glance for every project, as well as a quick connection to our elite network of retailers.

Once you've welcomed Hinkley into your home, stay connected with us. We know that sometimes things happen, and we want to answer any questions as quickly as possible.

Just head to hinkley.com/register - we're always here if you have a question, need some help, or want to chat about our products.

Discover lighting to fit your space

INSPIRATION AWAITS

Just like you, we've reconnected with our homes and appreciate more than ever how important these interior and exterior spaces are to our health, happiness and well-being.

We love seeing how you live and sharing ideas and inspiration with each other. Stay in the loop on all Hinkley happenings, from your favorite styles, the best (seriously) giveaways, helpful tips, our latest collabs, Team Hinkley shenanigans, and brand new design drops [@hinkleylighting](https://twitter.com/hinkleylighting)



#hinkleystyle



ATLANTIS 15014 SK-LL
SILO 13594 BK-LL

REX 1534 TK
NOUVELLE 2778 BLB




TABLE OF CONTENTS

Hinkley Landscape Lighting allows you to creatively illuminate all types of exterior environments and increase enjoyment of your favorite natural spaces throughout the evening hours. Explore all we have to offer: from inspiration to installation, we've got you covered.

Hi There, We're Hinkley	01	LOW VOLTAGE LUXURY LIGHTING	
Estate Series	06	Estate Series Hanging	112
Landscape Lighting Techniques	08	Estate Series Pier Mounts	116
Outdoor Living	09	Estate Series Post Mounts	114
Coordinate + Complement	12	Estate Series Wall Mounts	114
12V Design + Installation	13	Hanging	120
		Pier Mounts	117
		Post Mounts	115
		Wall Mounts	115
12 VOLT LANDSCAPE LIGHTING		ACCESSORIES	122
PATH + AREA LIGHTING	18	Bulbs	131
Bollards	48	Hinkley Home Automation App	124
Path Lights	20	LumaCORE™ Engines	136
ACCENT LIGHTING	54	Smart Landscape Wireless Control + Dimmer	126
Calder Twinkle Lights	85	Transformers	128
Flood Lights	80		
Hardy Island	78	120 VOLT LANDSCAPE LIGHTING	138
LumaCORE™ Flood Lights	60	Accessories	158
LumaCORE™ Spot Lights	59	Bollards	150
LumaCORE™ Well Lights	61	Brick + Step Lights	157
Sparta	65	LumaCORE™	142
Spot Lights	75	Luna Step Lights	152
Well Lights	81	Path Lights	148
DECK, STEP + PATIO LIGHTING	88	Spot + Lights	143
Brick Lights	104	Terrace Sign Lights	147
Deck Lights	102	Well Lights	146
Hardscape	92		
Luna Step Lights	101	Index	159
Nuvi Collection	89		
Sparta	106		
Taper Deck Lights	98		
Taper Step Lights	97		

ICON GUIDE

THROUGHOUT THIS CATALOG WE HAVE UTILIZED A VARIETY OF IMPORTANT ICONS TO ASSIST WITH YOUR LIGHTING SELECTIONS. THIS KEY DESCRIBES EACH ICON IN DETAIL FOR EASY REFERENCE.

-  **120 VOLT**
Indicates a line voltage fixture that is able to accommodate lamps with a higher wattage and light output. Ideal for commercial and public spaces.
-  **ADA COMPLIANT**
Indicates fixtures that adhere to the standards and guidelines listed by the Americans with Disabilities Act.
-  **COASTAL ELEMENTS**
Versatile designs offering maximum durability in harsh climates.
-  **COASTAL SERIES**
Coastal Series fixtures are constructed from sturdy copper and brass. Designed for harsh environments.
-  **HARDY ISLAND**
Fixture is constructed from heavy duty solid cast brass and features a weathered brass finish. Designed for harsh environments.
-  **INTEGRATED LED**
Each energy-efficient fixture is equipped with a fully integrated LED panel and built-in driver.
-  **OPEN AIR**
Chic designs rated for use in both interior and exterior spaces.

WEYMOUTH PIER MOUNT
20017 BK-LV





ESTATE

S E R I E S

The Estate Series boasts a breadth of fixtures defined by coordinating composition, enduring architecture, and time-honored craftsmanship. Designed to meet the needs of expansive properties, these collections have a variety of complementary styles and sizes to light up your landscape while coordinating with other outdoor fixtures.

Highlighting a wide range of fixtures with scaled-up elements, these collections emphasize the features needed to balance grand outdoor spaces while creating a distinguished and welcoming environment:

- Breadth of Fixture Styles
- Complementary Finishes
- Fine Rivet Details
- Traditional Textures

ALFORD PLACE	114, 119	REVERE	116
BEACON HILL	116	RALEY	22, 114
EDGEWATER	114	REPUBLIC	20, 114, 116 + 119
HARBOR	23, 114, 116 + 119	TRELLIS	116
LAKEHOUSE	21, 114 + 119	WEYMOUTH	116
PORTER	114		

TO EXPLORE THE FULL SERIES, VISIT [HINKLEY.COM](https://www.hinkley.com)

LANDSCAPE LIGHTING TECHNIQUES

Every need-to-know method for lighting up the night

SILHOUETTING

Also called backlighting, silhouetting is used to dramatize an interesting shaped object.

CREATING THIS EFFECT : A spot light is placed between the tree and the front of the home. The spot light is aimed at the front of the home creating a dramatic silhouette of the tree.



WALL WASHING

Wall washing is a technique that refers to the general illumination of a wall or surface.

CREATING THIS EFFECT : Spot lights are placed along the front of the home to create a soft wash of light.



SHADOWING

Shadowing is an effect created by placing a light source in front of an object and projecting a shadow onto a surface behind the object.

CREATING THIS EFFECT : Spot lights are placed directly in front of the tall bushes, producing shadows which are projected on the home's face, creating an interesting and inviting façade.



UPLIGHTING

Uplighting is illuminating an area, surface or object from below to create a focal point in the landscape.

CREATING THIS EFFECT : A spot light is aimed at the tree in the foreground while the front of the home remains relatively dark.





GRAZING

Grazing emphasizes a textured surface (such as a tree trunk, a stone wall, climbing ivy, etc.) by placing a light source within one foot of that surface and aiming the light beam parallel to that surface.

CREATING THIS EFFECT : Spot lights are placed beneath each stone pillar to create dimension, complementing the home's entryway.

DECK + PATIO LIGHTING

Step, brick and hardscape lighting can be used in masonry and wood constructions. These fixtures are specifically designed to provide safety and accent lighting while creating a warm atmosphere.

CREATING THIS EFFECT : A surface-mounted deck sconce is placed on the wall above each step to illuminate a safe entryway to the deck. A hardscape fixture under the bench, coupled with deck sconces mounted to the corner posts create a soft glow.



INDICATOR LIGHTING

Indicator lighting has numerous advantages to enhancing hard-to-light areas like driveways after dark. These heavy-duty fixtures are a low-profile, effective and modern solution.

CREATING THIS EFFECT : By installing recessed indicator lights into the concrete, they are safely anchored in place and can be added onto any existing low voltage landscape lighting system or installed with a new system.



STEP LIGHTING

Step and brick lights can be used in masonry and wood constructions. These fixtures are designed to safely illuminate stairways and walkways.

CREATING THIS EFFECT : The steps are gently illuminated leading up to the doorway to ensure safety.



PATH LIGHTING

Path and area lighting is used to enhance dynamic landscaping elements such as flower beds, shrubbery and borders while safely illuminating pathways.

CREATING THIS EFFECT : Path lights are staggered around the walkway to create pools of light that illuminate a safe passage to the home's entrance.



OUTDOOR LIVING

[FOLD OUT FOR A FULL VIEW >](#)

1 SPOT LIGHTS

Spot lights are the go-to fixture to highlight elements of your landscape that add the most visual appeal, such as foliage, trees and architectural elements. Hinkley offers a wide range of spot lights to fit any need.

2 PIER + POST MOUNT LANTERNS

Available in both 12v and 120v, pier mounts are incredibly versatile and designed to deliver the benefits of wall mount lanterns. When added to the entrance of driveways, decks or pathways, their presence transforms routine, high-traffic areas to a sophisticated, welcoming and well-lit environment. Many of Hinkley's pier mounts coordinate with hanging or wall-mounted lanterns, as well as path lighting, to create a cohesive property.

3 LUNA STEP LIGHTS

Available in 12V and 120V and a variety of colors (both double and single gang), the Luna Step Light is a versatile way to safely illuminate areas of foot traffic both indoors and out. Also fully dimmable, these fixtures allow customization of light output with only 4w of power consumption.

4 OUTDOOR PENDANTS + CHANDELIERS

Available in both 12v and 120v, exterior pendants and hanging lanterns can be used as a lighting source to illuminate and accent an outdoor dining space. A general guideline to follow is the same as interior pendants, which is for the bottom of the fixture to sit 28"-34" above the table.

5 OUTDOOR LANTERNS

Available in both 12v and 120v, lanterns mounted at a point of entry to the home provide safety, security, and a welcoming decorative element.

ONE LANTERN should measure about 1/3 the height of your door.

TWO LANTERNS should measure about 1/4 the height of the door. In all cases, the center of the light source should rest about 66" above the threshold.

6 OUTDOOR FANS

Wet-rated fans are a must in any area exposed to the elements. Spaces like covered porches and sunrooms, where condensation or high humidity are factors, also benefit from outdoor fans. Hinkley Fans allow customization on both the aesthetic and operational elements to jazz up the look and usability for the coolest solution to outdoor living spaces.

7 PATH LIGHTING

Path lighting is the perfect way to add style and safety to a walkway. Lights should be placed about 6' apart from one another, and staggered on either side of the path. Consider the light output of your fixtures to determine spacing that keeps the light from overlapping.

8 TRANSFORMER

Transformers convert your 120-volt household current to 12-volt. Calculate the total lamp wattage, or VA for LED, that your system requires and choose a transformer powerful enough to handle the total wattage/VA with extra capacity.

EXTERIOR INSTALLATION on the side or back of the home must be mounted 12" from the ground next to an outlet.

INTERIOR INSTALLATION such as in a basement, garage or shed must be listed for that application. UL code also requires an additional plate to guard against fire and conduit must be used when running wiring through an interior wall.

9 SHADOWING

Shadowing is an effect created by placing a light source, often a spot light, in front of an object and projecting a shadow onto a surface behind the object, such as the shadow of a tree onto a home's façade.



A COMPLETE GUIDE TO PLANNING AND PLACING OUTDOOR LIGHTING FIXTURES TO ACCENT YOUR PROPERTY AND HIGHLIGHT YOUR HOME.

1
SPOT LIGHTS
Accent Lighting
Pages 59, 75

2
PIER + POST MOUNT LANTERNS
Pier Mounts, pages 116, 117 + Post Mounts, pages 114, 115
For more styles, visit Hinkley.com

3
LUNA STEP LIGHTS
Pages 101, 150

4
OUTDOOR PENDANTS + CHANDELIERS
Pages 119, 120
For more styles, visit Hinkley.com

5
OUTDOOR LANTERNS
Pages 114, 115
For more styles, visit Hinkley.com

6
OUTDOOR FANS
For all styles,
visit Hinkley.com

7
PATH LIGHTING
Pages 18, 144

8
TRANSFORMERS
Page 128

9
SHADOWING
Landscape Lighting
Techniques, Page 8

WALK RIGHT UP

LIGHTING THE WAY TO SAFETY

In addition to providing a luminous glow to the rustic outdoors, exterior lighting is often installed to increase safety outside the home. Let's shed some light on how to increase safety with hardscape and pathway lights!



HARDSCAPE LIGHTING



PATH LIGHTING

Hardscape lighting for deck, step and patio applications are specifically designed with safety in mind, and can be installed into masonry and wood constructions. For example, to illuminate stairs leading up to an entry way, a surface mounted hardscape light, such as Hinkley's Nuvi, can be placed under each step.

Path lighting is used in a variety of diverse applications, but its most beneficial effect is safety. For the best results, stagger path lights to create pools of light that illuminate walkways, such as paths leading up to the front door. Path lighting can also enhance dynamic landscaping elements such as flower beds and shrubbery.

BONUS! Here, the Hardy Island path lights and Republic lantern provide both effects – safety and charm.

F.Y.I. SAFETY LIGHTING & SECURITY LIGHTING ARE NOT THE SAME, ALTHOUGH THE TWO SHOULD WORK IN UNISON TO PROVIDE ULTIMATE PROTECTION FOR THE HOME.

HIGH FIVE

Landscape lighting is fundamental for creating a perfectly curated property, but the benefits are multi-dimensional, providing enhancements beyond simple illumination.


LET'S TAKE A LOOK AT THE TOP 5 ADVANTAGES OF LIGHTING UP YOUR LANDSCAPE:



FLEXIBILITY



INCREASED SECURITY

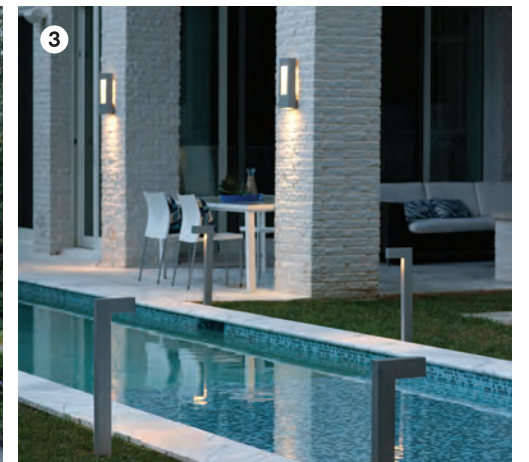

EXTEND YOUR LIVING SPACE



ECO-EFFICIENCY



IMPROVED HOME VALUE

- 1 FLEXIBILITY:** You can start slowly and gradually add in more lighting features as your time, budget or exterior space allow—it's all in your hands!
- 2 INCREASED SECURITY:** Eliminate the dark areas of your home's exterior for added safety.
- 3 EXTEND YOUR LIVING SPACE:** Crafting a well-lit outdoor living area creates a multi-dimensional home that can be enjoyed day and night.
- 4 ECO-EFFICIENCY:** LED technology is the backbone of any lighting plan and will provide long-term cost-savings and almost zero maintenance.
- 5 IMPROVED HOME VALUE:** Well-designed landscape lighting will reinforce aesthetic appeal and make your home look more captivating.



TALK OF THE BLOCK

Hinkley's outdoor product experts meticulously monitor building trends and then design and pair styles to create a wide variety of matching path lights and lanterns.

SATURN PATH LIGHT 1579 SS-LL
SATURN POST MOUNT 1901 SS-LV

COORDINATE + COMPLEMENT

To help you complete your lighting vision in style, Hinkley offers a wide variety of outdoor lantern families that coordinate with our landscape lighting designs.

For more details see Hinkley's outdoor catalog or visit us at hinkley.com

ATLANTIS™

ATLANTIS PATH LIGHTS, PAGE 25;
ATLANTIS BOLLARDS, PAGE 48
TO SEE ALL ATLANTIS OUTDOOR
FIXTURES, SEE HINKLEY.COM



FOUNDRY™

FOUNDRY PATH LIGHTS, PAGE 33
TO SEE ALL FOUNDRY OUTDOOR
FIXTURES, SEE HINKLEY.COM



ATWELL™

ATWELL PATH LIGHT, PAGE 33
TO SEE ALL ATWELL OUTDOOR
FIXTURES, SEE HINKLEY.COM



FREEPORT™

FREEPORT PATH LIGHTS, PAGE 30
TO SEE ALL FREEPORT OUTDOOR
FIXTURES, SEE HINKLEY.COM



CARSON™

CARSON PATH LIGHT, PAGE 36
TO SEE ALL CARSON OUTDOOR
FIXTURES, SEE HINKLEY.COM



HARBOR™

HARBOR PATH LIGHTS, PAGE 23
TO SEE ALL HARBOR OUTDOOR
FIXTURES, SEE HINKLEY.COM



LUNA™

LUNA STEP LIGHTS, PAGE 101
TO SEE ALL LUNA OUTDOOR
FIXTURES, SEE HINKLEY.COM




SATURN™

SATURN PATH LIGHTS, PAGE 29
TO SEE ALL SATURN OUTDOOR
FIXTURES, SEE HINKLEY.COM



PLANTATION™

PLANTATION PATH LIGHT, PAGE 35
TO SEE ALL PLANTATION OUTDOOR
FIXTURES, SEE HINKLEY.COM

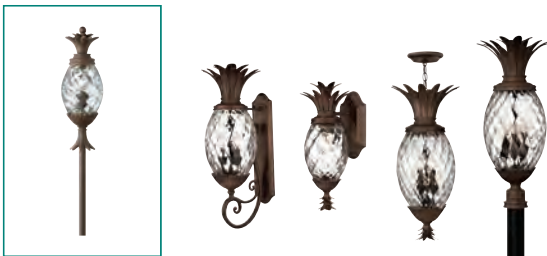

SHELTER™

SHELTER PATH LIGHTS, PAGE 35;
SHELTER BOLLARD, PAGE 52
TO SEE ALL SHELTER OUTDOOR
FIXTURES, SEE HINKLEY.COM




RALEY™

RALEY PATH LIGHT, PAGE 22
TO SEE ALL RALEY OUTDOOR
FIXTURES, SEE HINKLEY.COM



TAPER™

TAPER DECK + STEP LIGHTS, PAGE 97;
TAPER BOLLARDS, PAGE 151
TO SEE ALL TAPER OUTDOOR
FIXTURES, SEE HINKLEY.COM

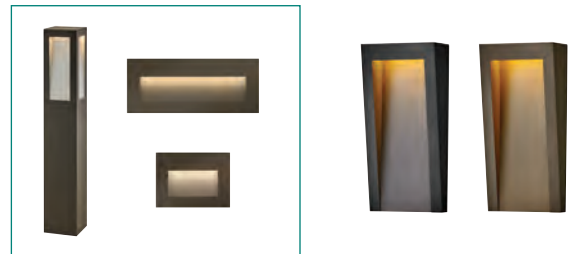

MAKE A COHESIVE STYLE STATEMENT

SEE HINKLEY'S FULL LINE OUTDOOR CATALOG
FOR COORDINATING OUTDOOR LIGHTING



12V LED LOW VOLTAGE DESIGN + INSTALLATION

STEP 1: MAKE A PLAN

What do you want to light? Pick favorite trees, interesting plants, fountains, statues or other attractive architectural elements. These items will be the focus of your lighting plan. Think about how you use the property. Are there areas you would like to illuminate for work, recreation or entertaining? Think about areas in which added light would enhance safety, such as steps or a wall around the side of your home.

HELPFUL PLANNING TIP

DON'T MISS THE LANDSCAPE LIGHTING TECHNIQUES ON PAGES 7-8 TO DETERMINE THE BEST METHODS FOR HIGHLIGHTING YOUR HOME'S EXTERIOR.



STEP 2: PREPARE YOUR EQUIPMENT

LOW VOLTAGE LED SYSTEMS

Most residential LED landscape lighting is done with 12-volt distribution. The system consists of a central transformer, weatherproof cable and low voltage LED fixtures and accessories.

LED FIXTURES

Decide on what fixtures you will be using as part of your complete lighting plan. Choose styles you like and select the appropriate LED WATTAGE for the application.

TRANSFORMERS

Transformers convert your 120-volt household current to 12-volt. Outdoor transformers can be installed on the side of your house and plug into an exterior rated outlet. They must mount at least 12" above the ground.

Transformers used indoors (such as in a garage or basement) must be listed for that application. For indoor use, UL requires conduit be used when running wiring through the wall. Calculate the total volt amperage (VA) your system requires. Then choose a transformer powerful enough to handle the total VA and still have some extra capacity if fixtures will be added at a later time.


CABLE

12-volt LED fixtures take power from a weatherproof, flexible 2-wire cable that can be used above or below ground and generally does not need to be housed in conduit or buried as deep as 120-volt wiring. 12AWG cable is minimum gauge recommended for LED installations. Measure the distance from the last fixture on the run to the transformer to calculate the amount of cable needed. Add 1-2 feet of cable per fixture to allow for repositioning.

STEP 3: WIRING YOUR SYSTEM

CABLE FIXTURE AND LAYOUT

If your lighting plan requires more than one transformer, you will need to divide the fixtures into groups or zones. To do so, consider the many areas of your property and how they are used. You may want all of the front yard lighting on one transformer, patio and deck lighting on another transformer, etc. The location of your electrical outlets will also help you to determine how to group the fixtures.

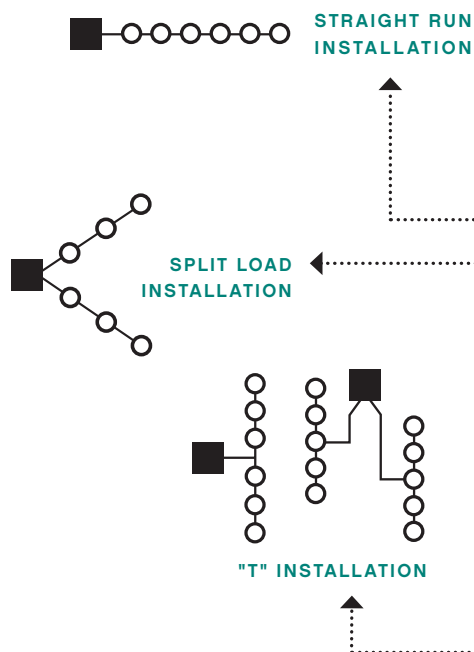

The pictured diagrams will help you wire your system. The black box represents the transformer.

STRAIGHT RUN INSTALLATION

Fixtures run in sequence directly from the transformer.

SPLIT LOAD INSTALLATION

With a Split Load installation, fixtures run in two or more directions from the transformer. Locate the transformer in the center of the run and connect wires to the transformer as you would when using straight run installation.

"T" INSTALLATION

A "T" installation allows more equal distribution of power to the center of the run, or to the run some distance away. For lengthy runs, use 8 or 10 AWG cable to split. Use 12 AWG cable to cross the "T" between fixtures.

6 fixtures x 2.1 W each =
12.6 W total
(ACTUAL ENERGY CONSUMED)

6 fixtures x 3.2 VA each =
19.2 VA total
(MINIMUM TRANSFORMER REQUIRED)

MINIMAL VOLTAGE DROP WITH LED

LED fixtures use less amperage than incandescent, therefore more fixtures can be used in a single cable run as compared to incandescent. Each fixture has a built-in durable driver circuit that accepts a wider input voltage range (10VAC-15VAC) thus eliminating the common voltage-drop problems experienced with incandescent systems. Most fixtures can be wired in straight run installations eliminating the need to create zones or split loads. The driver in each fixture will regulate the input voltage and properly power the LED.

VA (VOLT-AMPS) & W (WATTAGE)

All LED fixtures are measured in wattage (the actual electric consumed by the LED) and volt-amps VA (the power supply required to operate the LED). LED drivers convert the 12V alternating current (AC) to direct current (DC) to power the LED chip(s). This additional power to change the current is measured as volt-amps (VA) for each fixture. The VA indicates the power supply or transformer requirement you will need to operate the LEDs. To properly size your transformer, add up the VA for all fixtures on the system. To calculate your energy cost, add up the measured wattage rating of each LED.

FOR FURTHER INSTRUCTIONS ON FIXTURE CONNECTION, MOUNTING AND ACCESSORIES, FOLLOW HINKLEY'S INCANDESCENT INSTALLATION INSTRUCTIONS FOUND ON PAGES 15-16.



STEP 3: WIRING YOUR SYSTEM (CONTINUED)

CABLE FIXTURE AND LAYOUT

If your lighting plan requires more than one transformer, you will need to divide the fixtures into groups or zones. To do so, consider the many areas of your property and how they are used. You may want all of the front yard lighting on one transformer, patio and deck lighting on another transformer, etc. The location of your electrical outlets will also help you to determine how to group the fixtures.

MAXIMUM CABLE LENGTH PER TOTAL FIXTURE WATTS/VA							
Cable Size	50w/VA	75w/VA	100w/VA	150w/VA	200w/VA	250w/VA	300w/VA
12-2	300'	200'	150'	100'	75'	60'	—
10-2	475'	318'	240'	160'	120'	100'	80'
8-2	750'	506'	380'	250'	190'	150'	125'

VOLTAGE DROP

Excessive voltage drop occurs when too much wattage is placed on a cable that is too long or too small for the load. Voltage drop causes lamps furthest from the transformer to be dimmer than those near the transformer.

To help minimize voltage drop among each group of fixtures, use the following information to assist you:

Total Watts = sum of the incandescent wattage on a single run of wire.

Volt Amps = sum of the LED VA on a single run of wire.

Cable Length = length of cable run (feet) from the transformer to the last fixture on that run.

Cable Constant = thickness of copper wire. The thicker the wire, the lower the conductive resistance, resulting in a lower drop in voltage.

THE CABLE CONSTANT IS BASED ON WIRE SIZE. REMEMBER THAT LARGER WIRES HAVE LOWER AWG SIZES.

CABLE CONSTANT	
Cable	Constant
18 AWG	1,380v
16 AWG	2,200v
14 AWG	3,500v
12 AWG	7,500v
10 AWG	11,920v
8 AWG	18,960v

CALCULATING VOLTAGE DROP

You can calculate voltage drop in volts using the formula below. It also shows the relationship of wattage/VA, run length and two-conductor cable size (given by the cable constant). Adjust lamp wattage/VA, number of fixtures per run, or the length of the run to maintain the right relationship. Example: (3) 50w fixtures on a 75 ft. run using 12 gauge wire.

.....
↓

$$\text{VOLTAGE DROP} = \frac{\text{Total Watts/VA} \times \text{Cable Length}}{\text{Cable Constant}} \times 2$$

.....

EXAMPLE:

$$\text{VOLTAGE DROP} = \frac{150\text{w} \times 75'}{7500 \text{ (12 AWG Cable Constant)}} \times 2$$


.....
↓

Then, subtract the voltage drop from transformer output to operate in desired range:

**15 VOLT TAP - 3 (VOLTAGE DROP) =
12 (ACTUAL VOLTAGE)**

Voltage should not drop below 10.8 volts. In this case you should choose higher outputs to keep voltage in desired range of 11.2 volts-11.6 volts.

Lighting fixtures will generate heat. To avoid excessive heat be sure to keep all lamps clear of dirt and debris. Input voltage at the lamp on low voltage fixtures should never exceed 12 volts.

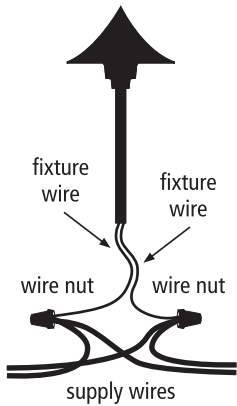

FIXTURE CONNECTION

Hinkley low voltage fixtures come standard with a connection kit, (2) wire nuts and silicone caulk. Fixtures should be attached by splicing them into main supply cable. Wire nuts should be filled with silicone. Twist the wires, then screw on the wire nut. Wrap with electrical tape. Bury any extra wire at the base of fixture to allow for relocation or adjustment.

After wiring your lighting plan, turn the transformer on and check the lamp voltage at each fixture.

MOUNTING

Hinkley low-voltage fixtures come standard with the 0014 BZ ground spike (see accessories, page 122) and can be easily relocated every several years to adjust for the natural growth of trees and plantings.

STEP 4: COMPLETE INSTALLATION

Controls enhance landscape lighting, just as they do interior lighting. Photocells, timers, special lenses and the new landscape controller can help control your lighting plan.



PHOTOCELLS

Photocells turn the lighting on when the sun goes down. You can combine a photocell (on) and a timer (off) to avoid wasting energy after the household has retired for the night.

TIMERS

Timers provide automatic on/off control, according to how you program them and can be used in conjunction with photocells.

LENSES

Hinkley lenses are available for use with well and spot lights to create directional beams of light, diffuse lamp beam spread, enhance color and to reduce overall glare.

SMART LANDSCAPE CONTROL + DIMMER

The Hinkley smart landscape controller easily fits into any Hinkley Pro Series Transformer and remains fully enclosed and protected against the elements. Create customized lighting patterns by controlling different zones on your property

FOR ADDITIONAL ACCESSORIES AND CONTROLS, SEE PAGE 122.



ATLANTIS PATH LIGHT 1518 CD-LL
ATWELL WALL MOUNT 1114 DZ

PATH+AREA LIGHTING

GUIDING LIGHTS

Constructed with true Hinkley craftsmanship, our Path & Area lights provide ample illumination along with time-honored style and design for your landscape. This decorative yet functional lighting creates soft pools of light along walkways to lead guests safely to the door and places an extra emphasis on gardens and shrubbery to extend the warmth across your entire property.





REPUBLIC PATH LIGHTS

ESTATE
S E R I E S

Republic's striking double frame design is constructed from a composite material, and treated with an anti-fading agent for maximum durability. This symmetric fixture's transitional style pairs well with coastal or country properties, offering a low voltage semi-permanent solution to illuminate outdoor pathways.



15558 BK-LL
6" W x 24" H x 5¾" D



15558 OZ-LL
6" W x 24" H x 5¾" D



LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
15558 BK-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Black	Composite	Etched
15558 OZ-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Oil Rubbed Bronze	Composite	Etched

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Republic family from our residential product line.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	15558 BK-LL, 15558 OZ-LL	1.93	1.03	0.51	0.26	0.16	0.09	0.05	0.03

LAKEHOUSE PATH LIGHTS


The look is relaxed, but the components of Lakehouse are quietly satisfying. Lakehouse features a Black and Oil Rubbed Bronze finish accompanied by clear glass. Aluminum construction ensures Lakehouse will withstand for years. Blissfully simple, yet all the details are memorable.

ESTATE
S E R I E S



15542 BK
7¼" DIA. x 22" H

15542 OZ
7¼" DIA. x 22" H

 LED ITEM	LED ENGINE (INTEGRATED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15542 BK	E2G4W9V	1.5w LED / 3.9VA	2700K	Yes	Black	Aluminum	Clear
15542 OZ	E2G4W9V	1.5w LED / 3.9VA	2700K	Yes	Oil Rubbed Bronze	Aluminum	Clear

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Lakehouse family from our residential product line.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	15542 BK, OZ	10.16	3.59	1.05	0.36	0.19	0.09	0.04	0.02

RALEY PATH LIGHTS

Raley's regal appearance features aluminum construction, a bold Museum Black and Oil Rubbed Bronze finishes, flourishing details and clear water glass panels for a dignified style statement.

ESTATE
S E R I E S



1513 MB-LL
4½" W x 22" H x 5½" D

1513 OZ-LL
4½" W x 22" H x 5½" D

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
1513 MB-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Museum Black	Aluminum	Clear Water Glass Panels
1513 OZ-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Oil Rubbed Bronze	Aluminum	Clear Water Glass Panels

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Raley family from our residential product line.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'
FOOT CANDLES	1513 MB-LL, OZ-LL	2.06	1.13	0.53	0.26	0.12	0.06	0.03	0.02	0.01

HARBOR PATH LIGHTS

Harbor has an updated nautical feel, with a style inspired by the clean, strong lines of a welcoming lighthouse. The aluminum construction is accented by bold stripes against the etched glass.


ESTATE
S E R I E S



1560 AR-LL
7" SQ. x 24" H

1561 AR-LL
7½" W x 21¼" H x 7" D

1561 SK-LL
7½" W x 21¼" H x 7" D

 LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
1560 AR-LL	00T5-27LED-2.5	1-2.5w T5 LED / 4.6VA	2700K	Yes	Anchor Bronze	Aluminum	Etched Amber Seedy Bound
1561 AR-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Anchor Bronze	Aluminum	Etched Lens
1561 SK-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Satin Black	Aluminum	Etched Lens

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Harbor family from our residential product line.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	1561 AR-LL, SK-LL	10.14	3.18	0.8	0.29	0.1	0.03	0.01	0.01
	1560 AR-LL	0.64	0.53	0.29	0.14	0.07	0.03	0.01	



ATLANTIS PATH LIGHTS

DESIGN NOTE

Atlantis 1518 CD-LL is made from natural cedar wood, featuring individually unique wood grain patterns and color tones.



1518 BZ-LL
6½" W x 22" H x 1¼" D

1518 CD-LL
6½" W x 22" H x 1¼" D

1518 HE-LL
6½" W x 22" H x 1¼" D

1518 MZ-LL
SOLID BRASS
6½" W x 22" H x 1¼" D

1518 SK-LL
6½" W x 22" H x 1¼" D

1518 TT-LL
6½" W x 22" H x 1¼" D



LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
1518 BZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Bronze	Aluminum	Etched
1518 CD-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Cedar	Natural Cedar and Aluminum	Etched
1518 HE-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Hematite	Aluminum	Etched
1518 MZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Matte Bronze	Solid Brass	Clear
1518 SK-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Satin Black	Aluminum	Etched
1518 TT-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Titanium	Aluminum	Etched

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Atlantis family from our residential product line.


PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	0'	1'	2'	3'	4'	5'	6'
FOOT CANDLES	1518 BZ-LL, CD-LL, HE-LL, MZ-LL SK-LL, TT-LL	15.41	7.5	2.04	0.5	0.15	0.05	0.01

ATLANTIS PATH LIGHTS

DESIGN NOTE

Atlantis 1518 MZ-LL and 15014 MZ-LL feature solid brass construction and come with a lifetime warranty.

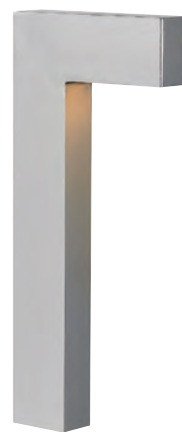

15014 BZ-LL
6½" W x 15¾" H x 1¼" D

15014 HE-LL
6½" W x 15¾" H x 1¼" D

15014 MZ-LL
SOLID BRASS
6½" W x 15¾" H x 1¼" D



15014 SK-LL
6½" W x 15¾" H x 1¼" D

15014 TT-LL
6½" W x 15¾" H x 1¼" D

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15014 BZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Bronze	Aluminum	Etched
15014 HE-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Hematite	Aluminum	Etched
15014 MZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Matte Bronze	Solid Brass	Clear
15014 SK-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Satin Black	Aluminum	Etched
15014 TT-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Titanium	Aluminum	Etched

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Atlantis family from our residential product line.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'
FOOT CANDLES	15014 BZ-LL, HE-LL, MZ-LL, SK-LL, TT-LL	12.13	1.98	0.36	0.06	0.01



REVOLVE 1550 SK

REVOLVE PATH LIGHTS

**DESIGN
NOTE**

Omni-directional lamp included



1550 BZ
7¼" W x 22½" H x 6" D

1550 SK
7¼" W x 22½" H x 6" D

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
1550 BZ	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Bronze	Aluminum	Clear Seedy
1550 SK	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Satin Black	Aluminum	Clear Seedy

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'
FOOT CANDLES	1550 BZ, SK	4.33	2.31	0.93	0.42	0.21	0.13	0.08	0.05	0.03

SATURN PATH LIGHTS

With robust construction of intersecting lines that contrast against an etched opal glass shade, the Saturn LED path light is a stunning modern design that offers light and style to walkways and surrounding outdoor living spaces.



1579 SK-LL
4½" DIA. x 22¼" H



1579 MT-LL
4½" DIA. x 22¼" H



1579 SS-LL
4½" DIA. x 22¼" H

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
1579 MT-LL	00T5-27LED-2.5	1-2.5w T5 LED / 4.6VA	2700K	Yes	Metro Bronze	Solid Brass	Etched Opal
1579 SK-LL	00T5-27LED-2.5	1-2.5w T5 LED / 4.6VA	2700K	Yes	Satin Black	Aluminum	Etched Opal
1579 SS-LL	00T5-27LED-2.5	1-2.5w T5 LED / 4.6VA	2700K	Yes	Stainless Steel	Stainless Steel	Etched Opal

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Saturn family from our residential product line.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	1579 MT-LL, SK-LL, SS-LL	1.52	0.59	0.24	0.11	0.06	0.04	0.02	0.01

FREEPORT PATH LIGHTS

The popular Freeport design is now available as a stylish Coastal Elements path light to coordinate seamlessly with the matching Freeport lantern series in two key finishes. Freeport features a classic New England design constructed from a composite material for timeless, traditional style built to last. The finish is resistant to rust and corrosion with a 5 year warranty.



LED ITEM	LED LAMP (INCLUDED)	LED WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
15030 OZ-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Oil Rubbed Bronze	Composite	Clear Seedy
15030 TK-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Textured Black	Composite	Clear Seedy

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Freeport family from our residential product line.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'
FOOT CANDLES	15030 OZ-LL, TK-LL	3.54	1.30	0.44	0.19	0.07	0.02	0.01

TROYER PATH LIGHTS

Made of sturdy, solid aluminum, Troyer's warm and inviting heritage details and timeless finishes create a classic outdoor silhouette. Combining farmhouse and industrial, this path light features touches like the trademark gooseneck that suspends the rustic shade and a unique cased opal glass accent at the top for additional light.



15492 BK-LL
7" W x 26" H x 8" D

15492 OZ-LL
7" W x 26" H x 8" D

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
15492 BK-LL	00T3-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Black	Aluminum	Cased Opal
15492 OZ-LL	00T3-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Oil Rubbed Bronze	Aluminum	Cased Opal

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Troyer family from our residential product line, see Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'
FOOT CANDLES	15492 BK-LL, 15492 OZ-LL	2.33	0.70	0.11	0.02	0.01



PATH LIGHTS




15102 TK-LL
FOUNDRY™ LED
PATH LIGHT
7" W x 22" H x 9" D

15102 MR-LL
FOUNDRY™ LED
PATH LIGHT
7" W x 22" H x 9" D

1566 DZ-LL
ATWELL™ LED
PATH LIGHT
8¾" W x 25½" H x 8" D

1566 OZ-LL
ATWELL™ LED
PATH LIGHT
8¾" W x 25½" H x 8" D

 LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
15102 TK-LL*	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Textured Black	Composite & Aluminum	
15102 MR-LL*	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Museum Bronze	Composite & Aluminum	
1566 DZ-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Aged Zinc	Aluminum	Clear Seedy
1566 OZ-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Oil Rubbed Bronze	Aluminum	Clear Seedy

*Equipped with bulb shield. See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Path lights coordinate with the Atwell and Foundry families from our residential product line.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	15102 TK-LL, MR-LL	6.79	2.89	1.06	0.43	0.16	0.06	0.01	
	1566 DZ-LL, OZ-LL	2.01	1.06	0.96	0.37	0.18	0.08	0.06	0.02

PATH LIGHTS



1516 MR-LL
LEDGEWOOD™ LED
PATH LIGHT
5" W x 15" H x 3½" D



1508 CB-LL
IVY™ LED
PATH LIGHT
6" W x 26" H x 6" D



1554 SZ-LL
ASPEN™ LED
PATH LIGHT
7" W x 22" H x 5" D



1568 RB-LL
SQUIRREL™ LED
PATH LIGHT
6½" W x 22" H x 4½" D

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
1508 CB-LL*	00T5-27LED-2.5	1-2.5w T5 LED / 4.6VA	2700K	Yes	Copper Bronze	Solid Brass	Light Amber*
1516 MR-LL	00T5-27LED-2.5	1-2.5w T5 LED / 4.6VA	2700K	Yes	Museum Bronze	Aluminum	Champagne Etched
1554 SZ-LL	00T5-27LED-2.5	1-2.5w T5 LED / 4.6VA	2700K	Yes	Sienna Bronze	Solid Brass	Honey Art
1568 RB-LL	00T5-27LED-2.5	1-2.5w T5 LED / 4.6VA	2700K	Yes	Regency Bronze	Aluminum	Champagne Marble

*Equipped with bulb shield. See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'
FOOT CANDLES	1508 CB-LL	4.39	2.57	1.15	0.58	0.30	0.15	0.09	0.06	0.04	0.02	0.01
	1516 MR-LL	1.87	1.42	0.66	0.34	0.19	0.12	0.08	0.05	0.03		
	1554 SZ-LL	5.57	0.36	0.10	0.03							
	1568 RB-LL	5.18	1.97	0.78	0.36	0.20	0.12	0.07	0.05	0.01		


PATH LIGHTS



1529 CB-LL
PLANTATION™ LED
PATH LIGHT
3½" DIA. x 22" H

1547 BK-LL
SHELTER™ LED
PATH LIGHT
4¾" W x 22½" H x 4½" D

1547 KZ-LL
SHELTER™ LED
PATH LIGHT
4¾" W x 22½" H x 4½" D

 LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
1529 CB-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Copper Bronze	Aluminum	Clear Optic
1547 BK-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Black	Aluminum	Clear Seedy
1547 KZ-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Buckeye Bronze	Aluminum	Clear Seedy

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Path lights coordinate with the Plantation and Shelter families from our residential product line, see Hinkley.com

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'
FOOT CANDLES	1529 CB-LL	0.5	1.25	0.25	0.32	0.12	0.12	0.11
	1547 BK-LL, KZ-LL	1.49	0.95	0.54	0.15	0.06		

PATH LIGHTS



1504 BZ
CARSON™ LED
PATH LIGHT
6" W x 22" H x 7" D

1403 OC-LL
ESSENCE™ LED
PATH LIGHT
6" DIA. x 17" H

1540 CB-LL
MONTICELLO™ LED
PATH LIGHT
8" W x 22" H x 7" D

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
1403 OC-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Olde Copper	Copper	Frosted Shield
1504 BZ	E5050LED - Integrated	1.5w LED / 3.9VA	2700K	Yes	Bronze	Aluminum	Etched Lens
1540 CB-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Copper Bronze	Solid Brass	

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'
FOOT CANDLES	1403 OC-LL	3.41	1.10	0.37	0.15	0.05	0.01
	1504 BZ	0.85	0.33	0.003			
	1540 CB-LL	3.41	1.27	0.46	0.11	0.01	

PATH LIGHTS



1555 CB-LL
BRATENAHL™ LED
PATH LIGHT
7¼" W x 25" H x 4½" D

1502 CY-LL
CONTEMPO™ LED
PATH LIGHT
7" W x 26" H x 7¾" D

1502 BZ-LL
CONTEMPO™ LED
PATH LIGHT
7" W x 26" H x 7¾" D

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
1502 BZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Bronze	Aluminum	Etched Opal
1502 CY-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Charcoal Gray	Aluminum	Etched Opal
1555 CB-LL	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	2700K	Yes	Copper Bronze	Solid Brass	Clear Seedy

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	1502 BZ-LL, CY-LL	6.8	2.72	1.18	0.6	0.36	0.23	0.16	0.11
	1555 CB-LL	0.72	0.92	0.43	0.25	0.12	0.1	0.06	0.01

PATH LIGHTS

DESIGN NOTE | Open center provides a unique visual effect



15540 BK
AURA™ LED
PATH LIGHT
7" W x 21½" H x 7" D

15540 BZ
AURA™ LED
PATH LIGHT
7" W x 21½" H x 7" D

15714 BZ
ARC™ LED
PATH LIGHT
17" W x 23¼" H x 1½" D

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15540 BK	E2G4W9V - Integrated	1-1.5w LED / 3.9VA	2700K	Yes	Black	Aluminum	Acrylic
15540 BZ	E2G4W9V - Integrated	1-1.5w LED / 3.9VA	2700K	Yes	Bronze	Aluminum	Acrylic
15714 BZ	E5050LED - Integrated	1-1.5w LED / 3.9VA	2700K	Yes	Bronze	Aluminum	Etched Acrylic

40,000 hour lifespan. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'
FOOT CANDLES	15540 BK, BZ	12.87	4.15	1.23	0.28	0.06	0.02	
	15714 BZ	7.02	2.52	1.06	0.35	0.16	0.12	

PIZA PATH LIGHTS




1548 SK-LL
PIZA™ LED
PATH LIGHT
10" W x 15" H x 1¾" D



1548 BZ-LL
PIZA™ LED
PATH LIGHT
10" W x 15" H x 1¾" D



1548 TT-LL
PIZA™ LED
PATH LIGHT
10" W x 15" H x 1¾" D

 LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
1548 BZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Bronze	Aluminum	Etched
1548 SK-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Satin Black	Aluminum	Etched
1548 TT-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Titanium	Aluminum	Etched

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'
FOOT CANDLES	1548 BZ-LL, SK-LL, TT-LL	12.91	2.21	0.81	0.22	0.09



PIZA 1548 TT-LL
ARIA 2307 BK

HARDY ISLAND PATH LIGHTS

The Hardy Island Collection, named for the ruggedly beautiful island off the coast of British Columbia, defies the harshest environments in style with landscape lighting that features fully enclosed lamps and a rich weathered brass finish that will mature naturally over time.



16007 MZ-LL
LARGE HAMMERED
PATH LIGHT
6¾" DIA. x 23¼" H

16010 MZ-LL
SMALL HAMMERED
PATH LIGHT
6¾" DIA. x 15½" H

16004 MZ-LL
SMALL TRADITIONAL
PATH LIGHT
7" DIA. x 15½" H

16050 MZ-LL
SMALL STANDARD
PATH LIGHT
4½" DIA. x 15" H

16055 MZ-LL
LARGE STANDARD
PATH LIGHT
6½" DIA. x 22" H

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS OR LENS
16004 MZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Cast Brass	Clear Dome
16007 MZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Cast Brass	Clear Dome
16010 MZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Cast Brass	Clear Dome
16050 MZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Cast Brass	Frosted Acrylic
16055 MZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Cast Brass	Frosted Acrylic

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	16004 MZ-LL	4.37	1.66	0.67	0.29	0.14	0.08	0.04	0.01
	16007 MZ-LL	3.47	1.29	0.6	0.32	0.18	0.09	0.05	0.02
	16010 MZ-LL	4.51	0.59	0.53	0.26	0.09	0.03	0.01	
	16050 MZ-LL	3.13	0.96	0.24	0.06	0.01			
	16055 MZ-LL	3.06	1.36	0.48	0.27	0.06	0.02		



16012 MZ-LL
ROUND SIDE MOUNT
PATH LIGHT
7" W x 18¼" H x 7½" D




16016 MZ-LL
MINI CLASSIC
PATH LIGHT
5¼" DIA. x 15¾" H



16022 MZ-LL
SMALL CLASSIC
PATH LIGHT
8" DIA. x 16" H



16019 MZ-LL
LARGE CLASSIC
PATH LIGHT
8" DIA. x 24" H

 LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS OR LENS
16012 MZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	Yes	Matte Bronze	Cast Brass	Etched Lens
16016 MZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Cast Brass	Clear Dome
16019 MZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Cast Brass	Clear Dome
16022 MZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Cast Brass	Clear Dome


See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	16012 MZ-LL	14.43	6.82	1.78	0.41	0.13	0.04	0.01	
	16016 MZ-LL	1.68	0.67	0.29	0.06				
	16019 MZ-LL	2.85	0.77	0.41	0.23	0.13	0.07	0.01	
	16022 MZ-LL	2.16	2.16	0.33	0.15	0.02			

SPRINGFIELD PATH LIGHTS

Inspired by Hinkley's superior Hardy Island collection, the complementary new Springfield path light is a robust, practical option in durable aluminum with a powder coated finish. Sleek and minimal, Springfield is available in a variety of best-selling sizes and classic finishes to easily accommodate any project.

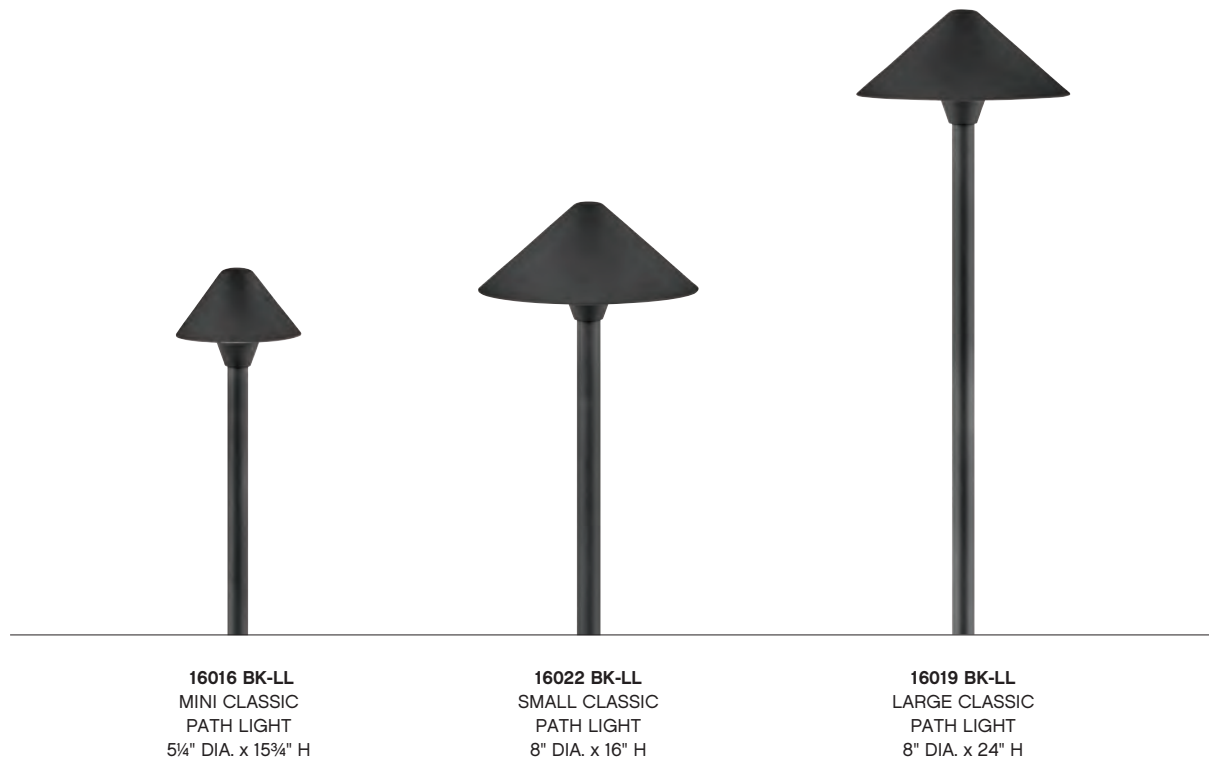

LED ITEM	LED LAMP (INCLUDED)	LED WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
16016 BK-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Black	Aluminum	Clear
16019 BK-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Black	Aluminum	Clear
16022 BK-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Black	Aluminum	Clear

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'
FOOT CANDLES	16016 BK-LL	1.68	0.67	0.29	0.06			
	16019 BK-LL	2.85	0.77	0.41	0.23	0.13	0.07	0.01
	16022 BK-LL	2.16	0.85	0.33	0.15	0.02		

SPRINGFIELD PATH LIGHTS



16016 OZ-LL
MINI CLASSIC
PATH LIGHT
5¼" DIA. x 15¾" H

16022 OZ-LL
SMALL CLASSIC
PATH LIGHT
8" DIA. x 16" H

16019 OZ-LL
LARGE CLASSIC
PATH LIGHT
8" DIA. x 24" H

LED ITEM	LED LAMP (INCLUDED)	LED WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	GLASS
16016 OZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Oil Rubbed Bronze	Aluminum	Clear
16019 OZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Oil Rubbed Bronze	Aluminum	Clear
16022 OZ-LL	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Oil Rubbed Bronze	Aluminum	Clear

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'
FOOT CANDLES	16016 OZ-LL	1.68	0.67	0.29	0.06			
	16019 OZ-LL	2.85	0.77	0.41	0.23	0.13	0.07	0.01
	16022 OZ-LL	2.16	0.85	0.33	0.15	0.02		

REX PATH LIGHTS



LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
1531 BZ	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Bronze	Aluminum	Clear
1531 TK	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Textured Black	Aluminum	Clear
1533 BZ	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Bronze	Aluminum	Clear
1533 TK	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Textured Black	Aluminum	Clear

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'
FOOT CANDLES	1531 BZ, 1531 TK	3.2	0.823	0.034	
	1533 BZ, 1533 TK	2.786	1.31	0.443	0.67

**DESIGN
NOTE**

The versatile Rex path light casts a clean white light to illuminate walkways and complement existing outdoor lighting and décor.



1534 BZ
LARGE LED
PATH LIGHT
8" DIA. x 30" H

1534 TK
LARGE LED
PATH LIGHT
8" DIA. x 30" H

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
1534 BZ	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Bronze	Aluminum	Clear
1534 TK	00T3-27LED-1.5	1-1.5w T3 LED / 1.8VA	2700K	Yes	Textured Black	Aluminum	Clear

See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'	5'	6'	7'
FOOT CANDLES	1534 BZ, 1534 TK	4.65	1.667	0.695	0.367	0.166	0.05	0.014



ATLANTIS 15502 SK
MAX 2594 BK

ATLANTIS SQUARE BOLLARDS

Atlantis features a minimalist design for the ultimate in urban sophistication. Constructed of solid aluminum, Atlantis provides a chic solution to eco-conscious homeowners.



15502 BZ
SQUARE SMALL
BOLLARD
2" SQ. x 20" H



15502 TT
SQUARE SMALL
BOLLARD
2" SQ. x 20" H



15502 SK
SQUARE SMALL
BOLLARD
2" SQ. x 20" H

LED ITEM	LED LAMP (INCLUDED)	LED WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15502 BZ	MR1127K	1-4w MR11 LED / 4VA	2700K	Yes	Bronze	Aluminum	Etched
15502 SK	MR1127K	1-4w MR11 LED / 4VA	2700K	Yes	Satin Black	Aluminum	Etched
15502 TT	MR1127K	1-4w MR11 LED / 4VA	2700K	Yes	Titanium	Aluminum	Etched

Photometrics for bollards are available on Hinkley.com. See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Atlantis family from our residential product line.

ATLANTIS SQUARE BOLLARDS

Atlantis features a minimalist design for the ultimate in urban sophistication. Constructed of solid aluminum, Atlantis provides a chic solution to eco-conscious homeowners.




15602 BZ
SQUARE LARGE
BOLLARD
3" SQ. x 30" H



15602 TT
SQUARE LARGE
BOLLARD
3" SQ. x 30" H



15602 SK
SQUARE LARGE
BOLLARD
3" SQ. x 30" H

 LED ITEM	LED LAMP (INCLUDED)	WATTAGE / VOLT AMPS	SOCKET RATED	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15602 BZ	4WLEDMR16	1-4w MR16 LED / 5.7VA	8w LED max.	2700K	Yes	Bronze	Aluminum	Etched
15602 SK	4WLEDMR16	1-4w MR16 LED / 5.7VA	8w LED max.	2700K	Yes	Satin Black	Aluminum	Etched
15602 TT	4WLEDMR16	1-4w MR16 LED / 5.7VA	8w LED max.	2700K	Yes	Titanium	Aluminum	Etched

Photometrics for bollards are available on Hinkley.com. A wiring kit, 2" diameter, 18" length PVC post and surface mount are supplied. For transformers, see pages 127-128. Coordinates with the Atlantis family from our residential product line.

ATLANTIS ROUND BOLLARDS

Atlantis features a minimalist design for the ultimate in urban sophistication. Constructed of solid aluminum, Atlantis provides a chic solution to eco-conscious homeowners.



15501 BZ
 ROUND SMALL
 BOLLARD
 2" DIA. x 20" H



15501 TT
 ROUND SMALL
 BOLLARD
 2" DIA. x 20" H



15501 SK
 ROUND SMALL
 BOLLARD
 2" DIA. x 20" H

LED ITEM	LED LAMP (INCLUDED)	LED WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15501 BZ	MR1127K	1-4w MR11 LED / 4VA	2700K	Yes	Bronze	Aluminum	Etched
15501 SK	MR1127K	1-4w MR11 LED / 4VA	2700K	Yes	Satin Black	Aluminum	Etched
15501 TT	MR1127K	1-4w MR11 LED / 4VA	2700K	Yes	Titanium	Aluminum	Etched

Photometrics for bollards are available on Hinkley.com. See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com. Coordinates with the Atlantis family from our residential product line.

ATLANTIS ROUND BOLLARDS

Atlantis features a minimalist design for the ultimate in urban sophistication. Constructed of solid aluminum, Atlantis provides a chic solution to eco-conscious homeowners.




15601 BZ
ROUND LARGE
BOLLARD
3" DIA. x 30" H



15601 TT
ROUND LARGE
BOLLARD
3" DIA. x 30" H



15601 SK
ROUND LARGE
BOLLARD
3" DIA. x 30" H

 LED ITEM	LED LAMP (INCLUDED)	WATTAGE / VOLT AMPS	SOCKET RATED	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15601 BZ	4WLEDMR16	1-4w MR16 LED / 5.7VA	8w LED max.	2700K	Yes	Bronze	Aluminum	Etched
15601 SK	4WLEDMR16	1-4w MR16 LED / 5.7VA	8w LED max.	2700K	Yes	Satin Black	Aluminum	Etched
15601 TT	4WLEDMR16	1-4w MR16 LED / 5.7VA	8w LED max.	2700K	Yes	Titanium	Aluminum	Etched

Photometrics for bollards are available on Hinkley.com. A wiring kit, 2" diameter, 18" length PVC post and surface mount are supplied. For transformers, see pages 127-128. Coordinates with the Atlantis family from our residential product line. Coordinates with the Atlantis family from our residential product line.

SHELTER BOLLARD

Shelter's minimalist style in aluminum creates a chic, dramatic statement as the light from above grazes through its clear seedy glass.



15607 BK
4" W x 30" H x 3" D

LED ITEM	LED LAMP (INCLUDED)	WATTAGE / VOLT AMPS	SOCKET RATED	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15607 BK	4WLEDMR16	1-4w MR16 LED / 5.7VA	8w LED max.	2700K	Yes	Black	Aluminum	Clear Acrylic Outside Cylinder Seedy Glass Inside Panel

Photometrics for bollards are available on Hinkley.com. See pages 133-134 for LED bulbs. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. Coordinates with the Shelter family from our residential product line.



SPOT LIGHT 1536 BZDN



ACCENT LIGHTING

DOING THE GROUNDWORK

Accent lighting is the backbone of successful landscape design. Our LumaCORE technology provides industry-leading design and functionality that skillfully adapts to any application. Hinkley accent lights supply the warm glow to emphasize unique aspects of your property.

HARDY ISLAND
1536 MZ-LMA27K



VARIABLE OUTPUT LumaCORE™

Made for those who seek superior form, function, and thoughtful design, Variable Output LumaCORE is a single system that delivers **consistent performance** and multiple lighting options for spot, flood, and well lights. Backed by our lifetime guarantee, it's expertly engineered to be the total package.



FEATURES + BENEFITS

ADJUSTABILITY

The easy-to-use rotational output switch on the engine allows you to adjust the wattage settings in seconds. Using your fingers or a small flat-bladed screwdriver, you can rotate the switch to **3W (260 Lumens)**, **5W (350 Lumens)**, **8W (475 Lumens)**, or **12w (750 Lumens)** to fit any application.

LIFETIME WARRANTY

40,000-rated hours means you get 14 years of use (8 hours a day) vs. LED MR16 lamps that only last a few seasons. Plus, the lifetime warranty guarantees longevity.

VERSATILITY

The LumaCORE Variable Output Engine is compatible with Hinkley Spot, Flood, and Well Light Fixtures – even previously purchased Hinkley fixtures. It's the ideal solution to be a long-term replacement for lamps that have failed you in the past.

EASY INTERCHANGEABILITY WITH 3 FIXTURE STYLES



12V SPOT LIGHTS - PAGE 59
120V SPOT LIGHTS - PAGE 142




12V WELL LIGHTS - PAGE 61
120V WELL LIGHTS - PAGE 142



12V FLOOD LIGHTS
PAGE 60

UNLOCKING THE POWER OF THE VARIABLE OUTPUT Luma**CORE**™ SYSTEM

This variable output system is specifically designed to give the user full control. Select the combination of settings to highlight your home's architectural features, accentuate the natural beauty of your property, extend your outdoor living space, and add safety and security around your home.

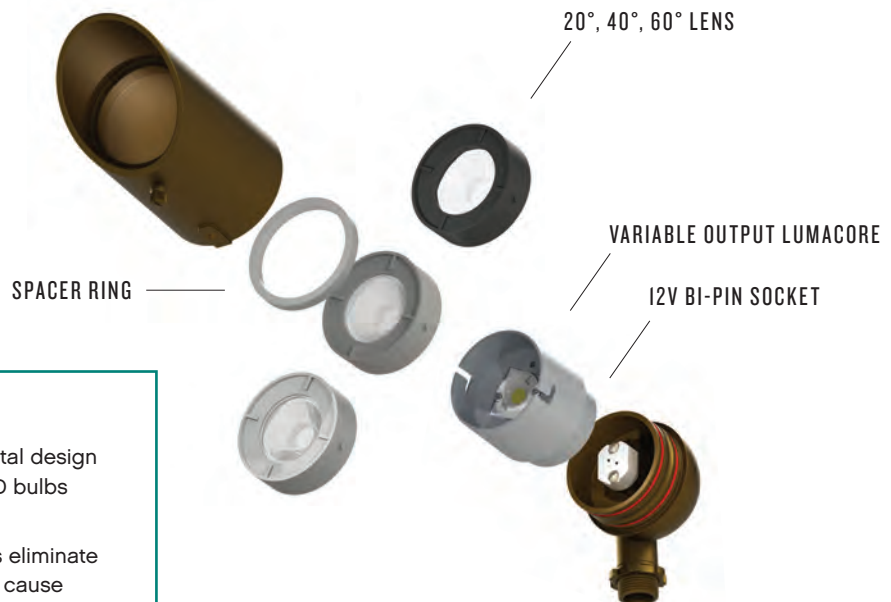

MAINTENANCE FREE


No bulbs: LED core and metal-on-metal design dissipates heat and out-performs LED bulbs that can burn out or break.

No moving parts: Pre-set light beams eliminate twisting and turning adjustments that cause premature wear and tear.

INSIDE THE VARIABLE OUTPUT LumaCORE™ SYSTEM

With **4 output levels** and **3 lenses included**, you can easily mix and match settings to **create 12 combinations of light to fit any application**. The setting combination can be adjusted at any time, allowing you to switch up your landscape lighting as the foliage and your taste changes.
Available in two color temperatures: **2700K (warm white)** or **3000K (white)**.

The rotational output switch **(A)** shown in the **12 Watt setting** can be adjusted with a small flat-bladed screwdriver. Rotate the switch to the positions shown below to set the desired wattage output.

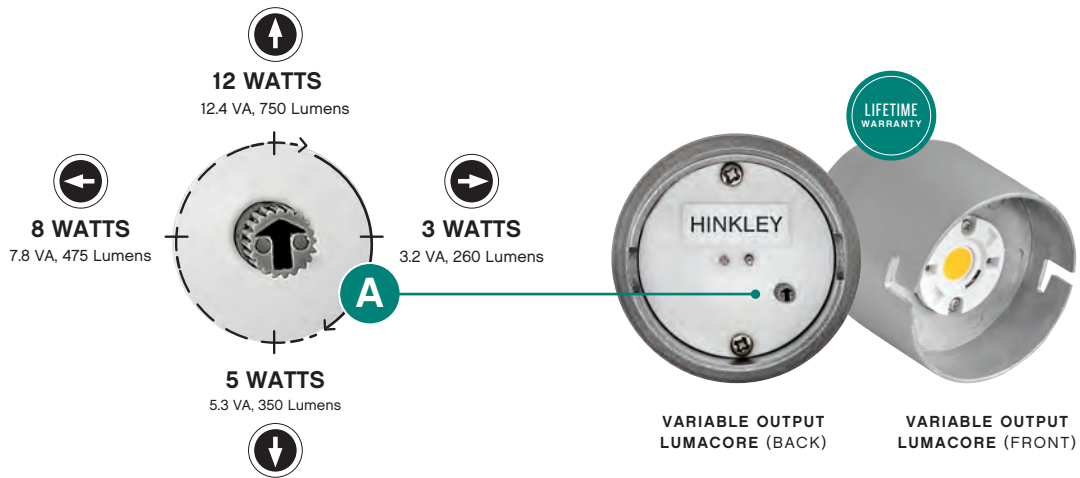

Kelvin Temperature Options: **2700K (Warm White)** or **3000K (White)**

ALL THREE LENS OPTIONS INCLUDED:



20° SPOT

Ideal beam spread for highlighting tall trees, architectural features and flag poles



40° FLOOD

Most common beam spread for up lighting and wall washing



60° WIDE FLOOD

Ideal beam spread for lighting canopies of trees, large structures and wall washing

SEE **PAGE 142** TO EXPLORE THE 120V VARIABLE OUTPUT LumaCORE™

VARIABLE OUTPUT LumaCORE™ SPOT LIGHTS





1535 BZ-LMA27K
1535 BZ-LMA30K
 SPOT LIGHT
 2½" DIA. SHROUD
 9¾" W x 3¼" H



1536 TXB-LMA27K
1536 TXB-LMA30K
 SPOT LIGHT
 2½" DIA. SHROUD
 5¾" W x 3¼" H

DESIGN NOTE

NEW Textured Brown finish to **SEAMLESSLY FIT** INTO ANY outdoor oasis.

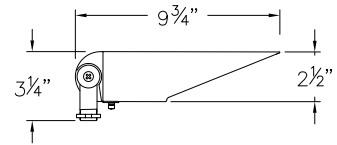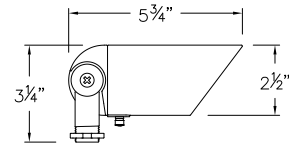

1536 MZ-LMA27K
1536 MZ-LMA30K
 HARDY ISLAND™
 SPOT LIGHT
 2½" DIA. SHROUD
 5¾" W x 3¼" H



1536 BZ-LMA27K
1536 BZ-LMA30K
 SPOT LIGHT
 2½" DIA. SHROUD
 5¾" W x 3¼" H



1536 SK-LMA27K
1536 SK-LMA30K
 SPOT LIGHT
 2½" DIA. SHROUD
 5¾" W x 3¼" H

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	VOLT AMPS	LUMENS	COLOR TEMP.	FINISH	CONSTRUCTION	LENS
1535 BZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Bronze	Aluminum	Clear
1535 BZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Bronze	Aluminum	Clear
1536 BZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Bronze	Aluminum	Clear
1536 BZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Bronze	Aluminum	Clear
1536 MZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Matte Bronze	Solid Brass	Clear
1536 MZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Matte Bronze	Solid Brass	Clear
1536 SK-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Satin Black	Aluminum	Clear
1536 SK-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Satin Black	Aluminum	Clear
1536 TXB-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Textured Brown	Aluminum	Clear
1536 TXB-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Textured Brown	Aluminum	Clear

40,000 hour lifespan. A wiring kit is supplied. Photometrics for spot lights are based off engine photometrics. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For non-integrated base item, see page 75. For warranty details, see Hinkley.com.

VARIABLE OUTPUT LumaCORE™ FLOOD LIGHTS



15300 BZ-LMA27K
15300 BZ-LMA30K
 FLOOD SPOT LIGHT
 4½" W x 4" H x 4½" D




15300 MZ-LMA27K
15300 MZ-LMA30K
 HARDY ISLAND™
 FLOOD SPOT LIGHT
 4½" W x 4" H x 4½" D



ACCENT LIGHTING




15300 SK-LMA27K
15300 SK-LMA30K
 FLOOD SPOT LIGHT
 4½" W x 4" H x 4½" D

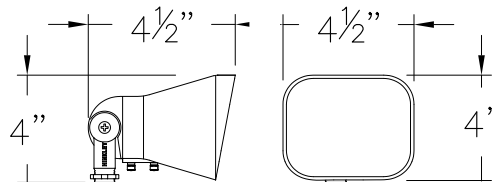

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	VOLT AMPS	LUMENS	COLOR TEMP.	FINISH	CONSTRUCTION	LENS
15300 BZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Bronze	Aluminum	Frosted
15300 BZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Bronze	Aluminum	Frosted
15300 MZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Matte Bronze	Cast Brass	Frosted
15300 MZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Matte Bronze	Cast Brass	Frosted
15300 SK-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Satin Black	Aluminum	Frosted
15300 SK-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Satin Black	Aluminum	Frosted


40,000 hour lifespan. A wiring kit is supplied. Photometrics for spot lights are based off engine photometrics. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For non-integrated base item, see page 80. For warranty details, see Hinkley.com.

VARIABLE OUTPUT LumaCORE™ WELL LIGHTS






15702 BZ-LMA27K
15702 BZ-LMA30K
 FLAT TOP WELL LIGHT
 4 1/2" DIA. x 4" H x 1" H TOP
 3 1/2" DIA. BASE

15702 MZ-LMA27K
15702 MZ-LMA30K
 FLAT TOP WELL LIGHT
 4 1/2" DIA. x 4" H x 1" H TOP
 3 1/2" DIA. BASE



15705 BZ-LMA27K
15705 BZ-LMA30K
 GRILL TOP WELL LIGHT
 4 3/4" DIA. x 4 3/4" H x 1 1/4" H TOP
 3 1/2" DIA. BASE


15705 MZ-LMA27K
15705 MZ-LMA30K
 GRILL TOP WELL LIGHT
 4 3/4" DIA. x 4 3/4" H x 1 1/4" H TOP
 3 1/2" DIA. BASE

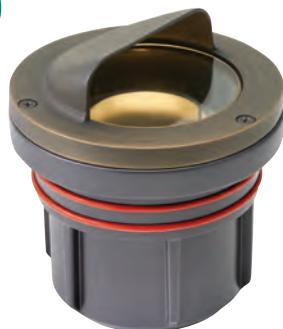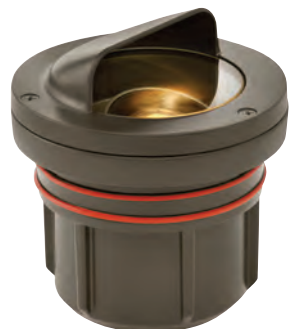

15708 BZ-LMA27K
15708 BZ-LMA30K
 SHIELDED WELL LIGHT
 4 1/2" DIA. x 5" H x 2" H TOP
 3 1/2" DIA. BASE

15708 MZ-LMA27K
15708 MZ-LMA30K
 SHIELDED WELL LIGHT
 4 1/2" DIA. x 5" H x 2" H TOP
 3 1/2" DIA. BASE





Anti-glare hex louvers available. See page 130.



DESIGN NOTE

Light source cradle tilts 20° in both directions for optimal beam angling

FEATURES + BENEFITS

- AVAILABLE IN VARIABLE LUMACORE LED
- BURIAL SLEEVE AND CONCRETE KIT INCLUDED
- OPTIONAL HEX LOUVER LENS AVAILABLE, 0037HL
- LAMP TILT +/- 20°
- FLAT TOP IS DRIVE OVER RATED



Well lights come with a PVC constructed concrete pour kit. Includes a dense foam cap to prevent concrete from entering.

4 1/8" DIA. x 5" H

FLAT TOP WELL LIGHTS*

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	VOLT AMPS	LUMENS	COLOR TEMP.	FINISH	CONSTRUCTION	LENS
15702 BZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Bronze	Aluminum	Clear
15702 BZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Bronze	Aluminum	Clear
15702 MZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Matte Bronze	Brass & Aluminum	Clear
15702 MZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Matte Bronze	Brass & Aluminum	Clear

40,000 hour lifespan. *Flat top well lights are drive over rated up to 4,500 lbs. A wiring kit is supplied. Photometrics for well lights are based off engine photometrics. For accessories, see pages 129-130. For transformers, see pages 127-128. For non-integrated base item, see page 81. For warranty details, see Hinkley.com.

GRILL TOP WELL LIGHTS

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	VOLT AMPS	LUMENS	COLOR TEMP.	FINISH	CONSTRUCTION	LENS
15705 BZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Bronze	Aluminum	Clear
15705 BZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Bronze	Aluminum	Clear
15705 MZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Matte Bronze	Brass & Aluminum	Clear
15705 MZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Matte Bronze	Brass & Aluminum	Clear

40,000 hour lifespan. A wiring kit is supplied. Photometrics for well lights are based off engine photometrics. For accessories, see pages 129-130. For transformers, see pages 127-128. For non-integrated base item, see page 81. For warranty details, see Hinkley.com.

SHIELDED WELL LIGHTS

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	VOLT AMPS	LUMENS	COLOR TEMP.	FINISH	CONSTRUCTION	LENS
15708 BZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Bronze	Aluminum	Clear
15708 BZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Bronze	Aluminum	Clear
15708 MZ-LMA27K	27G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Matte Bronze	Brass & Aluminum	Clear
15708 MZ-LMA30K	30G4SE-12W	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Matte Bronze	Brass & Aluminum	Clear

40,000 hour lifespan. A wiring kit is supplied. Photometrics for well lights are based off engine photometrics. For accessories, see pages 129-130. For transformers, see pages 127-128. For non-integrated base item, see page 81. For warranty details, see Hinkley.com.






LUMACORE SPOT LIGHT 1536 TXB-LMA27K

VARIABLE OUTPUT LumaCORE™ ENGINE PHOTOMETRICS

The LumaCORE Variable Output Engine broadens landscape lighting options in a single unit. Select the combination of settings to highlight your home's architectural features, accentuate the natural beauty of your property, extend your outdoor living space, and add safety and security around your home.

PHOTOMETRIC GUIDE

Degrees shown indicate the angle of beam spread at 3W.
All three lenses are included with each Variable Output LumaCORE System.

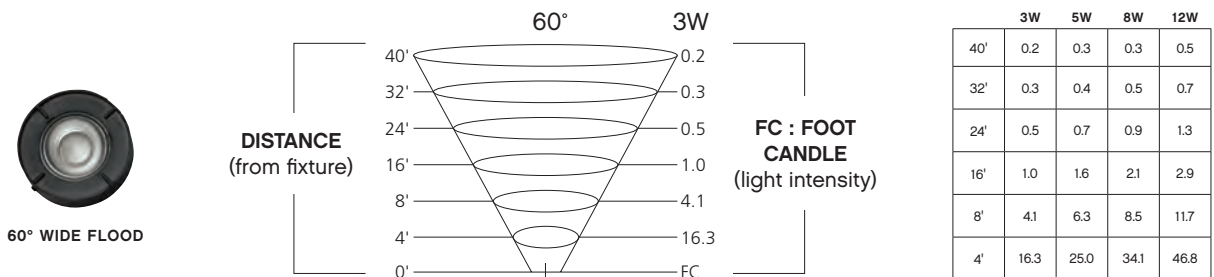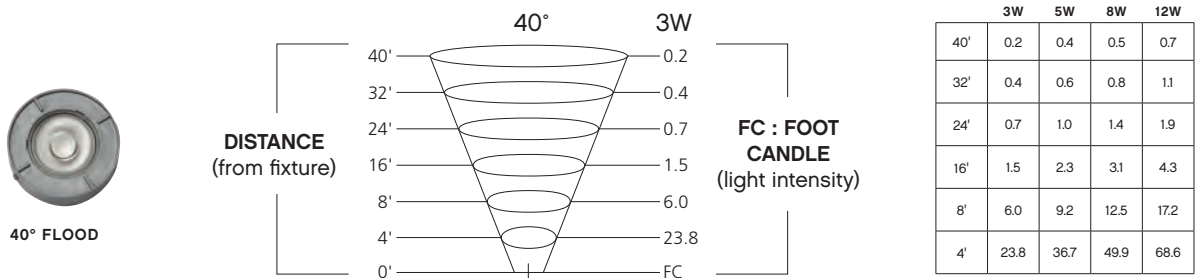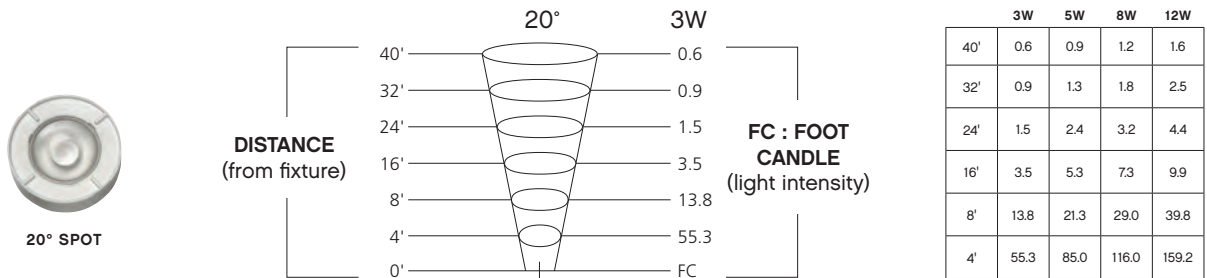



SPARTA

STAINLESS STEEL

EXPAND YOUR HORIZONS

Explore Sparta's sleek, contemporary collection and imagine the possibilities.

The ultra-modern Sparta series is constructed from solid stainless steel alloy for virtually indestructible lighting. Four robust designs are expertly engineered to deliver water-tight fixtures that ensure flexibility for a variety of applications.

EASY TO SET UP AND ENJOY

Simply pair Sparta fixtures with a Hinkley low-voltage transformer and voila! Hinkley transformers feature 12V and 15V multi-tap outputs for superior strength and performance.

SPARTA SNAPSHOT

Construction: 316 Stainless Steel | **Power:** 12V | **Color Temperature:** 3000K

Suitable For: Use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Meets United States UL Underwriters Laboratories & CSA Canadian Standards Association Product Safety Standards. Integrated LED components carry a 10-year limited warranty. Please refer to Hinkley's Warranty for complete product warranty details as some warranty limitations may apply.


Transformer is required.

FLARE WELL LIGHT 15712 SS
SPRINGFIELD 16019 BK-LL




DOT BUTTON LIGHTS


Dot indicator lighting is a recessed integrated LED inground landscape luminaire featuring durable clear optic glass and constructed with cast 316 stainless steel. Available in both small and large sizes and round and square contemporary forms for up, down and side light applications, Dot ensures maximum flexibility.

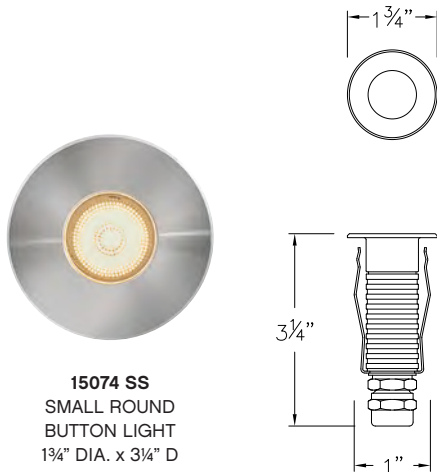


15074 SS
SMALL ROUND
BUTTON LIGHT
1 3/4" DIA. x 3 1/4" D

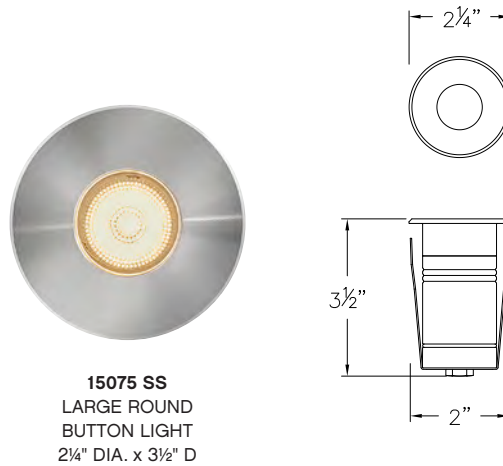

15075 SS
LARGE ROUND
BUTTON LIGHT
2 1/4" DIA. x 3 1/2" D

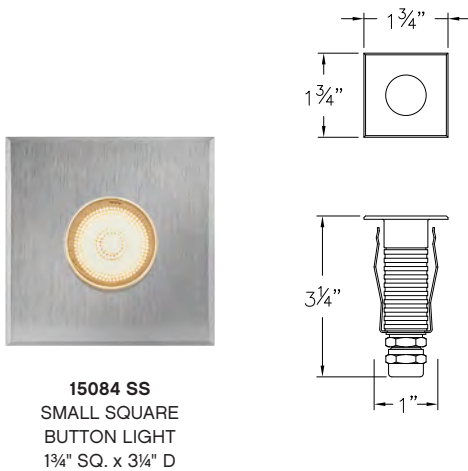

15084 SS
SMALL SQUARE
BUTTON LIGHT
1 3/4" SQ. x 3 1/4" D

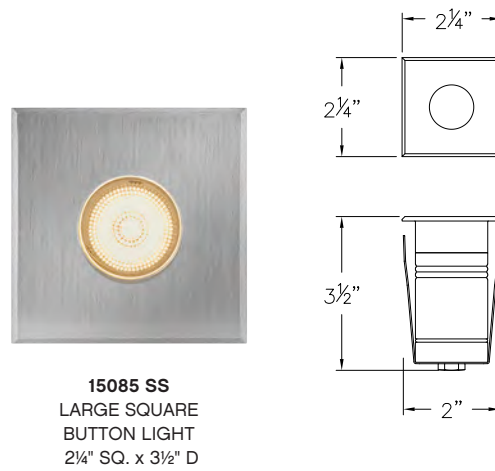


15085 SS
LARGE SQUARE
BUTTON LIGHT
2 1/4" SQ. x 3 1/2" D

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15074 SS	D15074/84	2.5w LED / 3VA	50	3000K	Yes	Stainless Steel	Stainless Steel	Clear Optic
15075 SS	D15075/85	4w LED / 4.8VA	150	3000K	Yes	Stainless Steel	Stainless Steel	Clear Optic
15084 SS	D15074/84	2.5w LED / 3VA	50	3000K	Yes	Stainless Steel	Stainless Steel	Clear Optic
15085 SS	D15075/85	4w LED / 4.8VA	150	3000K	Yes	Stainless Steel	Stainless Steel	Clear Optic

40,000 hour lifespan. Suitable for use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Constructed with 316 stainless steel. Rated for both indoor and outdoor use. IP67 outdoor rated. LED integrated components carry a 10-year limited warranty. Burial sleeve included.


PHOTOMETRIC GUIDE

15074 SS

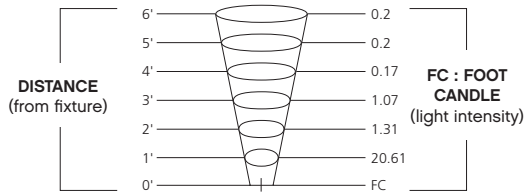


15074 SS
SHOWN WITH INCLUDED BURIAL SLEEVE

15075 SS

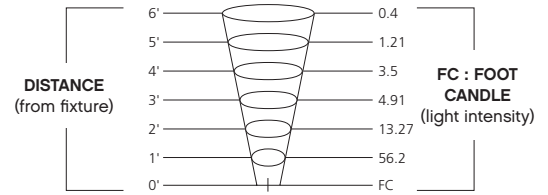


15075 SS
SHOWN WITH INCLUDED BURIAL SLEEVE

15084 SS

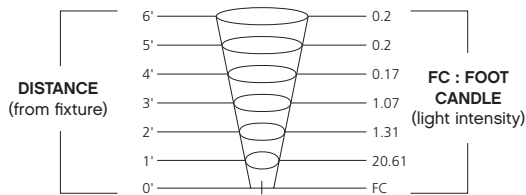

15084 SS
SHOWN WITH INCLUDED BURIAL SLEEVE

15085 SS

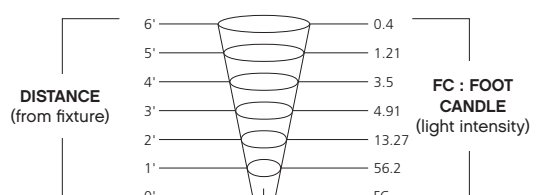


15085 SS
SHOWN WITH INCLUDED BURIAL SLEEVE

FLARE WELL LIGHTS


Flare's integrated LED indicator lighting available in either small or large uni-directional well lights, as well as small or large quad-directional well light options to ensure success on every project. Constructed with heavy duty cast 316 stainless steel, with a burial sleeve and concrete pour kit in a core drill size is included. Flare lights are drive-over rated up to 4000 lb.




15710 SS
UNI-DIRECTIONAL
WELL LIGHT
2¾" DIA. x 5¾" D

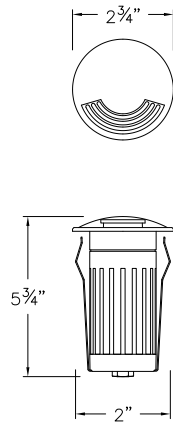


15712 SS
UNI-DIRECTIONAL
WELL LIGHT
7" DIA. x 7½" D

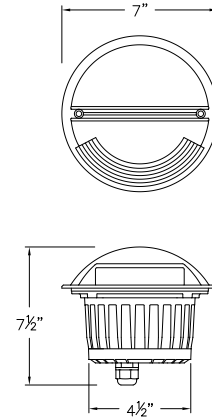

15740 SS
QUAD-DIRECTIONAL
WELL LIGHT
2¾" DIA. x 5¾" D

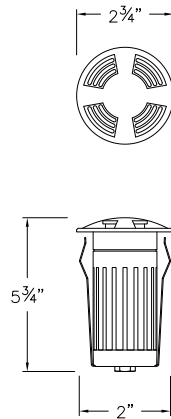

15742 SS
QUAD-DIRECTIONAL
WELL LIGHT
7" DIA. x 7½" D

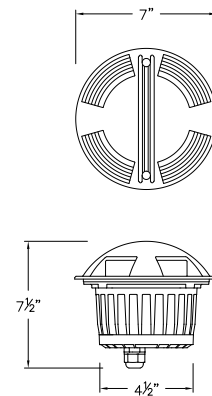

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15710 SS	D15710/40	4w LED / 4.8VA	10	3000K	No	Stainless Steel	Stainless Steel	Frosted
15712 SS	D15712/42	6w LED / 7.5VA	90	3000K	No	Stainless Steel	Stainless Steel	Frosted
15740 SS	D15710/40	4w LED / 4.8VA	10	3000K	No	Stainless Steel	Stainless Steel	Frosted
15742 SS	D15712/42	9.5w LED / 13VA	180	3000K	No	Stainless Steel	Stainless Steel	Frosted

40,000 hour lifespan. Suitable for use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Constructed with 316 stainless steel. Rated for both indoor and outdoor use. IP67 outdoor rated. LED integrated components carry a 10-year limited warranty. Burial/Concrete sleeve included.

PHOTOMETRIC GUIDE



15710 SS
SHOWN WITH INCLUDED BURIAL SLEEVE



15712 SS
SHOWN WITH INCLUDED BURIAL SLEEVE

PHOTOMETRICS

DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'
FOOT CANDLES	15710 SS	2.05	0.52	0.25	0.15
	15712 SS	23.81	5.90	3.81	2.46



15740 SS
SHOWN WITH INCLUDED BURIAL SLEEVE





15742 SS
SHOWN WITH INCLUDED BURIAL SLEEVE

PHOTOMETRICS


DISTANCE FROM LIGHT	LED ITEM	1'	2'	3'	4'
FOOT CANDLES	15740 SS	0.73	0.18	0.09	0.04
	15742 SS	14.81	4.21	2.75	2.16

TILT BRICK LIGHTS

Tilt's modern integrated LED well light is available in round or square options with cast 316 stainless steel housing and clear glass to cast a warm glow. With superior strength and performance, the ultra-modern design is rated for indoor and outdoor use to help you meet any application.

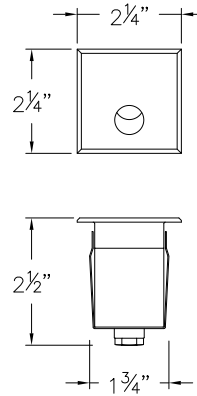


15242 SS
SQUARE STEP/WALL LIGHT
2 1/4" SQ. x 2 1/2" D

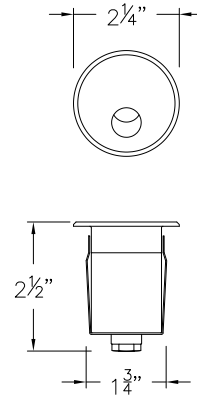

15252 SS
ROUND STEP/WALL LIGHT
2 1/4" DIA. x 2 1/2" D

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15242 SS	D15242/52	4w LED / 4.8VA	30	3000K	Yes	Stainless Steel	Stainless Steel	Clear
15252 SS	D15242/52	4w LED / 4.8VA	30	3000K	Yes	Stainless Steel	Stainless Steel	Clear

Suitable for use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Constructed with 316 stainless steel. Rated for both indoor and outdoor use. IP67 outdoor rated. LED integrated components carry a 10-year limited warranty. 4" burial sleeve included.

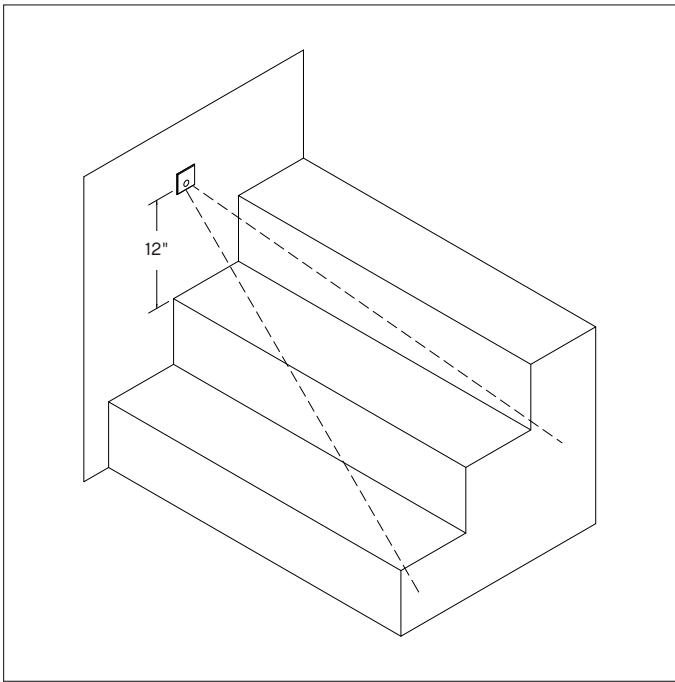

DESIGN NOTE


Exceptionally dimmable and directional light safely illuminates steps and walkways.




15242 SS



PHOTOMETRIC GUIDE

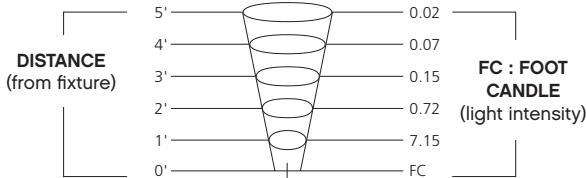

15252 SS

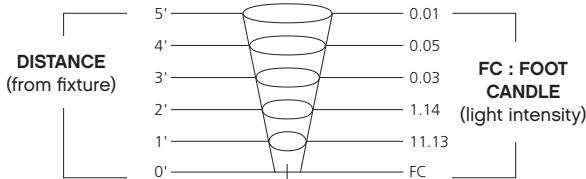

DASH BRICK LIGHTS


Dash LED brick lights deliver sleek style, safety and security in a powerful package. Available in small and large sizes, as well as flat and louvered versions. Dash has a cast 316 stainless steel face plate equipped with frosted glass for soft illumination.



15334 SS
SMALL LOUVERED BRICK LIGHT
6¼" W x 3¼" H x 3½" D




SHOWN WITH INCLUDED
MOUNTING BOX

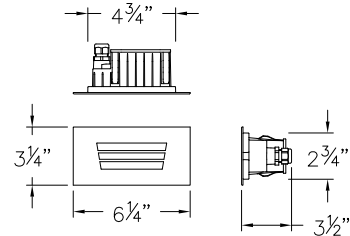

15344 SS
SMALL FLAT BRICK LIGHT
6¼" W x 3¼" H x 3½" D



SHOWN WITH INCLUDED
MOUNTING BOX

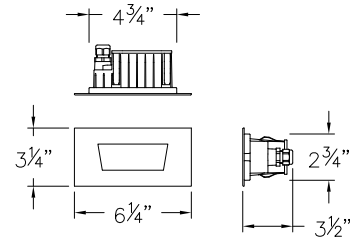

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15334 SS	D15334/44	5w LED / 6.8VA	80	3000	Yes	Stainless Steel	Stainless Steel	Frosted
15344 SS	D15334/44	5w LED / 6.8VA	65	3000	Yes	Stainless Steel	Stainless Steel	Frosted

40,000-hour lifespan. Suitable for use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Constructed with 316 stainless steel. Rated for both indoor and outdoor use. IP65 outdoor rated. LED integrated components carry a 10-year limited warranty. The included mounting box is required for installation.


PHOTOMETRICS														
DISTANCE FROM LIGHT		ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
FOOT CANDLES	12" Front	15334 SS	4.84	1.89	0.76	0.35	0.21	0.12	0.1	0.06	0.04	0.03	0.02	0.01
	12" Side		0.41	0.09	0.01									
	18" Front		2.72	1.56	0.66	0.35	0.22	0.15	0.11	0.07	0.05	0.03	0.01	
	18" Side		0.42	0.13	0.01									
	12" Front	15344 SS	5.71	2.46	1.08	0.52	0.3	0.19	0.14	0.1	0.08	0.05	0.03	
	12" Side		0.32	0.12	0.02	0.01								
	18" Front		3.08	1.82	0.93	0.46	0.29	0.19	0.13	0.09	0.08	0.06	0.05	0.04
	18" Side		0.32	0.06	0.02	0.01								



15335 SS
LARGE LOUVERED BRICK LIGHT
10" W x 3" H x 3/4" D




SHOWN WITH INCLUDED MOUNTING BOX

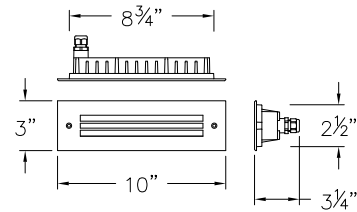

15345 SS
LARGE FLAT BRICK LIGHT
10" W x 3" H x 3/4" D



SHOWN WITH INCLUDED MOUNTING BOX

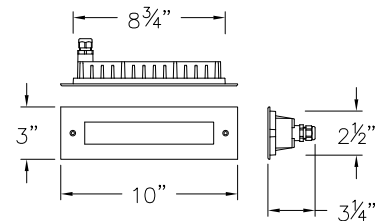


LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15335 SS	D15335/45	7w LED / 9.5VA	80	3000	Yes	Stainless Steel	Stainless Steel	Frosted
15345 SS	D15335/45	7w LED / 9.5VA	175	3000	Yes	Stainless Steel	Stainless Steel	Frosted

40,000-hour lifespan. Suitable for use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Constructed with 316 stainless steel. Rated for both indoor and outdoor use. IP65 outdoor rated. LED integrated components carry a 10-year limited warranty. The included mounting box is required for installation.

PHOTOMETRICS														
DISTANCE FROM LIGHT		ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
FOOT CANDLES	12" Front	15335 SS	4.16	2.68	1.07	0.69	0.45	0.28	0.25	0.2	0.16	0.08	0.06	0.03
	12" Side		0.28	0.11	0.02	0.01								
	18" Front		1.6	1.54	0.95	0.6	0.38	0.29	0.23	0.18	0.15	0.11	0.09	
	18" Side		0.14	0.06	0.01									
	12" Front	15345 SS	9.65	4.14	2.27	1.06	0.64	0.44	0.35	0.27	0.23	0.13		
	12" Side		0.71	0.24	0.05	0.1								
	18" Front		4.81	3.08	1.93	1.1	0.82	0.49	0.33	0.27	0.22	0.16	0.13	
	18" Side		0.07	0.04	0.01									

MR16 SPOT LIGHTS

Choose your appropriate MR16 bulb. See page 133.



Anti-glare hex louvers available. See page 130.



1536 TXB-LL
4W MR16 LED SPOT LIGHT
1536 TXB
MR16 SPOT LIGHT
2½" DIA. SHROUD
5¾" W x 3¼" H




1536 SK-LL
4W MR16 LED SPOT LIGHT
1536 SK
MR16 SPOT LIGHT
2½" DIA. SHROUD
5¾" W x 3¼" H



1536 MZ-LL
HARDY ISLAND™
4W MR16 LED SPOT LIGHT
1536 MZ
HARDY ISLAND™
MR16 SPOT LIGHT
2½" DIA. SHROUD
5¾" W x 3¼" H



1536 BZ-LL
4W MR16 LED SPOT LIGHT
1536 BZ
MR16 SPOT LIGHT
2½" DIA. SHROUD
5¾" W x 3¼" H

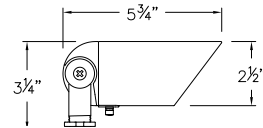


LED ITEM	LED LAMP (INCLUDED) / VOLT AMPS	COLOR TEMP.	DIMMABLE	ITEM	LED LAMP (NOT INCLUDED)	FINISH	CONSTRUCTION	LENS
1536 BZ-LL	4w MR16 LED / 5.7VA	2700K	Yes	1536 BZ	MR16 6w LED (max)	Bronze	Aluminum	Clear
1536 MZ-LL	4w MR16 LED / 5.7VA	2700K	Yes	1536 MZ	MR16 6w LED (max)	Matte Bronze	Solid Brass	Clear
1536 SK-LL	4w MR16 LED / 5.7VA	2700K	Yes	1536 SK	MR16 6w LED (max)	Satin Black	Aluminum	Clear
1536 TXB-LL	4w MR16 LED / 5.7VA	2700K	Yes	1536 TXB	MR16 6w LED (max)	Textured Brown	Aluminum	Clear

Photometrics for spot lights are based off lamp photometrics, see page 133. See page 133-134 for LED conversion lamps. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For integrated LumaCORE product, see page 59.


MR16 SPOT LIGHTS

Choose your appropriate MR16 bulb. See page 133.



Anti-glare hex louvers available. See page 130.

ACCENT LIGHTING

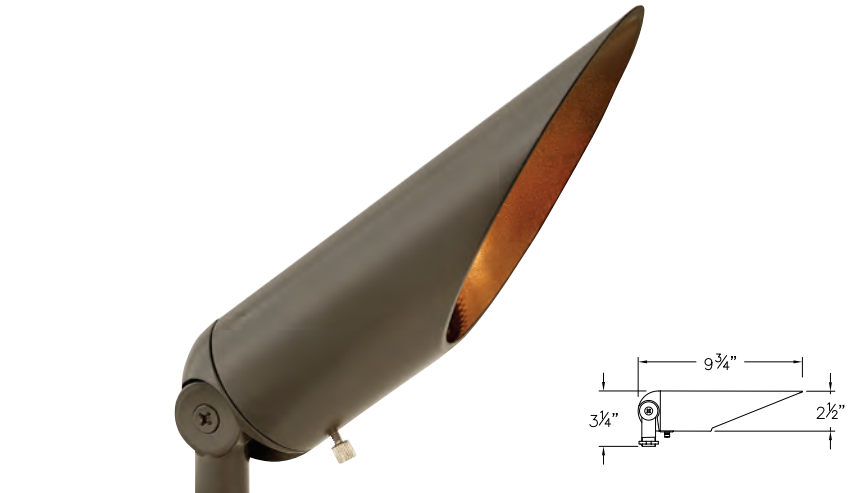

1535 BZ
MR16 SPOT LIGHT
2 1/2" DIA. SHROUD
9 3/4" W x 3 1/4" H

DESIGN NOTE | 1536 BZDN is down light only



1536 BZDN
MR16 DOWN LIGHT
2 1/2" DIA. SHROUD
5 3/4" W x 3 1/4" H

Optional mounting accessories for 1536 BZDN (not included):
Surface mount, 0015 BZ
or tree mount, 0021 BZ



0015 BZ
SURFACE MOUNT



0021 BZ
TREE MOUNT

ITEM	LED LAMP (NOT INCLUDED)	FINISH	CONSTRUCTION	LENS
1535 BZ	1-8w MR16 LED; 12w Equiv.	Bronze	Aluminum	Clear
1536 BZDN	1-8w MR16 LED; 12w Equiv.	Bronze	Aluminum	Hex Louver*



*Includes Hex Louver lens for down light use only. Optional performance lenses available, see page 130. See page 133-134 for LED conversion lamps. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For integrated LumaCORE product, see page 59.




HARDY ISLAND ACCENT LIGHTS



HARDY ISLAND

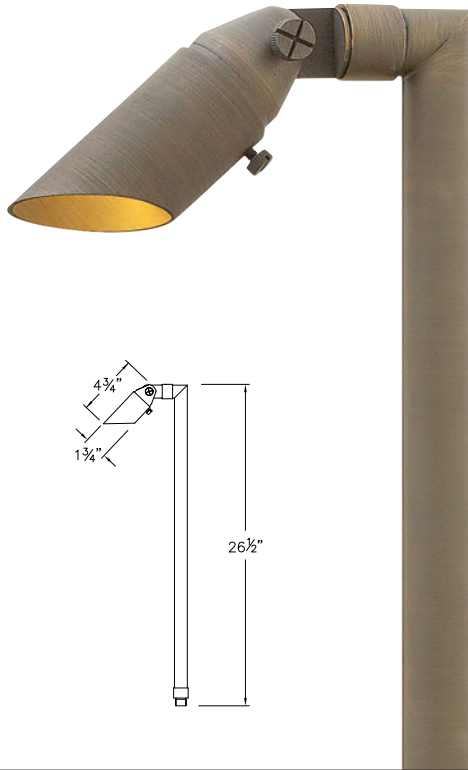


16501 MZ
16501 MZ-27K60
 HARDY ISLAND™
 SPOT LIGHT
 1 3/4" DIA. SHROUD
 4 3/4" W x 2 1/2" H

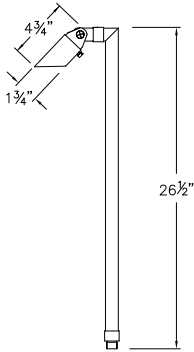

16507 MZ
16507 MZ-27K60
 HARDY ISLAND™
 SPOT LIGHT & STEM
 1 3/4" DIA. SHROUD
 4 3/4" W x 26 1/2" H



DESIGN NOTE | 16571 is oval in shape

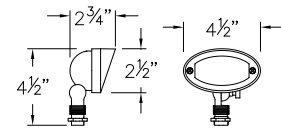

16571 MZ-LL
 HARDY ISLAND™ SMALL
 WALL WASH FLOOD LIGHT
 4 1/2" W x 2 1/2" H SHROUD
 2 3/4" W x 4 1/2" H






LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	ITEM	LAMP (NOT INCLUDED)	FINISH	CONST.	LENS
16501 MZ-27K60	MR827K	1-2.5w MR8 LED / 3VA	2700K	No	16501 MZ	MR8 LED 4w LED (max)	Matte Bronze	Brass	Clear
16507 MZ-27K60	MR827K	1-2.5w MR8 LED / 3VA	2700K	No	16507 MZ	MR8 LED 4w LED (max)	Matte Bronze	Brass	Clear
16571 MZ-LL	EA-LMW-2.5W	1-2.5w Mini Wedge LED / 3.8VA	2700K	Yes			Matte Bronze	Brass	Frosted

Photometrics for spot lights are based off lamp photometrics, see page 134. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.



ACCENT + FLOOD LIGHTS

Choose your appropriate MR16 bulb. See page 133.

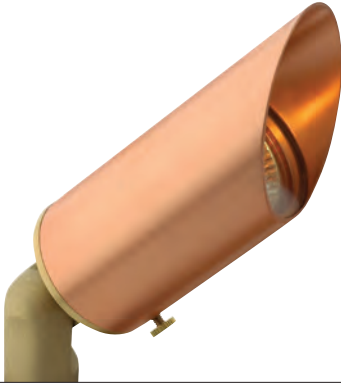

1583 NC
MR16 COPPER SPOT LIGHT
2 1/4" DIA. SHROUD
7" W x 3" H

1530 BZ
MR11 SPOT LIGHT
1 3/4" DIA. SHROUD
3 3/4" W x 2 1/2" H

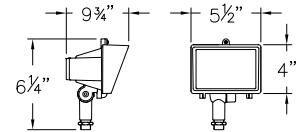

1539 BS
MR16 BRASS SUBMERSIBLE
POND LIGHT
3 3/4" DIA. SHROUD
5" W x 4 1/2" H
(SUPPLIED WITH 25' LEAD CABLE)



1521 BZ
FLOOD LIGHT
WITH FROSTED LENS
5 1/2" W x 4" H SHROUD
5" W x 6 1/4" H

ITEM	LAMP (NOT INCLUDED)	FINISH	CONSTRUCTION	LENS
1521 BZ	MR16 6w LED (max)	Bronze	Aluminum	Frosted
1530 BZ	MR8 4w LED (max)	Bronze	Aluminum	Clear
1539 BS	MR16 6w LED (max)	Brass	Solid Brass	Clear
1583 NC	MR16 6w LED (max)	Natural Copper	Copper and Brass	Clear

See Hinkley.com for photometric data. See pages 133-134 for LED conversion lamps. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.

MR16 FLOOD LIGHTS




15300 BZ-LL
MR16 FLOOD LIGHT
4½" W x 4" H x 4½" D




15300 MZ-LL
HARDY ISLAND™
MR16 FLOOD LIGHT
4½" W x 4" H x 4½" D



15300 SK-LL
MR16 FLOOD LIGHT
4½" W x 4" H x 4½" D

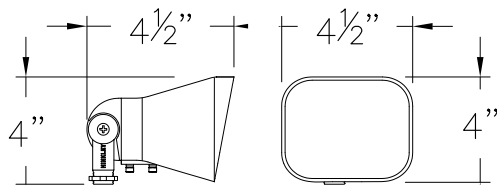

 LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15300 BZ-LL	4WLEDMR16	1-4w MR16 LED / 5.7VA	2700	Yes	Bronze	Aluminum	Frosted
15300 MZ-LL	4WLEDMR16	1-4w MR16 LED / 5.7VA	2700	Yes	Matte Bronze	Brass	Frosted
15300 SK-LL	4WLEDMR16	1-4w MR16 LED / 5.7VA	2700	Yes	Satin Black	Aluminum	Frosted

See Hinkley.com for photometric data. See pages 133-134 for LED conversion lamps. A wiring kit and ground spike (0014 BZ, page 130) are supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.

MR16 LED WELL LIGHTS

FEATURES + BENEFITS




- ACCEPTS LED MR16 LAMPS
- LAMP TILT +/- 20°
- BURIAL SLEEVE AND CONCRETE KIT INCLUDED
- OPTIONAL HEX LOUVER LENS AVAILABLE, 0037HL
- COMES WITH STANDARD AND SORRA SPECIFIC LAMP GRIP



Well lights come with a PVC constructed concrete pour kit. Includes a dense foam cap to prevent concrete from entering.

4 1/8" DIA. x 5" H

Choose your appropriate MR16 bulb. See page 133.

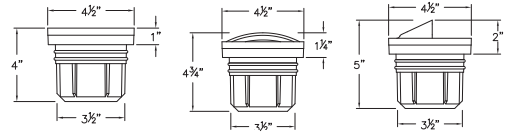


TILT ADJUSTABLE
+/- 20°



15702 BZ
FLAT TOP WELL LIGHT
4 1/2" DIA. x 4" H x 1" H TOP
3 1/2" DIA. BASE

15702 MZ
HARDY ISLAND™
FLAT TOP WELL LIGHT
4 1/2" DIA. x 4" H x 1" H TOP
3 1/2" DIA. BASE

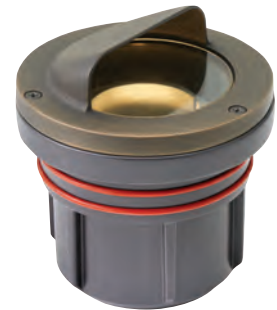

15705 BZ
GRILL TOP WELL LIGHT
4 3/4" DIA. x 4 3/4" H x 1 1/4" H TOP
3 1/2" DIA. BASE

15705 MZ
HARDY ISLAND™
GRILL TOP WELL LIGHT
4 3/4" DIA. x 4 3/4" H x 1 1/4" H TOP
3 1/2" DIA. BASE



15708 BZ
SHIELDED WELL LIGHT
4 1/2" DIA. x 5" H x 2" H TOP
3 1/2" DIA. BASE

15708 MZ
HARDY ISLAND™
SHIELDED WELL LIGHT
4 1/2" DIA. x 5" H x 2" H TOP
3 1/2" DIA. BASE



ITEM	LED LAMP (NOT INCLUDED)	FINISH	CONSTRUCTION	LENS
15702 BZ*, MZ*	MR16 12w LED (max)	Bronze, Matte Bronze	Aluminum, Brass and Aluminum	Clear
15705 BZ, MZ	MR16 12w LED (max)	Bronze, Matte Bronze	Aluminum, Brass and Aluminum	Clear
15708 BZ, MZ	MR16 12w LED (max)	Bronze, Matte Bronze	Aluminum, Brass and Aluminum	Clear

*15702 is drive over rated up to 4,500 lbs. A wiring kit is supplied. Photometrics for well lights are based off lamp photometrics, see page 133. For accessories, see pages 129-130. For transformers, see pages 127-128. For Variable Output LumaCORE product, see page 61.



MR16 LED WELL LIGHTS


Choose your appropriate MR16 bulb. See page 133.




Well lights come with an easy installation, anti-corrosion PVC burial sleeve. (Can install into concrete)



4 1/8" DIA. x 5" H
3" DIA. BASE



16701 MZ
HARDY ISLAND™ FLAT TOP WELL LIGHT
3 3/4" DIA. x 3 3/4" H x 1/2" H TOP
2 1/2" DIA. BASE




16704 MZ
HARDY ISLAND™ GRILL TOP WELL LIGHT
3 3/4" DIA. x 4" H x 1" H TOP
2 1/2" DIA. BASE




DESIGN NOTE

16710 MZ features three openings



16707 MZ
HARDY ISLAND™ EYEBROW WELL LIGHT
3 3/4" DIA. x 4 1/4" H x 1 1/2" H TOP
2 1/2" DIA. BASE



16710 MZ
HARDY ISLAND™ DIRECTIONAL WELL LIGHT
3 3/4" DIA. x 4 3/4" H x 1" H TOP
2 1/2" DIA. BASE



ITEM	MAX LED WATTAGE	FINISH	CONSTRUCTION	LENS
16701 MZ	MR16 4w LED (max)	Matte Bronze	Brass	Clear
16704 MZ	MR16 4w LED (max)	Matte Bronze	Brass	Clear
16707 MZ	MR16 4w LED (max)	Matte Bronze	Brass	Frosted
16710 MZ	MR16 4w LED (max)	Matte Bronze	Brass	Clear


A wiring kit is supplied. See page 133-134 for LED conversion lamps. For accessories, see pages 129-130. For transformers, see pages 127-128.

**DESIGN
NOTE**

One side is cut away for angling beam direction





LED PAR36 available, see page 131.

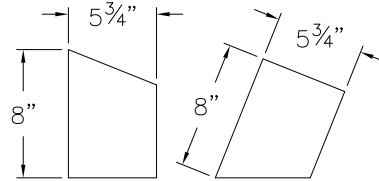

ACCENT LIGHTING

1598 BK
REVERSIBLE PAR36 WELL LIGHT
5 3/4" DIA. x 8" H

**TILT ADJUSTABLE
+/- 20°**



1598 MZ-FT
HARDY ISLAND™
FLAT TOP PAR36 WELL LIGHT
5 3/4" DIA. x 8" H



1598 MZ-RG
HARDY ISLAND™
ROCK GUARD PAR36 WELL LIGHT
6 1/4" DIA. x 9" H



ITEM	MAX LED WATTAGE	FINISH	CONSTRUCTION	LENS
1598 BK	PAR36 13w LED (max)	Black	PVC and Stainless Steel	
1598 MZ-FT	PAR36 13w LED (max)	Matte Bronze	PVC and Brass	Clear
1598 MZ-RG	PAR36 13w LED (max)	Matte Bronze	PVC and Brass	Clear

A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. LED PAR36 sold separately, see page 131 for more details.

CALDER TWINKLE LIGHTS

DESIGN NOTE

Calder's perforated metal pattern allows ambient illumination in outdoor gathering spaces such as patios, pergolas, gazebos, and trees. Achieve a statement lighting design by grouping low voltage Calder pendants in multiples.



1511 BZ
3½" DIA. x 7" H



1512 BZ
3¼" DIA. x 7" H

LED ITEM	LED LAMP (INCLUDED)	LED WATTAGE / VOLT AMPS	DIMMABLE	FINISH	CONSTRUCTION	CANOPY	WIRE/ CHAIN
1511 BZ	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	Yes	Bronze	Aluminum	3½" Dia.	6', 5'
1512 BZ	00T5-27LED-1.5	1-1.5w T5 LED / 1.8VA	Yes	Bronze	Aluminum	3½" Dia.	6', 5'

A wiring kit is supplied. Photometrics are based off lamp photometrics, see page 134. For accessories, see pages 129-130. For transformers, see pages 127-128. For complete product details and LED specifications, refer to Hinkley.com.







DECK, STEP + PATIO LIGHTING

STEP INTO SAFETY

Engineered with the durability to withstand the elements, Hinkley Deck, Step, and Patio lighting is essential for adding a subtle glow to outdoor spaces that creates a smooth transition from inside to out. Created to complement other Hinkley styles, our integrated hardscape lighting and sleek-profiled sconces have the decorative look that fits seamlessly into masonry or wood construction. Illuminating steps, posts, and railings can increase safety while being the perfect finishing touch to make an outdoor area feel complete.

NUVI DECK SCONCES

Nuvi offers exceptional 12V LED horizontal illumination due to its innovative composite optic technology. Constructed of durable, solid vinyl, Nuvi is fit for harsh environments, offering resiliency and a long-life. A diverse range of mounting opportunities and easy installation ensure maximum flexibility. ETL rated for indoor/outdoor use.




15232 BK
ROUND DECK SCONCE
3" W x 3" H x 1" EXT.



15232 BZ
ROUND DECK SCONCE
3" W x 3" H x 1" EXT.



15232 MW
ROUND DECK SCONCE
3" W x 3" H x 1" EXT.

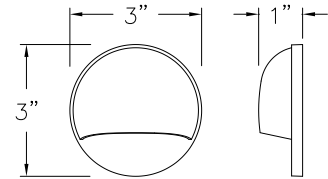


15222 BK
SQUARE DECK SCONCE
3" W x 3" H x 1" EXT.



15222 BZ
SQUARE DECK SCONCE
3" W x 3" H x 1" EXT.



15222 MW
SQUARE DECK SCONCE
3" W x 3" H x 1" EXT.

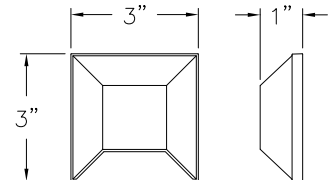

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION
15222 BK	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Black	Composite
15222 BZ	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Bronze	Composite
15222 MW	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Matte White	Composite
15232 BK	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Black	Composite
15232 BZ	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Bronze	Composite
15232 MW	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Matte White	Composite

40,000 hour lifespan. A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.

NUVI DECK SCONCES




15223 BK
SMALL RECTANGULAR
DECK SCONCE
2" W x 3/4" H x 1" EXT.



15223 BZ
SMALL RECTANGULAR
DECK SCONCE
2" W x 3/4" H x 1" EXT.




15223 MW
SMALL RECTANGULAR
DECK SCONCE
2" W x 3/4" H x 1" EXT.

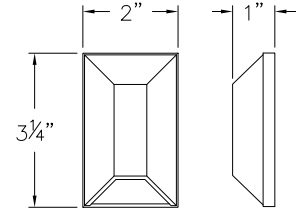

15225 BZ
MEDIUM RECTANGULAR
DECK SCONCE
5" W x 3" H x 1" EXT.



15225 MW
MEDIUM RECTANGULAR
DECK SCONCE
5" W x 3" H x 1" EXT.

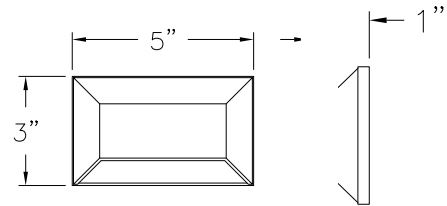


15225 BK
MEDIUM RECTANGULAR
DECK SCONCE
5" W x 3" H x 1" EXT.




LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION
15223 BK	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Black	Composite
15223 BZ	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Bronze	Composite
15223 MW	NX1	1.40w LED / 1.68VA	100	2700K	Yes	Matte White	Composite
15225 BK	E15225LED	1.90w LED / 1.9VA	220	2700K	Yes	Black	Composite
15225 BZ	E15225LED	1.90w LED / 1.9VA	220	2700K	Yes	Bronze	Composite
15225 MW	E15225LED	1.90w LED / 1.9VA	220	2700K	Yes	Matte White	Composite

40,000 hour lifespan. A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.


NUVI DECK SCONCES

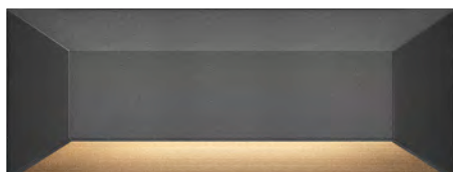

15228 BK
LARGE RECTANGULAR
DECK SCONCE
8" W x 3" H x 1" EXT.

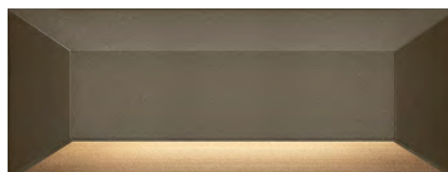

15228 BZ
LARGE RECTANGULAR
DECK SCONCE
8" W x 3" H x 1" EXT.

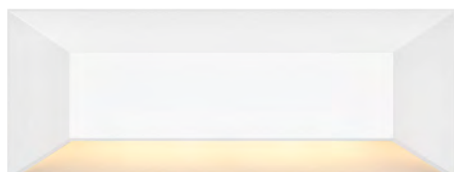


15228 MW
LARGE RECTANGULAR
DECK SCONCE
8" W x 3" H x 1" EXT.



DESIGN NOTE

Nuvi's small footprint and slim profile provide exceptional illumination for the smallest of spaces in decks, steps, and patio lighting

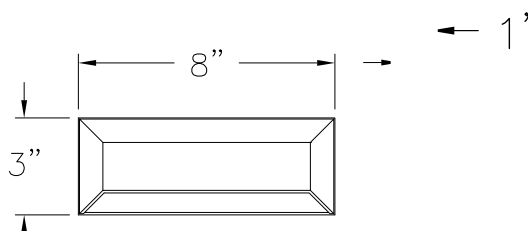


LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION
15228 BK	E15228LED	2.60w LED / 2.52VA	350	2700K	Yes	Black	Composite
15228 BZ	E15228LED	2.60w LED / 2.52VA	350	2700K	Yes	Bronze	Composite
15228 MW	E15228LED	2.60w LED / 2.52VA	350	2700K	Yes	Matte White	Composite

40,000 hour lifespan. A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.

NUVI HARDSCAPE



Nuvi offers exceptional 12V LED horizontal illumination due to its innovative composite optic technology. Constructed of durable, solid vinyl, Nuvi is fit for harsh environments, offering resiliency and a long-life. A diverse range of mounting opportunities and easy installation ensure maximum flexibility. ETL rated for indoor/outdoor use.

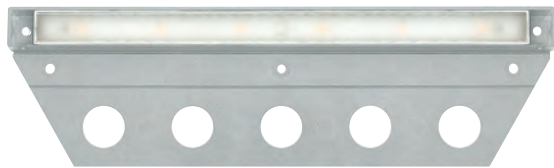

15448 TT
LARGE
DECK SCENCE
10" W x 3/4" H x 3" D
2 1/8" BRACKET DEPTH



15448 BZ
LARGE
DECK SCENCE
10" W x 3/4" H x 3" D
2 1/8" BRACKET DEPTH

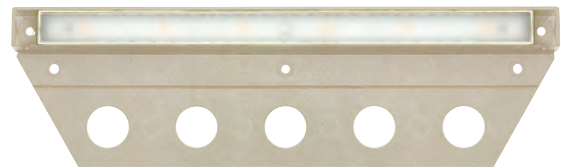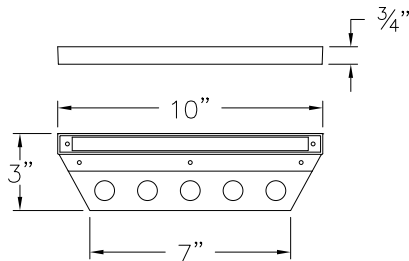

15448 ST
LARGE
DECK SCENCE
10" W x 3/4" H x 3" D
2 1/8" BRACKET DEPTH

DECK/STEP/PATIO

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15448 BZ	NX5	3.5w LED / 6VA	260	2700K	Yes	Bronze	Composite	Composite PC
15448 ST	NX5	3.5w LED / 6VA	260	2700K	Yes	Sandstone	Composite	Composite PC
15448 TT	NX5	3.5w LED / 6VA	260	2700K	Yes	Titanium	Composite	Composite PC

40,000 hour lifespan. For full warranty information, visit Hinkley.com. For accessories, see pages 129-130. For transformers, see pages 127-128.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'
FOOT CANDLES	12" Mounting	15448 BZ	28.3	6.94	3.01	1.65
	24" Mounting	15448 ST	14.1	6.08	3.05	1.71
	36" Mounting	15448 TT	7.56	4.46	2.73	1.79

NUVI™ HARDSCAPE SPACING RECOMMENDATIONS

MOUNTING HEIGHT	LED ITEM	CENTER TO CENTER
12"	15448 BZ	30"
24"	15448 ST	36"
36"	15448 TT	42"



NUVI HARDSCAPE 15446 BZ
PORTER 2805 DZ

NUVI HARDSCAPE




15444 ST
15444 ST-10
 SMALL
 DECK SCONCE
 3¼" W x ¾" H x 3" D
 2⅛" BRACKET DEPTH



15444 TT
15444 TT-10
 SMALL
 DECK SCONCE
 3¼" W x ¾" H x 3" D
 2⅛" BRACKET DEPTH



15444 BZ
15444 BZ-10
 SMALL
 DECK SCONCE
 3¼" W x ¾" H x 3" D
 2⅛" BRACKET DEPTH




15446 ST
15446 ST-10
 MEDIUM
 DECK SCONCE
 5" W x ¾" H x 3" D
 2⅛" BRACKET DEPTH



15446 TT
15446 TT-10
 MEDIUM
 DECK SCONCE
 5" W x ¾" H x 3" D
 2⅛" BRACKET DEPTH



15446 BZ
15446 BZ-10
 MEDIUM
 DECK SCONCE
 5" W x ¾" H x 3" D
 2⅛" BRACKET DEPTH



DECK/STEP/PATIO

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15444 BZ, 15444 BZ-10*	NX2	1.10w LED / 1.5VA	60	2700K	Yes	Bronze	Composite	Composite PC
15444 ST, 15444 ST-10*	NX2	1.10w LED / 1.5VA	60	2700K	Yes	Sandstone	Composite	Composite PC
15444 TT, 15444 TT-10*	NX2	1.10w LED / 1.5VA	60	2700K	Yes	Titanium	Composite	Composite PC
15446 BZ, 15446 BZ-10*	NX4	1.90w LED / 2.8VA	140	2700K	Yes	Bronze	Composite	Composite PC
15446 ST, 15446 ST-10*	NX4	1.90w LED / 2.8VA	140	2700K	Yes	Sandstone	Composite	Composite PC
15446 TT, 15446 TT-10*	NX4	1.90w LED / 2.8VA	140	2700K	Yes	Titanium	Composite	Composite PC

*Available as packages of 10. 40,000 hour lifespan. For full warranty information, visit Hinkley.com. For accessories, see pages 129-130. For transformers, see pages 127-128.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'
FOOT CANDLES	12" Mounting	15444 BZ	8.14	1.89	0.77	0.41
	24" Mounting	15444 ST	5.81	4.10	1.74	0.87
	36" Mounting	15444 TT	2.22	1.30	0.75	0.46
	12" Mounting	15446 BZ	20.42	10.33	5.35	2.91
	24" Mounting	15446 ST	4.80	4.45	3.61	2.02
	36" Mounting	15446 TT	2.15	2.24	2.03	1.31

HARDSCAPE SPACING RECOMMENDATIONS

MOUNTING HEIGHT	LED ITEM	CENTER TO CENTER
12"	15444 BZ	24"
24"	15444 ST	24"
36"	15444 TT	30"
12"	15446 BZ	24"
24"	15446 ST	30"
36"	15446 TT	36"

BRAVO HARDSCAPE

Bravo Hardscape Lighting has an ultra slim form that provides plenty of illumination. The low profile and various mounting opportunities make it the perfect light source for tight spaces, including on retainer walls, under stairs, and under built-in seating and handrails. The linear head rotates 150° for precise adjustments, helping you get the light exactly where you need it.




15556 MZ
HARDY ISLAND
BRAVO LED HARDSCAPE
4 1/4" W x 3/4" H x 3" D



DESIGN NOTE

Linear head rotates 150° for precise adjustments. Design incorporates a service wire loop.

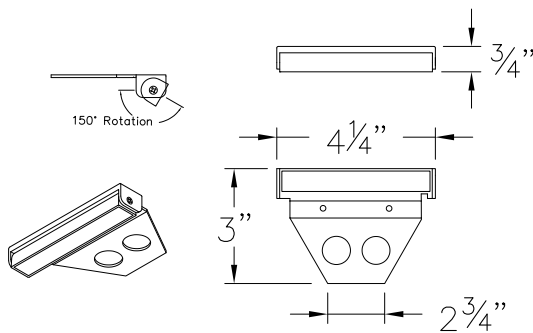

Shown in tilted installation configuration.

Service wire loop included.



LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15556 MZ	NX4	1.90w LED / 2.8VA	140	2700K	Yes	Matte Bronze	Brass & Composite	Composite PC

40,000 hour lifespan. A wiring kit is supplied. For transformers, see pages 127-128. For accessories, see pages 129-130. For transformers, see pages 127-128.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)


DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'
FOOT CANDLES	12" Mounting	15556 MZ	20.42	10.33	5.35	2.91
	24" Mounting		4.80	4.45	3.61	2.02
	36" Mounting		2.15	2.24	2.03	1.31




12V TAPER DECK SCONCES



1553 BZ
12V DECK SCONCE
4½" W x 3" H x 1" EXT.





1553 SK
12V DECK SCONCE
4½" W x 3" H x 1" EXT.




1553 SW
12V DECK SCONCE
4½" W x 3" H x 1" EXT.



1553 SW
(SIDE VIEW)

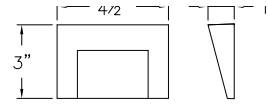

1557 BZ
12V DECK SCONCE
8" W x 3" H x 1" EXT.

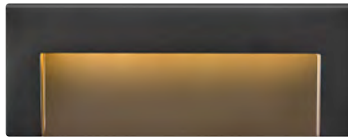

1557 SK
12V DECK SCONCE
8" W x 3" H x 1" EXT.



1557 SW
12V DECK SCONCE
8" W x 3" H x 1" EXT.



DECK/STEP/PATIO

LED ITEM	LED ENGINE (INTEGRATED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
1553 BZ	TP15	1.90w LED / 2.3VA	160	2700K	Yes	Bronze	Aluminum	Etched
1553 SK	TP15	1.90w LED / 2.3VA	160	2700K	Yes	Satin Black	Aluminum	Etched
1553 SW	TP15	1.90w LED / 2.3VA	160	2700K	Yes	Satin White	Aluminum	Etched
1557 BZ	TP25	2.5w LED / 3VA	300	2700K	Yes	Bronze	Aluminum	Etched
1557 SK	TP25	2.5w LED / 3VA	300	2700K	Yes	Satin Black	Aluminum	Etched
1557 SW	TP25	2.5w LED / 3VA	300	2700K	Yes	Satin White	Aluminum	Etched

40,000 hour lifespan. A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For coordinating Taper lanterns, see Hinkley.com.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
FOOT CANDLES	12" Mounting	1553 BZ	8.3	1.294	0.358	0.136	0.039	0.007				
	18" Mounting		10.64	1.989	0.555	0.218	0.076	0.029	0.004			
	12" Mounting	1553 SW	18.63	3.261	0.787	0.342	0.127	0.084	0.037	0.01		
	18" Mounting		12.6	3.62	1.461	0.644	0.309	0.189	0.103	0.067	0.032	0.003
	12" Mounting	1557 BZ	12.23	1.138	0.204	0.045						
	18" Mounting		10.46	2.113	0.655	0.212	0.064	0.026	0.011			
	12" Mounting	1557 SW	26.13	4.221	1.019	0.44	0.23	0.123	0.079	0.03	0.015	0.004
	18" Mounting		25.39	6.48	2.22	0.737	0.383	0.224	0.108	0.095	0.051	0.001

12V TAPER DECK SCONCES




1551 SW
12V DECK SCONCE
3" W x 8" H x 1½" EXT.



1551 BZ
12V DECK SCONCE
3" W x 8" H x 1½" EXT.



1551 SW
(SIDE VIEW)




1556 SW
12V DECK SCONCE
3" W x 4½" H x 1⅜" EXT.




1556 BZ
12V DECK SCONCE
3" W x 4½" H x 1⅜" EXT.



1556 BZ
(SIDE VIEW)



 LED ITEM	LED ENGINE (INTEGRATED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
1551 SW	TP10	1.20w LED / 1.5VA	90	2700K	Yes	Satin White	Aluminum	Etched
1551 BZ	TP10	1.20w LED / 1.5VA	90	2700K	Yes	Bronze	Aluminum	Etched
1556 SW	TP10	1.20w LED / 1.5VA	90	2700K	Yes	Satin White	Aluminum	Etched
1556 BZ	TP10	1.20w LED / 1.5VA	90	2700K	Yes	Bronze	Aluminum	Etched

40,000 hour lifespan. A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. For coordinating Taper lanterns, see Hinkley.com.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
FOOT CANDLES	18" Mounting	1551 BZ	10.13	3.334	1.228	0.49	0.23	0.112	0.07	0.035	0.024	0.002
	36" Mounting		3.35	2.104	1.205	0.665	0.383	0.245	0.165	0.117	0.075	0.045
	12" Mounting	1551 SW	10.13	3.334	1.228	0.49	0.23	0.112	0.07	0.035	0.024	0.002
	18" Mounting		3.35	2.104	1.205	0.665	0.383	0.245	0.165	0.117	0.075	0.045
	18" Mounting	1556 BZ	7.86	0.941	0.18	0.055	0.003					
	36" Mounting		5.12	1.291	0.332	0.117	0.05	0.008				
	12" Mounting	1556 SW	15.83	2.39	0.73	0.28	0.114	0.053	0.019			
	18" Mounting		7.67	2.79	0.838	0.415	0.199	0.106	0.054	0.001		



12V LUNA STEP LIGHTS




15508 SK
12V STEP LIGHT
4½" W x 3" H x 1½" D



15508 SW
12V STEP LIGHT
4½" W x 3" H x 1½" D



15508 MZ
12V STEP LIGHT
4½" W x 3" H x 1½" D

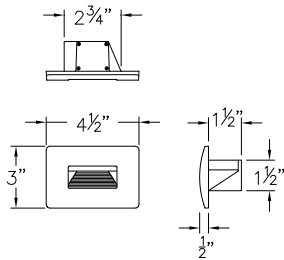

15508 BZ
12V STEP LIGHT
4½" W x 3" H x 1½" D



15508 TT
12V STEP LIGHT
4½" W x 3" H x 1½" D





LED ITEM	LED ENGINE (INTEGRATED)	MAX WATTAGE/ VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION
15508 BZ	LS-4	3.80w LED / 6.5VA	200	2700K	Yes	Bronze	Zinc Aluminum Alloy
15508 MZ	LS-4	3.80w LED / 6.5VA	200	2700K	Yes	Matte Bronze	Forged Brass Face Plate
15508 SK	LS-4	3.80w LED / 6.5VA	200	2700K	Yes	Satin Black	Zinc Aluminum Alloy
15508 SW	LS-4	3.80w LED / 6.5VA	200	2700K	Yes	Satin White	Zinc Aluminum Alloy
15508 TT	LS-4	3.80w LED / 6.5VA	200	2700K	Yes	Titanium	Zinc Aluminum Alloy

40,000 hour lifespan. A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.


PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	
FOOT CANDLES	8" Mounting	15508 SK	3.58	0.71	0.2						
	16" Mounting			0.86	0.38	0.15					
	30" Mounting				0.27	0.24	0.13				
	8" Mounting	15508 BZ	3.58	0.71	0.2						
	16" Mounting			0.86	0.38	0.15					
	30" Mounting				0.27	0.24	0.13				
	8" Mounting	15508 MZ	3.58	0.71	0.20						
	16" Mounting			0.86	0.38	0.15					
	30" Mounting				0.27	0.24	0.13				
	8" Mounting	15508 SW	7	2.19	0.97	0.57	0.37	0.26	0.19	0.14	
	16" Mounting			0.66	0.158	0.85	0.5	0.32	0.23	0.16	0.12
	30" Mounting				0.32	0.52	0.43	0.3	0.23	0.16	0.12
8" Mounting	15508 TT	4.5	1.8	0.45	0.25	0.15	0.11				
16" Mounting				1.03	0.54	0.27	0.15	0.1			
30" Mounting					0.32	0.29	0.19	0.12			


DECK LIGHTS




16805 MZ-LED
HARDY ISLAND™ TRIANGULAR
DECK SCONCE
3½" DIA. x 2" H x 1¾" EXT.



1542 BZ-LED
VERTICAL DECK LIGHT
3¼" W x 4¾" H x 2¾" D



16801 MZ-LL
HARDY ISLAND™ ROUND
EYEBROW DECK SCONCE
3½" DIA. x 2" EXT.

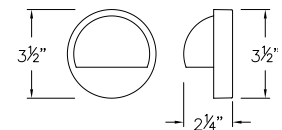

16804 MZ-LL
HARDY ISLAND™ ROUND
LOUVERED DECK SCONCE
3½" DIA. x 2" EXT.



DECK/STEP/PATIO

LED ITEM	LED ENGINE / LAMP (INCLUDED)	MAX WATTAGE/ VOLT AMPS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
1542 BZ-LED	E5050LED	1.5w LED / 3.9VA	2700K	Yes	Bronze	Aluminum	Frosted
16801 MZ-LL	00T3-27LED	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Brass	Frosted
16804 MZ-LL	00T3-27LED	1-1.5w T3 LED / 1.8VA	2700K	Yes	Matte Bronze	Brass	Frosted
16805 MZ-LED	E5050LED	1.5w LED / 3.9VA	2700K	Yes	Matte Bronze	Brass	Frosted

See pages 133-134 for LED lamps. A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'
FOOT CANDLES	6" Mounting	1542 BZ-LED	1.44	0.30	0.10	0.03	0.06		
	18" Mounting		0.83	0.38	0.19	0.09	0.06	0.03	
	30" Mounting		0.35	0.28	0.18	0.12	0.07	0.05	0.03
	6" Mounting	16801 MZ-LL	1.63	0.22	0.03				
	18" Mounting		0.23	0.36	0.14	0.03	0.01		
	30" Mounting		0.07	0.19	0.13	0.07	0.04	0.01	
	6" Mounting	16804 MZ-LL	1.87	0.16	0.01				
	18" Mounting		1.08	0.54	0.15	0.02	0.01		
	30" Mounting		0.02	0.23	0.21	0.1	0.04	0.01	
	6" Mounting	16805 MZ-LED	4.40	2.48	0.68	0.10			
	18" Mounting		10.84	5.10	1.64	0.22	0.13	0.04	
	30" Mounting		4.83	3.42	1.93	0.81	0.25	0.12	0.09

BRICK LIGHT 1594 BZ
HARBOR 2574 AR-LV





BRICK + DECK LIGHTS



1546 MZ-LL
HARDY ISLAND™
HORIZONTAL LED DECK LIGHT
4¾" W x 3¼" H x 2½" D




1546 BZ-LL
HORIZONTAL LED DECK LIGHT
4¾" W x 3¼" H x 2½" D

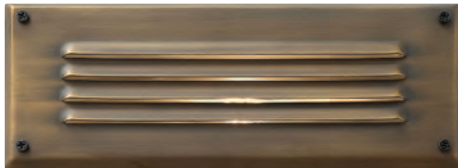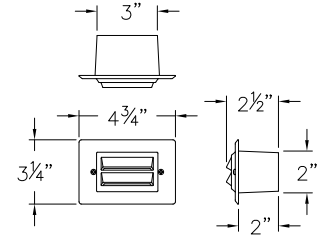

1594 MZ-LL
HARDY ISLAND™
LOUVERED BRICK LIGHT
8¾" W x 3¼" H x 3¾" D



1594 BZ-LL
LOUVERED BRICK LIGHT
8¾" W x 3¼" H x 3¾" D



DECK/STEP/PATIO

LED ITEM	LED LAMP (INCLUDED)	MAX WATTAGE / VOLT AMPS	COLOR TEMP.	HALOGEN EQUIV.	FINISH	CONSTRUCTION	LENS
1546 BZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	25w	Bronze	Aluminum Face Plate	Frosted
1546 MZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	25w	Matte Bronze	Solid Brass Face Plate	Frosted
1594 BZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	25w	Bronze	Aluminum Face Plate	Clear
1594 MZ-LL	EA-LMW-1.5W	1-1.5w Mini Wedge LED / 2.5VA	2700K	25w	Matte Bronze	Solid Brass Face Plate	Clear

See pages 133-134 for LED lamps. A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
FOOT CANDLES	6" Mounting	1546 BZ-LL	2.9	0.2	0.09	0.01						
	18" Mounting		0.77	0.67	0.15	0.05	0.01					
	30" Mounting		0.14	0.44	0.37	0.14	0.04	0.01				
	6" Mounting	1546 MZ-LL	0.46	0.02	0.01							
	18" Mounting		0.76	0.28	0.02	0.01						
	30" Mounting		0.29	0.28	0.09	0.01						
	6" Mounting	1594 BZ-LL	1.02	0.02	0.01	0.04	0.01					
	18" Mounting		0.56	0.29	0.43	0.12	0.01					
	30" Mounting		0.23	0.3	0.16	0.02	0.07					
	6" Mounting	1594 MZ-LL	2.33	0.78	0.45	0.15	0.02	0.01				
	18" Mounting		0.15	0.45	0.14	0.28	0.29	0.09	0.04	0.01		
	30" Mounting		0.03	0.08	0.28	0.09	0.06	0.14	0.15	0.05	0.03	0.01



DASH BRICK LIGHTS 15335 SS
FOUNDRY 10514 TK



SPARTA

STAINLESS STEEL

EXPAND YOUR HORIZONS

Explore Sparta's sleek, contemporary collection and imagine the possibilities.

The ultra-modern Sparta series is constructed from solid stainless steel alloy for virtually indestructible lighting. Four robust designs are expertly engineered to deliver water-tight fixtures that ensure flexibility for a variety of applications.

EASY TO SET UP AND ENJOY

Simply pair Sparta fixtures with a Hinkley low-voltage transformer and voila! Hinkley transformers feature 12V and 15V multi-tap outputs for superior strength and performance.

SPARTA SNAPSHOT



Construction: 316 Stainless Steel | **Power:** 12V | **Color Temperature:** 3000K

Suitable For: Use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Meets United States UL Underwriters Laboratories & CSA Canadian Standards Association Product Safety Standards. Integrated LED components carry a 10-year limited warranty. Please refer to Hinkley's Warranty for complete product warranty details as some warranty limitations may apply.


Transformer is required.

TILT BRICK LIGHTS

Tilt's modern integrated LED well light is available in round or square options with cast 316 stainless steel housing and clear glass to cast a warm glow. With superior strength and performance, the ultra-modern design is rated for indoor and outdoor use to help you meet any application.

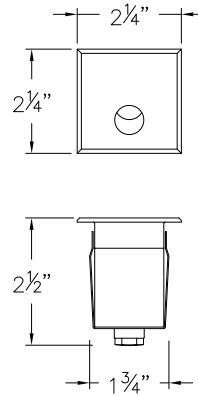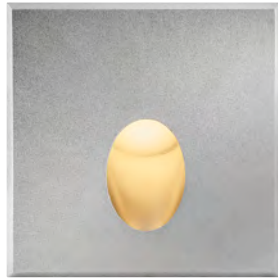


15242 SS
SQUARE STEP/WALL LIGHT
2 1/4" SQ. x 2 1/2" D

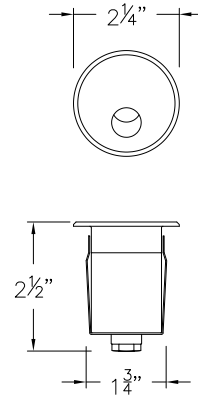

15252 SS
ROUND STEP/WALL LIGHT
2 1/4" DIA. x 2 1/2" D

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15242 SS	D15242/52	4w LED / 4.8VA	30	3000K	Yes	Stainless Steel	Stainless Steel	Clear
15252 SS	D15242/52	4w LED / 4.8VA	30	3000K	Yes	Stainless Steel	Stainless Steel	Clear

Suitable for use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Constructed with 316 stainless steel. Rated for both indoor and outdoor use. IP67 outdoor rated. LED integrated components carry a 10-year limited warranty. 4" burial sleeve included.

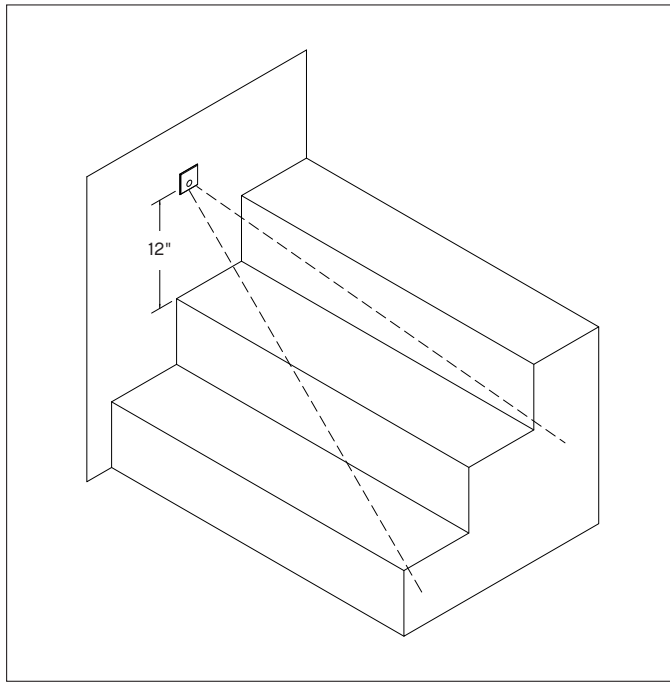



DESIGN NOTE

Exceptionally dimmable and directional light safely illuminates steps and walkways.


PHOTOMETRIC GUIDE



15242 SS

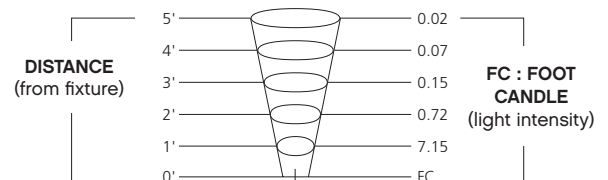

15252 SS

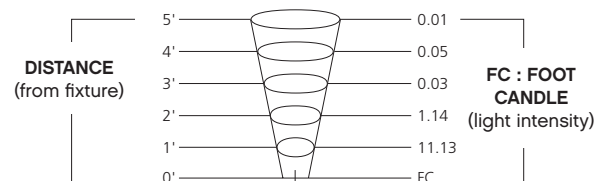

DASH BRICK LIGHTS


Dash LED brick lights deliver sleek style, safety and security in a powerful package. Available in small and large sizes, as well as flat and louvered versions. Dash has a cast 316 stainless steel face plate equipped with frosted glass for soft illumination.



15334 SS
SMALL LOUVERED BRICK LIGHT
6¼" W x 3¼" H x 3½" D




SHOWN WITH INCLUDED
MOUNTING BOX



15344 SS
SMALL FLAT BRICK LIGHT
6¼" W x 3¼" H x 3½" D



SHOWN WITH INCLUDED
MOUNTING BOX



LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15334 SS	D15334/44	5w LED / 6.8VA	80	3000	Yes	Stainless Steel	Stainless Steel	Frosted
15344 SS	D15334/44	5w LED / 6.8VA	65	3000	Yes	Stainless Steel	Stainless Steel	Frosted

40,000-hour lifespan. Suitable for use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Constructed with 316 stainless steel. Rated for both indoor and outdoor use. IP65 outdoor rated. LED integrated components carry a 10-year limited warranty. The included mounting box is required for installation.



PHOTOMETRICS														
DISTANCE FROM LIGHT		ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
FOOT CANDLES	12" Front	15334 SS	4.84	1.89	0.76	0.35	0.21	0.12	0.1	0.06	0.04	0.03	0.02	0.01
	12" Side		0.41	0.09	0.01									
	18" Front		2.72	1.56	0.66	0.35	0.22	0.15	0.11	0.07	0.05	0.03	0.01	
	18" Side		0.42	0.13	0.01									
	12" Front	15344 SS	5.71	2.46	1.08	0.52	0.3	0.19	0.14	0.1	0.08	0.05	0.03	
	12" Side		0.32	0.12	0.02	0.01								
	18" Front		3.08	1.82	0.93	0.46	0.29	0.19	0.13	0.09	0.08	0.06	0.05	0.04
	18" Side		0.32	0.06	0.02	0.01								



15335 SS
LARGE LOUVERED BRICK LIGHT
 10" W x 3" H x 3/4" D





SHOWN WITH INCLUDED MOUNTING BOX



15345 SS
LARGE FLAT BRICK LIGHT
 10" W x 3" H x 3/4" D



SHOWN WITH INCLUDED MOUNTING BOX



DECK/STEP/PATIO

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE / VOLT AMPS	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	LENS
15335 SS	D15335/45	7w LED / 9.5VA	80	3000	Yes	Stainless Steel	Stainless Steel	Frosted
15345 SS	D15335/45	7w LED / 9.5VA	175	3000	Yes	Stainless Steel	Stainless Steel	Frosted

40,000-hour lifespan. Suitable for use in wet (outdoor direct rain or sprinkler) locations as defined by NEC and CEC. Constructed with 316 stainless steel. Rated for both indoor and outdoor use. IP65 outdoor rated. LED integrated components carry a 10-year limited warranty. The included mounting box is required for installation.

PHOTOMETRICS														
DISTANCE FROM LIGHT		ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
FOOT CANDLES	12" Front	15335 SS	4.16	2.68	1.07	0.69	0.45	0.28	0.25	0.2	0.16	0.08	0.06	0.03
	12" Side		0.28	0.11	0.02	0.01								
	18" Front		1.6	1.54	0.95	0.6	0.38	0.29	0.23	0.18	0.15	0.11	0.09	
	18" Side		0.14	0.06	0.01									
	12" Front	15345 SS	9.65	4.14	2.27	1.06	0.64	0.44	0.35	0.27	0.23	0.13		
	12" Side		0.71	0.24	0.05	0.1								
	18" Front		4.81	3.08	1.93	1.1	0.82	0.49	0.33	0.27	0.22	0.16	0.13	
	18" Side		0.07	0.04	0.01									

CARSON 29700 VI-LV,
29705 VI-LV





12V LOW VOLTAGE LUXURY LIGHTING

HIGH STYLE

Decorative designs, superior craftsmanship, solid durability – our 12V Low Voltage Luxury Lighting is built to please. Each fixture brings the balance of functionality and style, while effortlessly coordinating with other Hinkley designs. Simply pair with a Hinkley low-voltage transformer and voila! A complete decorative lighting solution for every outdoor space.

RALEY 1601 OZ-LV
PIER BASE 1304 OZ



FEATURES + BENEFITS

- INNOVATIVE EXTERIOR 12-VOLT SOLUTION FOR ALL-IN-ONE LAMP, LIGHTING AND HIGH DESIGN LOOK
- VARIETY OF STYLISH FIXTURES CUSTOMIZED WITH VINTAGE FILAMENT LAMPS
- OFFERS SEMI-PERMANENT SOLUTIONS FOR UNIQUE AREAS SUCH AS PERGOLAS WHEN PAIRED WITH LOW-VOLTAGE HINKLEY TRANSFORMER
- 12-VOLT LED VINTAGE FILAMENT LAMPS INCLUDED

ESTATE SERIES 12V POST MOUNTS



2561 MB-LV (SHOWN)
2561 OZ-LV
 ALFORD PLACE
 Museum Black,
 Oil Rubbed Bronze
 10" W x 20¼" H
 2-3.5w Cand. LED



1671 BK-LV
 EDGEWATER
 Black
 10" DIA. x 21¼" H
 3-3.5w Cand. LED



1677 BK-LV
 EDGEWATER
 Black
 15" DIA. x 27¾" H
 4-3.5w Cand. LED



2687 DZ-LV (SHOWN)
2687 BK-LV
 LAKEHOUSE
 Aged Zinc, Black
 9" DIA. x 18¾" H
 1-3.5w Med. LED



2801 DZ-LV (SHOWN)
2801 OZ-LV
 PORTER
 Aged Zinc,
 Oil Rubbed Bronze
 6½" W x 22¾" H
 1-3.5w Med. LED



1601 OZ-LV (SHOWN)
1601 MB-LV
 RALEY
 Museum Black,
 Oil Rubbed Bronze
 11¼" DIA. x 26¼" H
 4-3.5w Cand. LED



1001 SI-LV (SHOWN)
1001 OZ-LV, 1001 BK-LV
 REPUBLIC
 Black, Oil Rubbed
 Bronze, Satin Nickel
 7" W x 17" H
 1-3.5w Med. LED



ESTATE SERIES 12V WALL MOUNTS



2684 BK-LV (SHOWN)
2684 DZ-LV
 LAKEHOUSE
 Black, Aged Zinc
 9" W x 17¼" H
 1-3.5w Med. LED




2574 AR-LV (SHOWN)
 HARBOR
 Anchor Bronze
 9" W x 13½" H
 1-3.5w Med. LED



1004 OZ-LV (SHOWN)
1004 BK-LV, 1004 SI-LV
 REPUBLIC
 Black, Oil Rubbed
 Bronze, Satin Nickel
 7" W x 16" H
 1-3.5w Med. LED

12V LED BULB SPECIFICATIONS



LED LAMP (INCLUDED)	BULB TYPE	LUMENS	COLOR TEMP.	CRI	WATTS CONSUMED	INCANDESCENT EQUIVALENCY	LIFESPAN
E12LED12V	Cand.	360	2700	80	3.5w	35w	15,000
E26LED12V	Med.	360	2700	80	3.5w	35w	15,000

For complete product details, LED specifications, posts and pier mounts, see hinkley.com. **Note:** Images are for reference purpose only and may not be pictured with the specified LED filament bulb. For more information on bulb specifications, see page 118. Transformer is required, see pages 127-128.

12V POST MOUNTS



1161 AH-LV (SHOWN)
1161 BK-LV
 ATWATER
 Ash Bronze, Black
 9½" W x 23" H
 1-3.5w Med. LED



2361 MB-LV (SHOWN)
2361 OZ-LV
 BROMLEY
 Museum Black,
 Oil Rubbed Bronze
 10" W x 22¾" H
 3-3.5w Cand. LED



1861 OZ-LV (SHOWN)
1861 TK-LV
 FREEPORT
 Oil Rubbed Bronze,
 Textured Black
 8" DIA. x 20½" H
 1-3.5w Med. LED



2121 MB-LV (SHOWN)
2121 CB-LV
 PLANTATION
 Museum Black,
 Copper Bronze
 10¼" DIA. x 25¼" H
 3-3.5w Cand. LED



2227 CB-LV
 PLANTATION
 Copper Bronze
 12½" DIA. x 29½" H
 4-3.5w Cand. LED



1901 SS-LV (SHOWN)
1901 MT-LV
 SATURN
 Metro Bronze,
 Stainless Steel
 10" DIA. x 21¾" H
 1-3.5w Med. LED




1321 BK-LV (SHOWN)
1321 KZ-LV
 SHELTER
 Black, Buckeye Bronze
 8¼" W x 27¾" H
 1-3.5w Med. LED

12V WALL MOUNTS



29700 VI-LV
 CARSON
 Vintage Iron
 10" W x 10½" H
 1-3.5w Cand. LED

12V LED BULB SPECIFICATIONS



LED LAMP (INCLUDED)	BULB TYPE	LUMENS	COLOR TEMP.	CRI	WATTS CONSUMED	INCANDESCENT EQUIVALENCY	LIFESPAN
E12LED12V	Cand.	360	2700	80	3.5w	35w	15,000
E26LED12V	Med.	360	2700	80	3.5w	35w	15,000

For complete product details, LED specifications, posts and pier mounts, see hinkley.com. **Note:** Images are for reference purpose only and may not be pictured with the specified LED filament bulb. For more information on bulb specifications, see page 118. Transformer is required, see pages 127-128.

ESTATE SERIES 12V PIER MOUNTS



17467 MB-LV (SHOWN)
17467 BLC-LV
 BEACON HILL
 Blackened Copper,
 Museum Black
 9½" W x 26¾" H
 3-3.5w Cand. LED



2576 AR-LV (SHOWN)
2576 SK-LV
 HARBOR
 Anchor Bronze,
 Satin Black
 11" W x 17" H
 1-3.5w Med. LED



1007 BK-LV (SHOWN)
1007 OZ-LV, 1007 SI-LV
 REPUBLIC
 Black, Oil Rubbed
 Bronze, Satin Nickel
 7" W x 16½" H
 1-3.5w Med. LED



1187 BLB-LV (SHOWN)
1187 SN-LV
 REVERE
 Blackened Brass, Sienna
 9¾" W x 20¼" H
 3-3.5w Cand. LED




1437 DZ-LV (SHOWN)
1437 RB-LV
 TRELIS
 Aged Zinc,
 Regency Bronze
 11" W x 19¾" H
 4-3.5w Cand. LED



20017 BK-LV (SHOWN)
20017 OZ-LV
 WEYMOUTH
 Black, Oil Rubbed Bronze
 9" W x 20¼" H
 3-3.5w Cand. LED

12V LOW VOLTAGE LUXURY

12V LED BULB SPECIFICATIONS



LED LAMP (INCLUDED)	BULB TYPE	LUMENS	COLOR TEMP.	CRI	WATTS CONSUMED	INCANDESCENT EQUIVALENCY	LIFESPAN
E12LED12V	Cand.	360	2700	80	3.5w	35w	15,000
E26LED12V	Med.	360	2700	80	3.5w	35w	15,000

For complete product details, LED specifications, posts and pier mounts, see hinkley.com. **Note:** Images are for reference purpose only and may not be pictured with the specified LED filament bulb. For more information on bulb specifications, see page 118. Transformer is required, see pages 127-128.

12V PIER MOUNTS



**1857 DZ-LV (SHOWN)
1857 LZ-LV**
ANCHORAGE
Aged Zinc,
Light Oiled Bronze
11" W x 23½" H
3-3.5w Cand. LED



**1167 BK-LV (SHOWN)
1167 AH-LV**
ATWATER
Ash Bronze, Black
9½" W x 21½" H
1-3.5w Med. LED



**2047 GS-LV (SHOWN)
2047 SN-LV**
BINGHAM
Greystone, Sienna
9¾" W x 21¼" H
3-3.5w Cand. LED



2327 OZ-LV
MANHATTAN
Oil Rubbed Bronze
11¼" W x 18¼" H
1-3.5w Med. LED




**11197 BK-LV (SHOWN)
11197 MB-LV**
MONTECITO
Black, Museum Black
11¾" W x 18½" H
3-3.5w Cand. LED



**2917 DZ-LV (SHOWN)
2917 OZ-LV**
SUTCLIFFE
Aged Zinc,
Oil Rubbed Bronze
10¼" W x 18" H
3-3.5w Cand. LED

12V LED BULB SPECIFICATIONS



LED LAMP (INCLUDED)	BULB TYPE	LUMENS	COLOR TEMP.	CRI	WATTS CONSUMED	INCANDESCENT EQUIVALENCY	LIFESPAN
E12LED12V	Cand.	360	2700	80	3.5w	35w	15,000
E26LED12V	Med.	360	2700	80	3.5w	35w	15,000

For complete product details, LED specifications, posts and pier mounts, see hinkley.com. **Note:** Images are for reference purpose only and may not be pictured with the specified LED filament bulb. For more information on bulb specifications, see page 118. Transformer is required, see pages 127-128.

ACCESSORIES + BULBS



6808 BK



6638 BK

DIRECT BURIAL POSTS
(bury 18" below ground level)



6660 OI, 6660 TK,
6660 TR, 6662 TK

For our full offering of post and pier mount accessories, visit Hinkley.com.

ITEM	DIAMETER	HEIGHT	FITTER DIAMETER	WALL THICKNESS	CONSTRUCTION	ACCESSORIES INCLUDED/NOTES
1304 BK	7"	3½"			Aluminum	
1304 BZ	7"	3½"			Aluminum	
1304 HE	7"	3½"			Aluminum	
6638 BK	3"	6½'	3"	.080"	Post, Aluminum	Aluminum Base
6660 TK, OR, OI	3"	7'	3"	.050"	One-Piece Post, Aluminum	
6662 TK	3"	7'	3"	.050"	One-Piece Post, Aluminum	Photo Cell
6808 BK	10½"	8'	3"	.125"	Post, Aluminum	Decorative Flange Bolt Cover

LV MEDIUM BASE	E26LED12V	
	WATTAGE	3.5w
	VOLT AMPS	4.6VA
	LUMENS	360
	COLOR TEMP.	2700K
	CRI	80
	HALOGEN EQUIV.	1 x 35w
	LIFESPAN	15,000 hrs
	BASE	E26
	DIMMABLE	Yes - MLV On Transformer Primary

LV CANDELABRA BASE	E12LED12V	
	WATTAGE	3.5w
	VOLT AMPS	4.7VA
	LUMENS	360
	COLOR TEMP.	2700K
	CRI	80
	HALOGEN EQUIV.	1 x 35w
	LIFESPAN	15,000 hrs
	BASE	E12
	DIMMABLE	Yes - MLV On Transformer Primary

ESTATE SERIES 12V HANGING



2567 MB-LV (SHOWN)
2567 OZ-LV
 ALFORD PLACE
 Museum Black,
 Oil Rubbed Bronze
 17" W x 24½" H
 4-3.5w Cand. LED



2569 OZ-LV (SHOWN)
2569 MB-LV
 ALFORD PLACE
 Museum Black,
 Oil Rubbed Bronze
 40" W x 18¾" H
 6-3.5w Cand. LED



2682 DZ-LV (SHOWN)
2682 BK-LV
 LAKEHOUSE
 Aged Zinc, Black
 9" DIA. x 17¾" H
 1-3.5w Med. LED



2689 BK-LV (SHOWN)
2689 DZ-LV
 LAKEHOUSE
 Aged Zinc, Black
 42" DIA. x 32" H
 6-3.5w Med. LED




2572 AR-LV (SHOWN)
 HARBOR
 Anchor Bronze
 11" W x 19" H
 1-3.5w Cand. LED



1002 OZ-LV (SHOWN)
1002 BK-LV, 1002 SI-LV
 REPUBLIC
 Black, Oil Rubbed
 Bronze, Satin Nickel
 7" W x 16¾" H
 1-3.5w Cand. LED



12V LED BULB SPECIFICATIONS

	LED LAMP (INCLUDED)	BULB TYPE	LUMENS	COLOR TEMP.	CRI	WATTS CONSUMED	INCANDESCENT EQUIVALENCY	LIFESPAN
	E12LED12V	Cand.	360	2700	80	3.5w	35w	15,000
E26LED12V	Med.	360	2700	80	3.5w	35w	15,000	

For complete product details, LED specifications, posts and pier mounts, see hinkley.com. **Note:** Images are for reference purpose only and may not be pictured with the specified LED filament bulb. For more information on bulb specifications, see page 118. Transformer is required, see pages 127-128.

12V HANGING



1162 AH-LV (SHOWN)
1162 BK-LV
 ATWATER
 Ash Bronze, Black
 9½" W x 21½" H
 1-3.5w Cand. LED



29703 VI-LV
 CARSON
 Vintage Iron
 18½" DIA. x 18¾" H
 3-3.5w Cand. LED



29705 VI-LV
 CARSON
 Vintage Iron
 26½" DIA. x 26¼" H
 5-3.5w Cand. LED



29504 BGR-LV
 REID
 Brushed Graphite
 20" DIA. x 21" H
 4-3.5w Cand. LED



29505 BGR-LV
 REID
 Brushed Graphite
 28¼" DIA. x 23" H
 6-3.5w Cand. LED



29304 BGR-LV (SHOWN)
29304 WB-LV
 RHODES
 Brushed Graphite,
 Warm Bronze
 18¼" W x 28¼" H
 4-3.5w Cand. LED



29206 DZ-LV (SHOWN)
29206 SQ-LV
 SAWYER
 Aged Zinc, Sequoia
 24" DIA. x 23¼" H
 6-3.5w Cand. LED




29208 DZ-LV
29208 SQ-LV (SHOWN)
 SAWYER
 Aged Zinc, Sequoia
 30" DIA. x 27¾" H
 9-3.5w Cand. LED



12V LOW VOLTAGE LUXURY

12V LED BULB SPECIFICATIONS



LED LAMP (INCLUDED)	BULB TYPE	LUMENS	COLOR TEMP.	CRI	WATTS CONSUMED	INCANDESCENT EQUIVALENCY	LIFESPAN
E12LED12V	Cand.	360	2700	80	3.5w	35w	15,000
E26LED12V	Med.	360	2700	80	3.5w	35w	15,000

For complete product details, LED specifications, posts and pier mounts, see hinkley.com. **Note:** Images are for reference purpose only and may not be pictured with the specified LED filament bulb. For more information on bulb specifications, see page 118. Transformer is required, see pages 127-128.



SPOT LIGHT 1536 BZ
REX PATH LIGHT 1534 TK
NOUVELLE 2775 BLB



ACCESSORIES

ENHANCE YOUR EXPERIENCE

Maximize curb appeal with ease. Hinkley Landscape Lighting accessories will help you achieve the outdoor lighting design you want with the functionality you need. From the essentials like transformers and ground spikes to the optional elements that take your experience to another level, Hinkley has the accessories that bring your landscape lighting ideas to life.

HINKLEY HOME AUTOMATION APP





SMART LANDSCAPE LIGHTING CONTROL



Control your landscape lights **anytime from anywhere**. Simple setup, easy customization, and effortless landscape lighting automation at your fingertips.

Upgrade your home automation system to include smart landscape lighting with the Hinkley Smart WiFi Landscape Lighting Controller paired with the Hinkley Home Automation app. With this system, it's easy to create customized outdoor lighting patterns that can be controlled at anytime from anywhere with smart devices.

Within the app, you can:

-  Easily set lighting zones that can be controlled separately or together
-  Turn dimmers on and off
-  Adjust brightness on a slidable scale
-  Set programs, schedules, and timers

Whether you are home or away, you can control your home's landscape lighting at the touch of a button. Increase curb appeal and the safety of your property by maintaining consistent outdoor lighting no matter where you are.

CREATE A DYNAMIC AMBIANCE

As dusk settles over your property, the ambiance changes with the sun. You may want a dimmer landscape if you're gathering around a campfire glow, or you may want to brighten things up to provide a safe exit for guests as the night comes to an end!



FLARE WELL LIGHT 15712 SS
SPRINGFIELD 16019 BK-LL

TO DOWNLOAD THE HINKLEY APP, FOLLOW THESE EASY STEPS AND GET CONNECTED IN MINUTES:



HINKLEY

1. Download the Hinkley App from the App Store or Google Play
2. Create an account and register your Hinkley devices
3. Set controls, preferences & schedules

SMART LANDSCAPE

WIRELESS CONTROL + DIMMER

The Hinkley smart landscape controller easily fits into any Hinkley Pro Series Transformer and remains fully enclosed and protected against the elements. Create customized lighting patterns by controlling different zones on your property.



0150 WLC

EASY TO INSTALL

The wireless landscape controller plugs into any Hinkley Pro Series Transformer and includes four 10AWG independent taps.

FEATURES + BENEFITS

- Low voltage 150W controller, powered by transformer output tap.
- Mounts to side through conduit hole in transformer.
- Connector harness adds two pairs of 10AWG independent taps.
- Two independent 75W dimmer zones for a total of 150W.
- Flicker-free dimming including low levels.
- Bluetooth pairing to smart device, controlled by WiFi.
- App reports watts per zone.
- 300W or larger transformer can use multiple controllers.




HINKLEY

PAIR WITH HINKLEY APP


Download on **APP STORE** or **GOOGLE PLAY**



SCAN FOR ADDITIONAL DETAILS
ON THE LANDSCAPE CONTROL

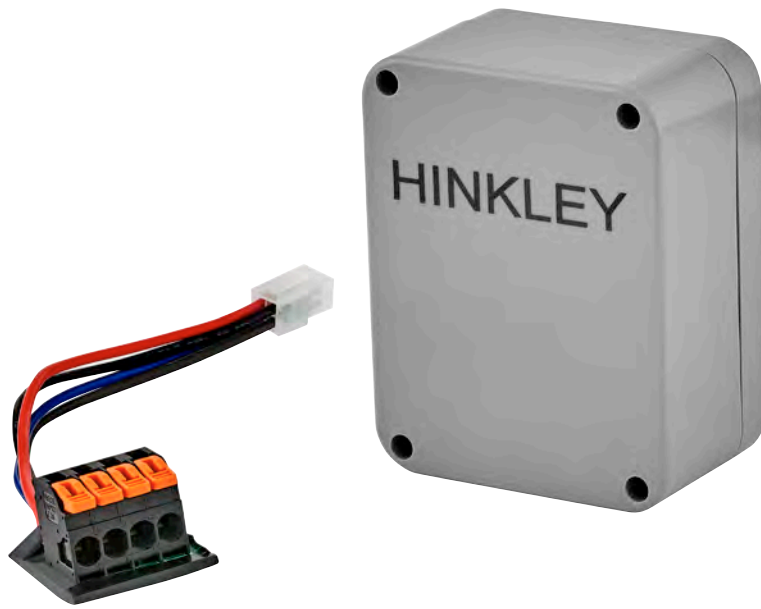

0150 WLC
 SMART LANDSCAPE WIRELESS
 CONTROL + DIMMER

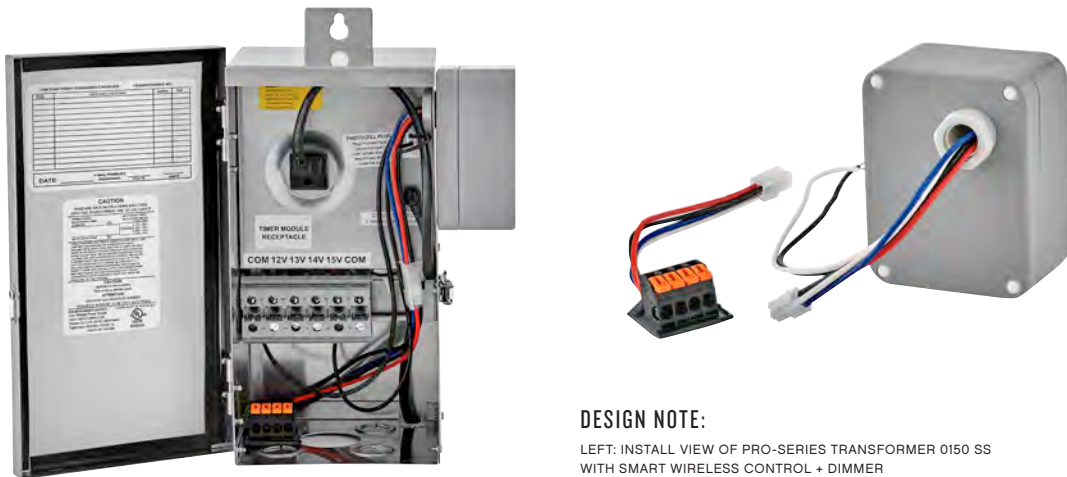

DESIGN NOTE:

LEFT: INSTALL VIEW OF PRO-SERIES TRANSFORMER 0150 SS WITH SMART WIRELESS CONTROL + DIMMER
 ABOVE: SMART WIRELESS CONTROL + DIMMER, 0150 WLC

ITEM	CONSTRUCTION	FINISH	WIDTH	HEIGHT	DEPTH	WATTAGE (VA)	TAP
0150 WLC	Composite	Light Gray	3½"	4½"	2¼"	150w (2x75w)	12v-15v

For additional information on how to select the proper transformer, see page 13-16.

STANDARD TRANSFORMER

For additional information on how to select the proper transformer, view the **DESIGN + INSTALLATION GUIDES** on pages 13-16.



0150 BK
150W STANDARD TRANSFORMER

PRO-SERIES™ TRANSFORMERS



0075W SS
75W PRO-SERIES™
TRANSFORMER



0150 SS
150W PRO-SERIES™
TRANSFORMER



0300 SS
300W PRO-SERIES™
TRANSFORMER



0600 SS
600W PRO-SERIES™
TRANSFORMER



0900 SS
900W PRO-SERIES™
TRANSFORMER

TRANSFORMER CONTROLLERS



0150 WLC
SMART LANDSCAPE WIRELESS
CONTROL + DIMMER



1505 TC
STANDARD
TIME CLOCK



0200 LT
DIGITAL ASTRONOMICAL
TIME CLOCK









1503 PH
DIRECT MOUNT
PHOTOCELL



1510 PH
PHOTOCELL WITH
10' LEAD WIRE


ITEM	NAME	CONSTRUCTION	FINISH	WIDTH	HEIGHT	DEPTH	WATTAGE (VA)	TAP
0150 BK	150w Standard Transformer	Composite Resin	Black	4¼"	6¼"	3¾"	150w	12v
0200 LT	Digital Astronomical Time Clock		Black	3⅞"	3¼"	2⅞"		
1503 PH	Direct Mount Photocell		Black					
1510 PH	Photocell with 10' Lead Wire		Black					
0075W SS	75w Pro-Series Transformer	Stainless Steel		6½"	13¼"	5½"	75w	12v+15v only
0150 SS	150w Pro-Series Transformer	Stainless Steel		6½"	13¼"	5½"	150w	12v+15v only
0300 SS	300w Pro-Series Transformer	Stainless Steel		6½"	18"	6"	300w	12v-15v
0600 SS	600w Pro-Series Transformer	Stainless Steel		6½"	18"	6"	600w	12v-15v
0900 SS	900w Pro-Series Transformer	Stainless Steel		8½"	18"	7"	900w	12v-15v
1505 TC	Standard Time Clock		Black	2¾"	3⅞"	2¼"		
0150 WLC	Smart Landscape Wireless Control + Dimmer	Composite	Light Gray	3½"	4½"	2¼"	150w (2x75w)	12v-15v

TRANSFORMER FEATURE GUIDE	STANDARD TRANSFORMER	PRO-SERIES™ TRANSFORMERS				
						
STYLE	COMPOSITE RESIN	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
MODEL	0150 BK	0075W SS	0150 SS	0300 SS	0600 SS	0900 SS
WATTAGE	150	75	150	300	600	900
BLACK COMPOSITE RESIN	✓					
STAINLESS STEEL		✓	✓	✓	✓	✓
12V-15V MULTI-TAP	12v only	12v + 15v only	12v + 15v only	✓	✓	✓
AUTOMATIC TIMER (4H, 6H, 8H)	✓					
MODULAR TIMER AVAILABLE		✓	✓	✓	✓	✓
PHOTOCELL	✓					
MODULAR PHOTOCELL AVAILABLE		✓	✓	✓	✓	✓
ACCEPTS 0150 WLC SMART CONTROL		✓	✓	✓	✓	✓
AUTO ON/OFF SWITCH	✓					
3' LINE CORD	✓	✓	✓	✓	✓	✓
BOTTOM PLATE		✓	✓	✓	✓	✓
THERMAL CUT-OFF PRIMARY SIDE	✓	✓	✓	✓	✓	✓
THERMAL RESET SECONDARY	✓					
MAGNETIC RESET SECONDARY		✓	✓	✓	✓	✓
STANDARD TERMINAL BLOCK	✓					
HIGH CAPACITY TERMINAL BLOCK		✓	✓	✓	✓	✓
10-YEAR WARRANTY	✓					
LIFETIME WARRANTY		✓	✓	✓	✓	✓




ITEM	NAME	FINISH	CONSTRUCTION
0005 BK	Coupler	Black	Aluminum
0006-TBK	6" Path Light Stem	Black	Aluminum
0012-TBK	12" Path Light Stem	Black	Aluminum
0015 BZ	Surface Mount	Bronze	Aluminum
0018-TBK	18" Path Light Stem	Black	Aluminum
0021 BZ	Tree Mount	Bronze	Aluminum
0022 BZ	Junction Box Cover	Bronze	Aluminum
0024-TBK	24" Path Light Stem	Black	Aluminum
0100 FT	100' Wire (12 AWG)	Black	Stranded 2-Wire
0250 FT	250' Wire (12 AWG)	Black	Stranded 2-Wire
1507 QC	Quick Connect	Black	Composite
16807 MZ	Cast Brass Surface Mount	Matte Bronze	Brass
16910 MZ	10" Stem Mount	Matte Bronze	Brass
16918 MZ	18" Stem Mount	Matte Bronze	Brass
16990 MZ	24" 90° Mount Stem	Matte Bronze	Brass
50200 WN	Wire Connectors (20 pack)		Silicone


PERFORMANCE LENSES



0016 PF
PRISMATIC FILTER LENS
2" DIA. x 1/8" D
Diffuses lamp
beam spread



0016 HL
HEX LOUVER LENS
2" DIA. x 1/8" D
Reduces overall glare



0037 HL
HEX LOUVER LENS
3" DIA. x 1/8" D
Reduces overall glare

0016 LENSES

are used with the following
spot lights: 1535, 1536 series, 1583 NC

0037 HEX LOUVER LENS

is used with 54000,15702, 15705, 15708

Lenses come in packages of 6.

GROUND SPIKES



16814 BZ
HEAVY DUTY
GROUND SPIKE
2 3/4" DIA. x 16" H



16814 MZ
HEAVY DUTY
GROUND SPIKE
2 3/4" DIA. x 16" H



0019 BZ
GROUND SPIKE
2" W x 15" H



0013-JBBZ
GROUND SPIKE
2" W x 9" H







0014 BZ
GROUND SPIKE
2 3/4" W x 9" H



ITEM	NAME	FINISH	CONSTRUCTION
0013-JBBZ	Ground Spike with Junction Box	Bronze	Aluminum
0014 BZ	Ground Spike	Bronze	Composite
0016 HL	Hex Louver Lens (6 pack)		Aluminum
0016 PF	Prismatic Filter Lens (6 pack)		Glass
0019 BZ	Ground Spike	Bronze	Composite
0037 HL	Hex Louver Lens (6 pack)		Aluminum
16814 BZ	Heavy Duty Ground Spike	Bronze	Aluminum/Composite
16814 MZ	Heavy Duty Ground Spike	Matte Bronze	Brass/Composite



LED PAR36 BULBS



FOR USE IN THE 1598 BK, 1598 MZ-FT, AND 1598 MZ-RG WELL LIGHTS



13W27K24-PAR36	MR16 LED	PHOTOMETRICS
	WATTAGE	13w
	BEAM SPREAD	24°
	COLOR TEMP.	2700K
	LUMENS	800
	CANDLE POWER	1200
	BASE	ARI11
	LIFESPAN	25,000 hrs
	 <p>beam spread diameter in feet</p>	



6W27K24-PAR36	MR16 LED	PHOTOMETRICS
	WATTAGE	6w
	BEAM SPREAD	24°
	COLOR TEMP.	2700K
	LUMENS	400
	CANDLE POWER	600
	BASE	ARI11
	LIFESPAN	25,000 hrs
	 <p>beam spread diameter in feet</p>	



13W27K60-PAR36	MR16 LED	PHOTOMETRICS
	WATTAGE	13w
	BEAM SPREAD	60°
	COLOR TEMP.	2700K
	LUMENS	800
	CANDLE POWER	934
	BASE	ARI11
	LIFESPAN	25,000 hrs
	 <p>beam spread diameter in feet</p>	

6W27K60-PAR36	MR16 LED	PHOTOMETRICS
	WATTAGE	6w
	BEAM SPREAD	60°
	COLOR TEMP.	2700K
	LUMENS	400
	CANDLE POWER	467
	BASE	ARI11
	LIFESPAN	25,000 hrs
	 <p>beam spread diameter in feet</p>	

13W30K24-PAR36	MR16 LED	PHOTOMETRICS
	WATTAGE	13w
	BEAM SPREAD	24°
	COLOR TEMP.	3000K
	LUMENS	810
	CANDLE POWER	1205
	BASE	ARI11
	LIFESPAN	25,000 hrs
	 <p>beam spread diameter in feet</p>	

6W30K24-PAR36	MR16 LED	PHOTOMETRICS
	WATTAGE	6w
	BEAM SPREAD	24°
	COLOR TEMP.	3000K
	LUMENS	405
	CANDLE POWER	607
	BASE	ARI11
	LIFESPAN	25,000 hrs
	 <p>beam spread diameter in feet</p>	

13W30K60-PAR36	MR16 LED	PHOTOMETRICS
	WATTAGE	13w
	BEAM SPREAD	60°
	COLOR TEMP.	3000K
	LUMENS	810
	CANDLE POWER	938
	BASE	ARI11
	LIFESPAN	25,000 hrs
	 <p>beam spread diameter in feet</p>	


6W30K60-PAR36	MR16 LED	PHOTOMETRICS
	WATTAGE	6w
	BEAM SPREAD	60°
	COLOR TEMP.	3000K
	LUMENS	405
	CANDLE POWER	469
	BASE	ARI11
	LIFESPAN	25,000 hrs
	 <p>beam spread diameter in feet</p>	

**DESIGN
NOTE**

One side is cut away for angling beam direction





LED PAR36 available, see page 131.

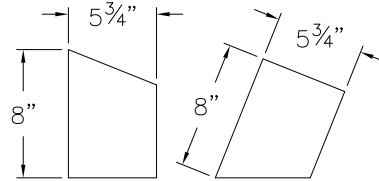

1598 BK
REVERSIBLE PAR36 WELL LIGHT
5 3/4" DIA. x 8" H

**TILT ADJUSTABLE
+/- 20°**



1598 MZ-FT
HARDY ISLAND™
FLAT TOP PAR36 WELL LIGHT
5 3/4" DIA. x 8" H





1598 MZ-RG
HARDY ISLAND™
ROCK GUARD PAR36 WELL LIGHT
6 1/4" DIA. x 9" H







ITEM	MAX LED WATTAGE	FINISH	CONSTRUCTION	LENS
1598 BK	PAR36 13w LED (max)	Black	PVC and Stainless Steel	
1598 MZ-FT	PAR36 13w LED (max)	Matte Bronze	PVC and Brass	Clear
1598 MZ-RG	PAR36 13w LED (max)	Matte Bronze	PVC and Brass	Clear



A wiring kit is supplied. For accessories, see pages 129-130. For transformers, see pages 127-128. LED PAR36 sold separately, see page 131 for more details.



LED BULBS



4W27K15	MR16 LED		PHOTOMETRICS
	WATTAGE	4w	 <p>15°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	15°	
	COLOR TEMP.	2700K	
	LUMENS	240	
	CANDLE POWER	736	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	



4W27K45	MR16 LED		PHOTOMETRICS
	WATTAGE	4w	 <p>45°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	45°	
	COLOR TEMP.	2700K	
	LUMENS	240	
	CANDLE POWER	430	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	



4W27K60	MR16 LED		PHOTOMETRICS
	WATTAGE	4w	 <p>60°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	60°	
	COLOR TEMP.	2700K	
	LUMENS	240	
	CANDLE POWER	280	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	



4W3K15	MR16 LED		PHOTOMETRICS
	WATTAGE	2w	 <p>15°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	15°	
	COLOR TEMP.	3000K	
	LUMENS	250	
	CANDLE POWER	767	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	



4W3K45	MR16 LED		PHOTOMETRICS
	WATTAGE	4w	 <p>45°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	45°	
	COLOR TEMP.	3000K	
	LUMENS	250	
	CANDLE POWER	448	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	

4W3K60	MR16 LED		PHOTOMETRICS
	WATTAGE	4w	 <p>60°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	60°	
	COLOR TEMP.	3000K	
	LUMENS	250	
	CANDLE POWER	292	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	



6W27K15	MR16 LED		PHOTOMETRICS
	WATTAGE	6w	 <p>15°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	15°	
	COLOR TEMP.	2700K	
	LUMENS	450	
	CANDLE POWER	1172	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	



6W27K45	MR16 LED		PHOTOMETRICS
	WATTAGE	56w	 <p>45°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	45°	
	COLOR TEMP.	2700K	
	LUMENS	450	
	CANDLE POWER	694	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	



6W3K15	MR16 LED		PHOTOMETRICS
	WATTAGE	6w	 <p>15°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	15°	
	COLOR TEMP.	3000K	
	LUMENS	460	
	CANDLE POWER	1198	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	


6W3K45	MR16 LED		PHOTOMETRICS
	WATTAGE	6w	 <p>45°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	45°	
	COLOR TEMP.	3000K	
	LUMENS	460	
	CANDLE POWER	709	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	


LED BULBS


MR827K	MR8 LED		PHOTOMETRICS
	WATTAGE	2.5w	 <p>80°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	80°	
	COLOR TEMP.	2700K	
	LUMENS	92	
	CANDLE POWER	46	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	


MR1127K	MR11 LED		PHOTOMETRICS
	WATTAGE	4w	 <p>60°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	60°	
	COLOR TEMP.	2700K	
	LUMENS	350	
	CANDLE POWER	385	
	BASE	Bi-Pin	
	LIFESPAN	50,000 hrs	

4WMR16LED			PHOTOMETRICS
	WATTAGE	4w / 4VA	 <p>60°</p> <p>beam spread diameter in feet</p>
	BEAM SPREAD	60°	
	COLOR TEMP.	2700K	
	LUMENS	360	
	CANDLE POWER	385	
	BASE	GY5.3	
	LIFESPAN	15,000 hrs	

T3 LED REPLACEMENT	00T3-27LED	00T3-LED
	WATTAGE	1.5w / 1.8VA
	BEAM SPREAD	360°
	COLOR TEMP.	2700K
	LUMENS	140
	BASE	Bi-Pin
	LIFESPAN	35,000 hrs
		35,000 hrs


T5 LED REPLACEMENT	00T5-27LED	00T5-LED
	WATTAGE	1.7w / 2.0VA
	BEAM SPREAD	360°
	COLOR TEMP.	2700K
	LUMENS	180
	BASE	Wedge
	LIFESPAN	35,000 hrs
		35,000 hrs


T3 LED REPLACEMENT	00T3-27LED-1.5	
	WATTAGE	1.5w / 1.8VA
	BEAM SPREAD	360°
	COLOR TEMP.	2700K
	LUMENS	150
	BASE	G4
	LIFESPAN	25,000 hrs
		25,000 hrs

T5 LED REPLACEMENT	00T5-27LED-1.5	00T5-27LED-2.5	
	WATTAGE	1.5w / 1.8VA	2.5w / 4.6VA
	BEAM SPREAD	360°	360°
	COLOR TEMP.	2700K	2700K
	LUMENS	150	250
	BASE	G4	G4
	LIFESPAN	25,000 hrs	25,000 hrs
		25,000 hrs	25,000 hrs


LOW VOLTAGE LUXURY BULBS

To see all of Hinkley's LV Luxury Lighting, see pages 112-120.

LV MEDIUM BASE		E26LED12V
	WATTAGE	3.5w
	VOLT AMPS	4.6VA
	LUMENS	360
	COLOR TEMP.	2700K
	CRI	80
	HALOGEN EQUIV.	1 x 35w
	LIFESPAN	15,000 hrs
	BASE	E26
	DIMMABLE	Yes - MLV On Transformer Primary


LV CANDELABRA BASE		E12LED12V
	WATTAGE	3.5w
	VOLT AMPS	4.7VA
	LUMENS	360
	COLOR TEMP.	2700K
	CRI	80
	HALOGEN EQUIV.	1 x 35w
	LIFESPAN	15,000 hrs
	BASE	E12
	DIMMABLE	Yes - MLV On Transformer Primary


LUMACORE™ ENGINES

00G3SE120V-50B		
	WATTAGE	8w
	LUMENS	550
	COLOR TEMP.	3000K
	CRI	80
	HALOGEN EQUIV.	1 x 50w
	LIFESPAN	60,000 hrs
	BASE	Connector


VARIABLE OUTPUT LUMACORE™ ENGINES


To see more information on the 12V Variable Output LumaCORE System, see pages 55-64.

27G4SE-12W					
	WATTAGE	3w / 3.2VA	5w / 5.3VA	8w / 7.8VA	12w / 12.4VA
	LUMENS	260	350	475	750
	COLOR TEMP.	2700K			
	CRI	80			
	HALOGEN EQUIV.	1 x 25w	1 x 35w	1 x 45w	1 x 60w
	LIFESPAN	40,000 hrs			
	BASE	GY5.3			

30G4SE-12W					
	WATTAGE	3w / 3.2VA	5w / 5.3VA	8w / 7.8VA	12w / 12.4VA
	LUMENS	260	350	475	750
	COLOR TEMP.	3000K			
	CRI	80			
	HALOGEN EQUIV.	1 x 25w	1 x 35w	1 x 45w	1 x 60w
	LIFESPAN	40,000 hrs			
	BASE	GY5.3			

To see more information on the 120V Variable Output LumaCORE System, see pages 141-142.

27G4SE-120V					
	WATTAGE	3w	5w	8w	12w
	LUMENS	260	350	475	750
	COLOR TEMP.	2700K			
	CRI	80			
	HALOGEN EQUIV.	1 x 25w	1 x 35w	1 x 45w	1 x 60w
	LIFESPAN	40,000 hrs			
	BASE	GU10			

30G4SE-120V					
	WATTAGE	3w	5w	8w	12w
	LUMENS	260	350	475	750
	COLOR TEMP.	3000K			
	CRI	80			
	HALOGEN EQUIV.	1 x 25w	1 x 35w	1 x 45w	1 x 60w
	LIFESPAN	40,000 hrs			
	BASE	GU10			



TAPER BOLLARD 15288 BK



120V LIGHTING

MORE POWER, MORE LIGHT OUTPUT

Built to last with durable construction and a fade, chip, and crack resistance powder coating, Hinkley 120V Lighting provides superior quality, durability, and light output. Ideal for professional, commercial, and large-scale residential applications, these lights provide style and function throughout your entire property.

HINKLEY'S LINE VOLTAGE PRODUCTS OFFER THE LIGHTING
PROFESSIONAL A MORE POWERFUL LANDSCAPE LIGHTING OPTION

120V 120 VOLT

Line voltage systems operate with more power than their low voltage counterparts and can accommodate larger lamps with much higher wattage, creating significant light output from a small number of fixtures. Line voltage is most commonly used in commercial, security and public applications. It can also be used in residential applications where extensive up-lighting on large architectural features and mature landscape is required or where a 120v wiring system is already in place.

LINE VOLTAGE INSTALLATION

A licensed electrical contractor is required to install Line Voltage landscape lighting systems. When installing 120v systems, the wire must be properly buried at least 18 inches in the ground, placed in a protective conduit and have sealed junction boxes at the connection points. Installation is labor intensive and rigid, which makes line voltage systems a more permanent option than low voltage systems. Installation by a professional will ensure the Line Voltage system functions properly. Local code requirements should be consulted.

QUALITY AND DURABILITY

Hinkley's Line Voltage products are built to last. Constructed of durable aluminum or thermoplastic composite resin, our lighting fixtures are engineered to withstand the elements. We use ultraviolet and corrosive-resistant finishes to ensure maximum lifespan. Every fixture is examined and inspected as part of our exceptional quality control system.

VALUE AND CONVENIENCE

Choosing to install a Line Voltage system can be an economical solution in residential situations where a wiring system is already in place. Rather than re-wire a low voltage system, which requires a transformer and a fresh wiring plan, Hinkley Line Voltage fixtures can be put into place with relative ease. A wide variety of lamping options offers convenience when choosing a Line Voltage system. Traditional incandescent lamps can be used and technology advancements have even led to popularity with self-ballasted fluorescent lamps.

HARDY ISLAND WELL LIGHT
55702 MZ-LMA27K




INSIDE THE VARIABLE OUTPUT 120V LumaCORE™ SPOT LIGHT

With **4 output levels** and **3 lenses included**, you can easily mix and match settings to **create 12 combinations of light to fit any application**. The setting combination can be adjusted at any time, allowing you to switch up your landscape lighting as the foliage and your taste changes.

Available in two color temperatures: **2700K (warm white)** or **3000K (white)**.

The rotational output switch (**A**) shown in the **12 Watt setting** can be adjusted with a small flat-bladed screwdriver. Rotate the switch to the positions shown below to set the desired wattage output.

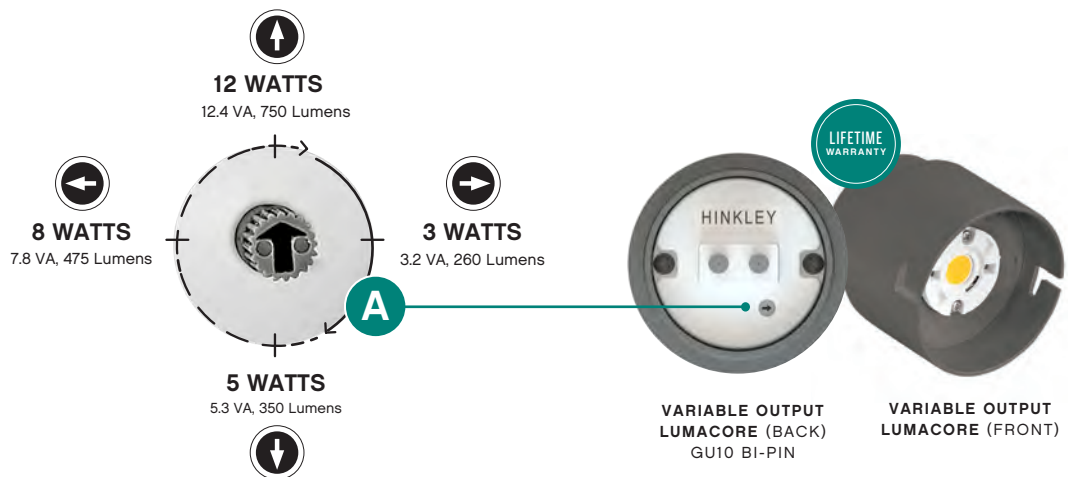

Kelvin Temperature Options: **2700K (Warm White)** or **3000K (White)**

ALL THREE LENS OPTIONS INCLUDED:



20° SPOT

Ideal beam spread for highlighting tall trees, architectural features and flag poles



40° FLOOD

Most common beam spread for up lighting and wall washing




60° WIDE FLOOD

Ideal beam spread for lighting canopies of trees, large structures and wall washing

SEE **PAGE 56** TO EXPLORE THE 12V VARIABLE OUTPUT LumaCORE™


VARIABLE OUTPUT LumaCORE™ 120V SPOT + WELL LIGHTS

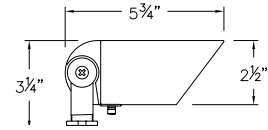

5536 BZ-LMA27K
5536 BZ-LMA30K
SPOT LIGHT
2 1/2" DIA. SHROUD
5 3/4" W x 3 1/4" H



5536 SK-LMA27K
5536 SK-LMA30K
SPOT LIGHT
2 1/2" DIA. SHROUD
5 3/4" W x 3 1/4" H

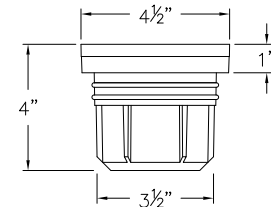

55702 BZ-LMA27K
55702 BZ-LMA30K
FLAT TOP WELL LIGHT
4 1/2" DIA. x 4" H x 1" H TOP
3 1/2" DIA. BASE





55702 MZ-LMA27K
55702 MZ-LMA30K
FLAT TOP WELL LIGHT
4 1/2" DIA. x 4" H x 1" H TOP
3 1/2" DIA. BASE



LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	VOLT AMPS	LUMENS	COLOR TEMP.	FINISH	CONSTRUCTION	LENS
5536 BZ-LMA27K*	27G4SE-120V	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Bronze	Aluminum	Clear
5536 BZ-LMA30K*	30G4SE-120V	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Bronze	Aluminum	Clear
5536 SK-LMA27K*	27G4SE-120V	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Satin Black	Aluminum	Clear
5536 SK-LMA30K*	30G4SE-120V	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Satin Black	Aluminum	Clear
55702 BZ-LMA27K**	27G4SE-120V	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Bronze	Aluminum	Clear
55702 BZ-LMA30K**	30G4SE-120V	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Bronze	Aluminum	Clear
55702 MZ-LMA27K**	27G4SE-120V	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	2700K	Satin Black	Aluminum	Clear
55702 MZ-LMA30K**	30G4SE-120V	3, 5, 8, 12w	3.2, 5.3, 7.8, 12.4VA	260, 350, 475, 750	3000K	Satin Black	Aluminum	Clear



*A wiring kit and ground spike (0014 BZ, page 158) are supplied.**A wiring kit is supplied. 40,000 hour lifespan. For accessories, see page 158. For LumaCORE™ photometrics, see page 64. For warranty details, see Hinkley.com.

120V SPOT LIGHTS

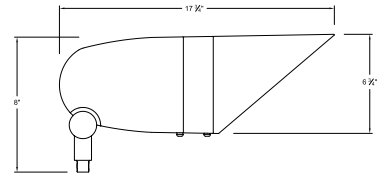

55000 BZ
 LG. SPOT LIGHT
 (Shown with lens)
 6¾" DIA. SHROUD x 8" H
 9¼" W WITHOUT SHROUD


120V

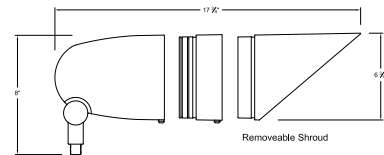

55000 BZ
 LG. SPOT LIGHT
 (Shown with lens and shroud)
 6¾" DIA. SHROUD x 8" H
 17¾" W WITH SHROUD

120V

120V SPOT LIGHTS



54000 BK

SM. SPOT LIGHT

3 3/4" DIA. SHROUD x 6 3/4" H
8 1/2" W SHROUD



54000 BZ

SM. SPOT LIGHT

3 3/4" DIA. SHROUD x 6 3/4" H
8 1/2" W SHROUD



ITEM	54000	55000 BZ
NAME	Small Spot Light	Large Spot Light (Removable Lens and Shroud)
FINISH	Black (BK), Bronze (BZ)	Bronze (BZ)
CONSTRUCTION	Durable Aluminum	Durable Aluminum
LENS	Clear, Convex, Tempered	Clear, Convex, Tempered
VOLTAGE	120v	120v
LED LAMP (NOT INCLUDED)	PAR 16 LED or PAR20 LED (up to 8w; 75w Equiv.)	PAR 38 LED (up to 12w; 175w Equiv.)
WIRING/WIRING COMPARTMENT	6" usable 200°C 18-AWG wire leads and ground leads	6" usable 200°C 18-AWG wire leads and ground leads
SHROUD	Durable aluminum housing with silicone o-rings providing a superior weather-tight seal	Durable aluminum housing with silicone o-rings providing a superior weather-tight seal
SOCKET	E26	E26

Item 54000 and 55000 BZ accept LED PARI6, LED PAR20, or LED E26 lamps. For line voltage accessories, see page 120.




LUMACORE WELL LIGHT
55702 BZ-LMA27K

PAR LAMP WELL LIGHT



Accepts any E26
base Par lamp.




51000 BZ
120V 100W SM.
IN-GROUND WELL LIGHT
9½" DIA. x 12¾" H
6¼" DIA. BASE



ITEM	51000 BZ
FINISH	Bronze (BZ)
CONSTRUCTION	Thermoplastic composite resin with molded ribbing to prevent ground shifting.
LENS	Clear, Flat
VOLTAGE	120v
LED LAMP (NOT INCLUDED)	Up to 8w LED; 100w Equiv.
WIRING/WIRING COMPARTMENT	6" usable 105°C 18-AWG wire leads and ground leads. Isolated sealable wiring compartment. Cover has (2) threaded ¾"-14NPS entries for conduit re-attachment. Encapsulant potting compound included.
GASKET	EPDM 1-piece Molded Silicone U-Channel
REFLECTOR	120° Hydroformed Alzak-Finished Aluminum
SOCKET	E26
LIVE LOAD CAPACITY	2200 lbs.
ACCESSORIES	Small Concrete Kit: 51010 CK Small Rock Guard: 51901 BZ


TERRACE SIGN LIGHTS

Terrace Sign Lights feature a linear head that rotates 360° for precise adjustments for any lighting application inside or out, ensuring any artwork or signage will appear just as vibrant at night as it does during the day. Engineered with cutting-edge SunLike Series natural spectrum LEDs which produce light closely matching that of natural sunlight, the streamlined design and durable aluminum construction complements any architectural style.

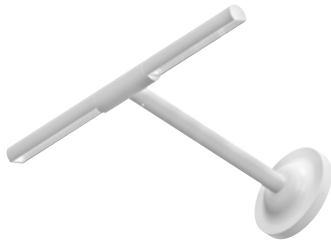


15062 MW
SHORT SIGN LIGHT
16½" W x 7¾" H
12" EXT. (SHOWN)

120V

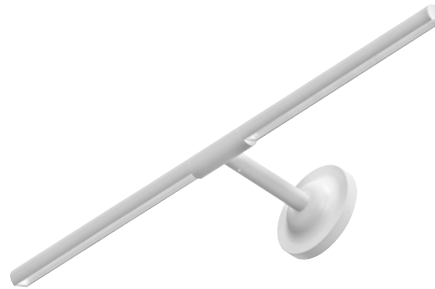

15063 MW
LONG SIGN LIGHT
28¼" W x 5¼" H
6" EXT. (SHOWN)

120V

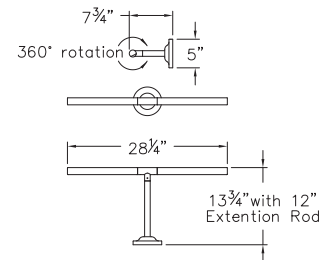


15062 MR
SHORT SIGN LIGHT
16½" W x 7¾" H
6" EXT. (SHOWN)

120V



15063 MR
LONG SIGN LIGHT
28¼" W x 5¼" H
12" EXT. (SHOWN)

120V

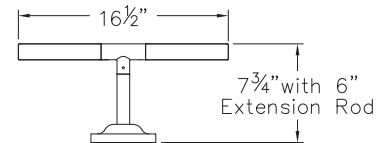

DESIGN NOTE

The unique design of the sleek Terrace sign light can accomplish a wide variety of lighting applications.



SCAN FOR TERRACE
PHOTOMETRIC GUIDE

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION	BACK PLATE	GLASS	EXT. RODS INCLUDED
15062 MR	EAL6.5LEDBZ	26w LED	1200	3000K	Yes	Museum Bronze	Aluminum	5¼" Dia. x 1½" H	Clear	1-6", 1-12"
15062 MW	EAL6.5LEDMW	26w LED	1200	3000K	Yes	Matte White	Aluminum	5¼" Dia. x 1½" H	Clear	1-6", 1-12"
15063 MR	EAL12.5LEDBZ	52w LED	2400	3000K	Yes	Museum Bronze	Aluminum	5¼" Dia. x 1½" H	Clear	1-6", 1-12"
15063 MW	EAL12.5LEDMW	52w LED	2400	3000K	Yes	Matte White	Aluminum	5¼" Dia. x 1½" H	Clear	1-6", 1-12"

60,000 hour lifespan. A wiring kit is supplied. For complete product details and LED specifications, visit Hinkley.com.

MUSHROOM PATH LIGHTS



ITEM	56000
FINISH	Black (BK), Bronze (BZ), Charcoal Gray (CY)
CONSTRUCTION	Durable Aluminum
LENS	Clear Polycarbonate
LED LAMP (NOT INCLUDED)	A19 LED (up to 8w); 75w Equiv.
WIRING	6" usable 105°C 18-AWG wire leads
SOCKET	E26

For line voltage accessories, see page 158.

PHOTOMETRICS

DISTANCE FROM LIGHT	ITEM	1'	2'	3'	4'	5'	6'
FOOT CANDLES (8w LED)	56000	41.67	12.5	4.60	1.39	0.37	0.13



ATLANTIS BOLLARD 55601 BZ

120V BOLLARDS



55601 BZ
ATLANTIS™
ROUND BOLLARD
3" DIA. x 30" H

120V



55601 TT
ATLANTIS™
ROUND BOLLARD
3" DIA. x 30" H

120V



55602 BZ
ATLANTIS™
SQUARE BOLLARD
3" SQ. x 30" H

120V



55602 TT
ATLANTIS™
SQUARE BOLLARD
3" SQ. x 30" H

120V

DESIGN NOTE

All large LED bollards feature the LumaCORE system, which has a **LIFETIME WARRANTY**.

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	LUMENS	COLOR TEMP.	DIMMABLE	LIFESPAN	FINISH	CONSTRUCTION	GLASS
55601 BZ	00G3SE120V-50	8w	550	3000K	No	60,000 hrs	Bronze	Aluminum	Etched
55601 TT	00G3SE120V-50	8w	550	3000K	No	60,000 hrs	Titanium	Aluminum	Etched
55602 BZ	00G3SE120V-50	8w	550	3000K	No	60,000 hrs	Bronze	Aluminum	Etched
55602 TT	00G3SE120V-50	8w	550	3000K	No	60,000 hrs	Titanium	Aluminum	Etched

Photometrics for bollards are available on Hinkley.com. See page 135 for engine details. A wiring kit, 2" diameter, 18" length PVC post and surface mount are supplied. For line voltage accessories, see page 158. For coordinating Atlantis lanterns, see Hinkley.com.

120V BOLLARDS



55607 BK
SHELTER™ BOLLARD
4" W x 30" H x 3" D

120V



15288 BK
TAPER™ BOLLARD
6" SQ. x 36" H

120V



15288 BZ
TAPER™ BOLLARD
6" SQ. x 36" H

120V



15288 TT
TAPER™ BOLLARD
6" SQ. x 36" H

120V


DESIGN NOTE



Taper Bollards include
120V/277V universal driver.

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	LUMENS	COLOR TEMP.	DIMMABLE	LIFESPAN	FINISH	CONSTRUCTION	GLASS
15288 BK	GL-3030	28w	2800	3000K	Yes	40,000 hrs	Black	Aluminum	
15288 BZ	GL-3030	28w	2800	3000K	Yes	40,000 hrs	Bronze	Aluminum	
15288 TT	GL-3030	28w	2800	3000K	Yes	40,000 hrs	Titanium	Aluminum	
55607 BK	00G3SE120V-50	8w	550	3000K	No	60,000 hrs	Black	Aluminum	Clear Acrylic Outside Cylinder Seedy Glass Inside Panel

Photometrics for bollards are available on Hinkley.com. A wiring kit, 2" diameter, 18" length PVC post and surface mount are supplied. For line voltage accessories, see page 158. Taper bollards coordinate with the Taper family from our residential product line, see Hinkley.com

120V LUNA STEP LIGHTS



58504 BZ
120V STEP LIGHT
3" W x 4½" H
 



58504 SW
120V STEP LIGHT
3" W x 4½" H
 




58504 SK
120V STEP LIGHT
3" W x 4½" H
 



58504 TT
120V STEP LIGHT
3" W x 4½" H
 



58504 MZ
120V STEP LIGHT
3" W x 4½" H
  

 LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION
58504 BZ	LS-20	4w	240	2700K	Yes	Bronze	Zinc Aluminum Alloy
58504 MZ	LS-20	4w	240	2700K	Yes	Matte Bronze	Forged Brass Face Plate
58504 SK	LS-20	4w	240	2700K	Yes	Satin Black	Zinc Aluminum Alloy
58504 SW	LS-20	4w	240	2700K	Yes	Satin White	Zinc Aluminum Alloy
58504 TT	LS-20	4w	240	2700K	Yes	Titanium	Zinc Aluminum Alloy

40,000 hour lifespan. A wiring kit is supplied. For line voltage accessories, see page 158.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)


DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'
FOOT CANDLES	8" Mounting	58504 BZ	6.36	1.01	0.22					
	16" Mounting		2.6	1.65	0.67	0.3	0.13			
	30" Mounting		0.16	1.1	0.69	0.4	0.23	0.13		
	8" Mounting	58504 MZ	6.74	1.12	0.24					
	16" Mounting		2.73	1.82	0.73	0.31	0.14			
	30" Mounting			1.22	0.76	0.40	0.23	0.12		
	8" Mounting	58504 SK	6.36	1.01	0.22					
	16" Mounting		2.6	1.65	0.67	0.3	0.13			
	30" Mounting		0.16	1.1	0.69	0.4	0.23	0.13		
	8" Mounting	58504 SW	9.29	2.6	1.17	0.64	0.42	0.29	0.21	0.16
	16" Mounting		3.0	2.32	1.17	0.66	0.41	0.28	0.2	0.15
	30" Mounting		0.25	1.19	0.93	0.6	0.4	0.29	0.21	0.16
	8" Mounting	58504 TT	9.05	2.2	0.83	0.4	0.25	0.16	0.11	
	16" Mounting		3.16	2.17	0.97	0.49	0.27	0.16	0.1	
	30" Mounting		0.1	1.29	0.86	0.52	0.33	0.22	0.15	0.1

120V LIGHTING




LUNA STEP LIGHT
58504 TT

120V LUNA STEP LIGHTS

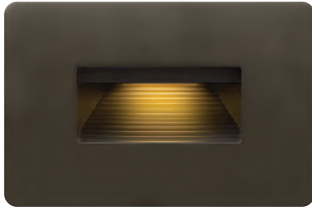

58508 BZ
120V STEP LIGHT
4½" W x 3" H

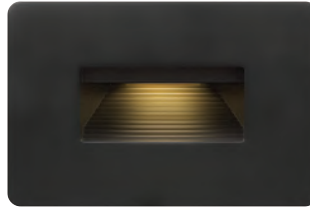

58508 SK
120V STEP LIGHT
4½" W x 3" H




58508 MZ
120V STEP LIGHT
4½" W x 3" H



58508 SW
120V STEP LIGHT
4½" W x 3" H



58508 TT
120V STEP LIGHT
4½" W x 3" H

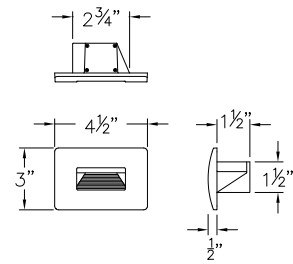

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION
58508 BZ	LS-20	4w	240	2700K	Yes	Bronze	Zinc Aluminum Alloy
58508 MZ	LS-20	4w	240	2700K	Yes	Matte Bronze	Forged Brass Face Plate
58508 SK	LS-20	4w	240	2700K	Yes	Satin Black	Zinc Aluminum Alloy
58508 SW	LS-20	4w	240	2700K	Yes	Satin White	Zinc Aluminum Alloy
58508 TT	LS-20	4w	240	2700K	Yes	Titanium	Zinc Aluminum Alloy

40,000 hour lifespan. A wiring kit is supplied. For line voltage accessories, see page 158.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	
FOOT CANDLES	8" Mounting	58508 BZ	3.58	0.71	0.2						
	16" Mounting			0.86	0.38	0.15					
	30" Mounting				0.27	0.24	0.13				
	8" Mounting	58508 MZ	3.79	0.79	0.23						
	16" Mounting			0.90	0.41	0.17					
	30" Mounting				0.33	0.29	0.14				
	6" Mounting	58508 SK	1.08	0.03	0.01						
	18" Mounting			0.62	0.55	0.08	0.01				
	30" Mounting			0.07	0.26	0.21	0.11	0.03	0.01		
	8" Mounting	58508 SW	7.0	2.19	0.97	0.57	0.37	0.26	0.19	0.14	
	16" Mounting			0.66	0.158	0.85	0.5	0.32	0.23	0.16	0.12
	30" Mounting				0.32	0.52	0.43	0.3	0.23	0.16	0.12
8" Mounting	58508 TT	4.5	1.8	0.45	0.25	0.15	0.11				
16" Mounting				1.03	0.54	0.27	0.15	0.1			
30" Mounting					0.32	0.29	0.19	0.12			

120V LUNA STEP LIGHTS



58506 SK
120V STEP LIGHT
4¾" W x 4½" H
 




58506 BZ
120V STEP LIGHT
4¾" W x 4½" H
 




58506 SW
120V STEP LIGHT
4¾" W x 4½" H
 

DOUBLE GANG
configuration

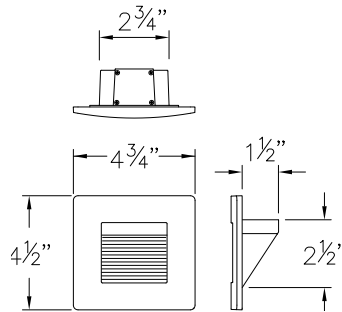

58506 TT
120V STEP LIGHT
4¾" W x 4½" H
 


 LED ITEM	LED ENGINE	MAX WATTAGE	LUMENS	COLOR TEMP.	DIMMABLE	FINISH	CONSTRUCTION
58506 BZ	LS-20	4w	240	2700K	Yes	Bronze	Zinc Aluminum Alloy
58506 SK	LS-20	4w	240	2700K	Yes	Satin Black	Zinc Aluminum Alloy
58506 SW	LS-20	4w	240	2700K	Yes	Satin White	Zinc Aluminum Alloy
58506 TT	LS-20	4w	240	2700K	Yes	Titanium	Zinc Aluminum Alloy

40,000 hour lifespan. A wiring kit is supplied. For line voltage accessories, see page 158.


PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'
FOOT CANDLES	8" Mounting	58506 BZ	4.76	0.47	0.08		
	16" Mounting		2.24	0.92	0.17	0.06	
	30" Mounting		1.08	0.65	0.21	0.11	0.03
	6" Mounting	58506 SK	0.99	0.02	0.01		
	18" Mounting		2.04	0.42	0.06	0.01	
	30" Mounting		0.98	0.64	0.19	0.05	0.01
	8" Mounting	58506 SW	7.15	0.89	0.20	0.08	
	16" Mounting		3.22	0.77	0.31	0.14	0.07
	30" Mounting		2.12	0.81	0.26	0.15	0.06
	8" Mounting	58506 TT	6.86	0.70	0.16	0.06	
	16" Mounting		2.97	1.13	0.39	0.11	0.05
	30" Mounting		1.88	0.95	0.23	0.14	0.06

120V LUNA STEP LIGHTS - 3000K




58508 BZ3K
120V LUNA
STEP LIGHT 3000K
4½" W x 3" H



58508 SK3K
120V LUNA
STEP LIGHT 3000K
4½" W x 3" H



58508 SW3K
120V LUNA
STEP LIGHT 3000K
4½" W x 3" H




58506 BZ3K
120V LUNA STEP LIGHT
3000K DOUBLE GANG
4¾" W x 4½" H



58506 SK3K
120V LUNA STEP LIGHT
3000K DOUBLE GANG
4¾" W x 4½" H



58506 SW3K
120V LUNA STEP LIGHT
3000K DOUBLE GANG
4¾" W x 4½" H

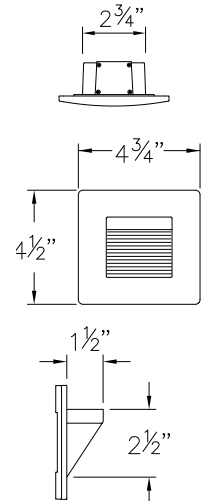

LUNA STEP LIGHT 120V LED HORIZONTAL DOUBLE GANG

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	LUMENS	COLOR TEMP.	HALOGEN EQUIV.	DIMMABLE	FINISH	CONSTRUCTION
58506 BZ3K	LS-20-30	4w	240	3000K	20w	Yes	Bronze	Zinc Aluminum Alloy
58506 SK3K	LS-20-30	4w	240	3000K	20w	Yes	Satin Black	Zinc Aluminum Alloy
58506 SW3K	LS-20-30	4w	240	3000K	20w	Yes	Satin White	Zinc Aluminum Alloy

40,000 hour lifespan. A wiring kit is supplied. For line voltage accessories, see page 158.

LUNA STEP LIGHT 120V LED HORIZONTAL

LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	LUMENS	COLOR TEMP.	HALOGEN EQUIV.	DIMMABLE	FINISH	CONSTRUCTION
58508 BZ3K	LS-20-30	4w	240	3000K	20w	Yes	Bronze	Zinc Aluminum Alloy
58508 SK3K	LS-20-30	4w	240	3000K	20w	Yes	Satin Black	Zinc Aluminum Alloy
58508 SW3K	LS-20-30	4w	240	3000K	20w	Yes	Satin White	Zinc Aluminum Alloy

40,000 hour lifespan. A wiring kit is supplied. For line voltage accessories, see page 158.


120V BRICK + STEP LIGHTS



59024 BZ-LL
120V LED BRICK LIGHT
10" W x 3½" H x 4¼" D




59040 BZ
120V 40W G9 BRICK LIGHT
10" W x 3½" H x 4¼" D

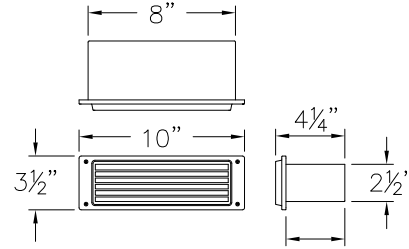

58015 BZ-LL
120V LED STEP LIGHT
7½" W x 4¾" H x 3¼" D



58025 BZ
120V 25W G9 STEP LIGHT
7½" W x 4¾" H x 3¼" D

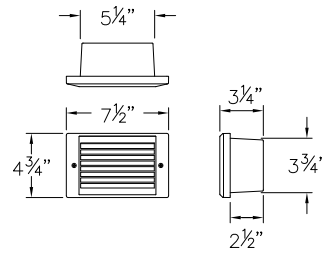

ITEM	59024 BZ-LL	59040 BZ	58015 BZ-LL	58025 BZ
NAME	120v LED Brick Light	Brick Light (40w) G9	120v LED Step Light	Step Light (25w) G9
FINISH	Powder-Coated Bronze (BZ)	Powder-Coated Bronze (BZ)	Powder-Coated Bronze (BZ)	Powder-Coated Bronze (BZ)
CONSTRUCTION	Aluminum with a silicone gasket providing a superior weather-tight seal	Aluminum with a silicone gasket providing a superior weather-tight seal	Aluminum with a silicone gasket providing a superior weather-tight seal	Aluminum with a silicone gasket providing a superior weather-tight seal
LENS	Clear, Flat	Frosted, Flat	Frosted, Flat	Frosted, Flat
VOLTAGE	120v	120v	120v	120v
LAMP/LED ENGINE	4.5w NX3 included	Up to 5w G9 LED (not included) 25w Equiv.	4.5w NX3 included	Up to 5w G9 LED (not included) 40w Equiv.
WIRING/WIRING COMPARTMENT	6" usable 200°C 18-AWG wire leads and ground leads	6" usable 200°C 18-AWG wire leads and ground leads	6" usable 200°C 18-AWG wire leads and ground leads	6" usable 200°C 18-AWG wire leads and ground leads
SOCKET		White Porcelain Bi-Pin Base		White Porcelain Bi-Pin Base

For line voltage accessories, see page 158.

PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		ITEM/LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'
FOOT CANDLES	6" Mounting	59024 BZ-LL	3.32	0.68	0.15	0.03	0.01				
	18" Mounting		0.02	0.52	0.32	0.19	0.09	0.04	0.02	0.01	
	30" Mounting		0.03	0.04	0.19	0.17	0.12	0.06	0.04	0.02	0.01
	6" Mounting	59040 BZ	10.20	3.55	1.58	0.68	0.08				
	12" Mounting		4.25	3.61	3.48	1.79	0.53	0.32	0.25	0.18	0.11
	18" Mounting		1.15	1.06	0.89	0.68	0.64	0.58	0.41	0.25	0.15
	6" Mounting	58015 BZ-LL	10.33	1.73	0.4	0.14	0.05				
	18" Mounting		1.53	2.06	1.02	0.53	0.32	0.17	0.12	0.5	0.03
	30" Mounting		0.13	0.76	0.84	0.61	0.35	0.24	0.15	0.09	0.06
	6" Mounting	58025 BZ	16.37	3.84	0.99	0.33	0.11	0.03	0.20	0.10	
18" Mounting	3.25		2.37	1.82	1.16	0.52	0.30	0.21	0.10		

120V ACCESSORIES



50500 PP
POWER POST
3¼" DIA. x 20½" H



50200 WN
WIRE CONNECTORS
⅝" DIA. x 1¼" H



0022 BZ
JUNCTION BOX COVER
4½" DIA. x ¾" H

ITEM	50200 WN	50500 PP	0022 BZ
NAME	Silicone Wire Connectors	Power Post	Junction Box Cover
DESCRIPTION	Outdoor Wire Connectors	Landscape Splice Post with Junction Box	
WIDTH/DIAMETER	⅝" Dia.	3¼" Dia. 7" W (with fins)	
HEIGHT	1¼"	20½"	
DETAILS	Package of 20	PVC	
FINISH			Bronze (BZ)
CONSTRUCTION	Composite	Composite	Aluminum

INDEX

0005 BK	129	1187 BLB-LV	116	1518 TT-LL	25
0006-TBK	129	1187 SN-LV	116	1521 BZ	79
0012-TBK	129	1304 BK	118	15222 BK	89
0013-JBBZ	130	1304 BZ	118	15222 BZ	89
0014 BZ	130	1304 HE	118	15222 MW	89
0015 BZ	129	1321 BK-LV	115	15223 BK	90
0016 HL	130	1321 KZ-LV	115	15223 BZ	90
0016 PF	130	13W27K24-PAR36	131	15223 MW	90
0018-TBK	129	13W27K60-PAR36	131	15225 BK	90
0019 BZ	130	13W30K24-PAR36	131	15225 BZ	90
0021 BZ	129	13W30K60-PAR36	131	15225 MW	90
0022 BZ	129	1403OC-LL	36	15228 BK	91
0022 BZ	158	1437 DZ-LV	116	15228 BZ	91
0024-TBK	129	1437 RB-LV	116	15228 MW	91
0037 HL	130	15014 BZ-LL	26	15232 BK	89
0075W SS	127	15014 HE-LL	26	15232 BZ	89
00T3-27LED-1.5	134	15014 MZ-LL	26	15232 MW	89
00T3-LED	134	15014 SK-LL	26	15242 SS	71
00T5-27LED-1.5	134	15014 TT-LL	26	15242 SS	107
00T5-LED	134	1502 BZ-LL	37	15252 SS	71
0100 FT	129	1502 CY-LL	37	15252 SS	107
0150 BK	127	1503 PH	127	15288 BK	151
0150 SS	127	15030 OZ-LL	30	15288 BZ	151
0150 WLC	126	15030 TK-LL	30	15288 TT	151
0200 LT	127	1504 BZ	36	1529 CB-LL	35
0250 FT	129	1505 TC	127	1530 BZ	79
0300 SS	127	15062 MR	147	15300 BZ-LL	80
0600 SS	127	15062MW	147	15300 BZ-LMA27K	60
0900 SS	127	15063MR	147	15300 BZ-LMA30K	60
1001 BK-LV	114	15063MW	147	15300 MZ-LL	80
1001 OZ-LV	114	1507 QC	129	15300 MZ-LMA27K	60
1001 SI-LV	114	15074 SS	67	15300 MZ-LMA30K	60
1002 BK-LV	119	15075 SS	67	15300 SK-LL	80
1002 OZ-LV	119	1508 CB-LL	34	15300 SK-LMA27K	60
1002 SI-LV	119	15084 SS	67	15300 SK-LMA30K	60
1004 BK-LV	114	15085 SS	67	1531 BZ	45
1004 OZ-LV	114	1510 PH	127	1531 TK	45
1004 SI-LV	114	15102 MR-LL	33	1533 BZ	45
1007 BK-LV	116	15102 TK-LL	33	1533 TK	45
1007 OZ-LV	116	1511 BZ	85	15334 SS	73
1007 SI-LV	116	1512 BZ	85	15334 SS	109
11197 BK-LV	117	1513 MB-LL	22	15335 SS	74
11197 MB-LV	117	1513 OZ-LL	22	15335 SS	110
1161 AH-LV	115	1516 MR-LL	34	1534 BZ	46
1161 BK-LV	115	1518 BZ-LL	25	1534 TK	46
1162 AH-LV	120	1518 CD-LL	25	15344 SS	73
1162 BK-LV	120	1518 HE-LL	25	15344 SS	109
1167 AH-LV	117	1518 MZ-LL	25	15345 SS	74
1167 BK-LV	117	1518 SK-LL	25	15345 SS	110

INDEX

1535 BZ	76	15501 BZ	50	1566 DZ-LL	33
1535 BZ-LMA27K	59	15501 SK	50	1566 OZ-LL	33
1535 BZ-LMA30K	59	15501 TT	50	1568 RB-LL	34
1536 BZ-LL	75	15502 BZ	48	15702 BZ	81
1536 BZ-LMA27K	59	15502 SK	48	15702 BZ-LMA27K	62
1536 BZ-LMA30K	59	15502 TT	48	15702 BZ-LMA30K	62
1536 BZDN	76	15508 BZ	101	15702 MZ	81
1536 MZ-LL	75	15508 MZ	101	15702 MZ-LMA27K	62
1536 MZ-LMA27K	59	15508 SK	101	15702 MZ-LMA30K	62
1536 MZ-LMA30K	59	15508 SW	101	15705 BZ	81
1536 SK-LL	75	15508 TT	101	15705 BZ-LMA27K	62
1536 SK-LMA27K	59	1551 BZ	99	15705 BZ-LMA30K	62
1536 SK-LMA30K	59	1551 SW	99	15705 MZ	81
1536 TXB-LL	75	1553 BZ	98	15705 MZ-LMA27K	62
1536 TXB-LMA27K	59	1553 SK	98	15705 MZ-LMA30K	62
1536 TXB-LMA30K	59	1553 SW	98	15708 BZ	81
1536BZ	75	1554 SZ-LL	34	15708 BZ-LMA27K	62
1536MZ	75	15540 BK	38	15708 BZ-LMA30K	62
1536SK	75	15540 BZ	38	15708 MZ	81
1536TXB	75	15542 BK	21	15708 MZ-LMA27K	62
1539 BS	79	15542 OZ	21	15708 MZ-LMA30K	62
1540 CB-LL	36	1555 CB-LL	37	15710 SS	69
1542 BZ-LED	102	15556 MZ	95	15712 SS	69
15444 BZ	94	15558 BK-LL	20	15714 BZ	38
15444 BZ-10	94	15558 OZ-LL	20	15740 SS	69
15444 ST	94	1556 BZ	99	15742 SS	69
15444 ST-10	94	1556 SW	99	1579 MT-LL	29
15444 TT	94	1557 BZ	98	1579 SK-LL	29
15444 TT-10	94	1557 SK	98	1579 SS-LL	29
15446 BZ	94	1557 SW	98	1583 NC	79
15446 BZ-10	94	1560 AR-LL	23	1594 BZ-LL	104
15446 ST	94	15601 BZ	51	1594 MZ-LL	104
15446 ST-10	94	15601 SK	51	1598 BK	84
15446 TT	94	15601 TT	51	1598 BK	132
15446 TT-10	94	15602 BZ	49	1598 MZ-FT	84
15448 BZ	92	15602 SK	49	1598 MZ-FT	132
15448 ST	92	15602 TT	49	1598 MZ-RG	84
15448 TT	92	15603 MR	155	1598 MZ-RG	132
1546 BZ-LL	104	15607 BK	52	16004 MZ-LL	41
1546 MZ-LL	104	1561 AR-LL	23	16007 MZ-LL	41
1547 BK-LL	35	1561 SK-LL	23	1601 MB-LV	114
1547 KZ-LL	35	1562 BZ	97	1601 OZ-LV	114
1548 BZ-LL	39	1562 SW	97	16010 MZ-LL	41
1548 SK-LL	39	1563 BZ	97	16012 MZ-LL	42
1548 TT-LL	39	1563 SK	97	16016 BK-LL	43
15492 BK-LL	31	1563 SW	97	16016 MZ-LL	42
15492 OZ-LL	31	1565 BZ	97	16016 OZ-LL	44
1550 BZ	28	1565 SK	97	16019 BK-LL	43
1550 SK	28	1565 SW	97	16019 MZ-LL	42

INDEX

16019 OZ-LL	44	2569 OZ-LV	119	55602 TT	150
16022 BK-LL	43	2572 AR-LV	119	55607 BK	151
16022 MZ-LL	42	2574 AR-LV	114	55702 BZ-LMA27K	142
16022 OZ-LL	44	2576 AR-LV	116	55702 BZ-LMA30K	142
16050 MZ-LL	41	2576 SK-LV	116	55702 MZ-LMA27K	142
16055 MZ-LL	41	2682 BK-LV	119	55702 MZ-LMA30K	142
16501 MZ	78	2682 DZ-LV	119	56000 BK	148
16501 MZ-27K60	78	2684 BK-LV	114	56000 BZ	148
16507 MZ	78	2684 DZ-LV	114	56000 CY	148
16507 MZ-27K60	78	2687 BK-LV	114	58015 BZ-LL	156
16571 MZ-LL	78	2687 DZ-LV	114	58025 BZ	157
16701 MZ	83	2689 BK-LV	119	58504 BZ	152
16704 MZ	83	2689 DZ-LV	119	58504 MZ	152
16707 MZ	83	27G4SE-12W	136	58504 SK	152
1671 BK-LV	114	2801 DZ-LV	114	58504 SW	152
16710 MZ	83	2801 OZ-LV	114	58504 TT	152
1677 BK-LV	114	2917 DZ-LV	117	58506 BZ	156
16801 MZ-LL	102	2917 OZ-LV	117	58506 BZ3K	156
16804 MZ-LL	102	29206 DZ-LV	120	58506 SK	156
16805 MZ-LED	102	29206 SQ-LV	120	58506 SK3K	156
16807 MZ	129	29208 DZ-LV	120	58506 SW	156
16814 BZ	130	29208 SQ-LV	120	58506 SW3K	156
16814 MZ	130	29304 BGR-LV	120	58506 TT	156
16910 MZ	129	29304 WB-LV	120	58508 BZ	156
16918 MZ	129	29504 BGR-LV	120	58508 BZ3K	156
16990 MZ	129	29505 BGR-LV	120	58508 MZ	154
17467 BLC-LV	116	29700 VI-LV	115	58508 SK	154
17467 MB-LV	116	29703 VI-LV	120	58508 SK3K	156
1857 DZ-LV	117	29705 VI-LV	120	58508 SW	154
1857 LZ-LV	117	30G4SE-12W	136	58508 SW3K	156
1861 OZ-LV	115	4W27K15	133	58508 TT	154
1861 TK-LV	115	4W27K45	133	59024 BZ-LL	157
1901 MT-LV	115	4W27K60	133	59040 BZ	157
1901 SS-LV	115	4W3K15	133	6638 BK	118
20017 BK-LV	116	4W3K45	133	6660 OI	118
20017 OZ-LV	116	4W3K60	133	6660 OR	118
2047 GS-LV	117	50200 WN	129	6660 TK	118
2047 SN-LV	117	50500 PP	158	6662 TK	118
2121 CB-LV	115	51000 BZ	146	6808 BK	118
2121 MB-LV	115	54000 BZ	144	6W27K15	133
2227 CB-LV	115	54000BK	144	6W27K24-PAR36	131
2327 OZ-LV	117	55000 BZ	143	6W27K45	133
2361 MB-LV	115	5536 BZ-LMA27K	142	6W27K60-PAR36	131
2361 OZ-LV	115	5536 BZ-LMA30K	142	6W30K24-PAR36	131
2561 MB-LV	114	5536 SK-LMA27K	142	6W30K60-PAR36	131
2561 OZ-LV	114	5536 SK-LMA30K	142	6W3K15	133
2567 MB-LV	119	55601 BZ	150	6W3K45	133
2567 OZ-LV	119	55601 TT	150	MR1127K	134
2569 MB-LV	119	55602 BZ	150	MR827K	134

We want you to enjoy your experience with Hinkley.

We're proud to be a 4th generation family company, and we love what we do. We've been designing and creating products with the same level of style and quality we put in our own homes since 1922. So whether you are flipping through our catalog, surfing our site, getting inspired through social media, chatting with a member of our team or checking out our designs with one of our retailers, we're always looking for your experience with Hinkley to be a positive one. Here's all you need to know:

CATALOG COLLECTIONS

Hinkley catalogs feature our current and complete product line along with important product specs and detailed photography. A must for the print-loving researcher who likes to tab their favorites. Stop by your local showroom for your own copy.

HINKLEY.COM

Dive in! Our easy-to-use site makes your product research process a snap, with the added benefit of tips, trends, installation guidelines and a quick connection to our retail partners.

#HINKLEYSTYLE

We love seeing how you live and sharing ideas and inspiration with each other. Stay in the loop on all Hinkley happenings, from your favorites styles, the best (seriously) giveaways, helpful tips, our latest collabs, Team Hinkley shenanigans, and brand new design drops. @hinkleylighting



TEAM HINKLEY

Want to chat? Contact us at customercare@hinkley.com or 1.800.HINKLEY.


Hinkley stands behind the quality of our lighting fixtures and ceiling fans with product warranties that are among the strongest in the industry. For details of warranty coverage on specific products, please refer to hinkley.com or consult a qualified Hinkley retail distributor.

Several Hinkley products are protected under U.S. Patent and foreign patent, or patent pending.

WELCOME TO THE FAMILY

We stand by every fixture we make but we know that sometimes things happen. Simply register your fixture so we can answer any questions as quickly as possible. Just head over to hinkley.com/register. We're always here if you have a question, need some help, or want to chat about our products.

©2023 Hinkley, Inc. All rights reserved in all copyrightable works.



Hinkley is a proud partner of the American Lighting Association.

HINKLEY

HINKLEY.COM

GLOBAL HEADQUARTERS

33000 Pin Oak Parkway | Avon Lake, Ohio 44012
T 440 653 5500 | F 440 653 5555 | hinkley.com

SHOWROOM

Dallas Trade Mart 3210 | Dallas, Texas 75207
High Point Market MS290 | High Point, North Carolina 27260



Connect with us | [#hinkleystyle](https://www.instagram.com/hinkleystyle)

2023 LANDSCAPE
CATALOG LSCAT23

