
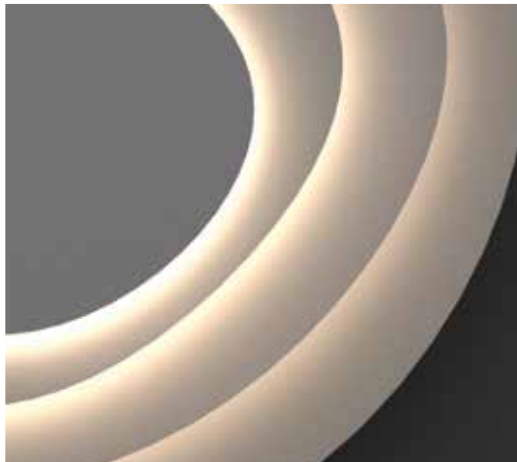


ADDITIONS

THREE

2017

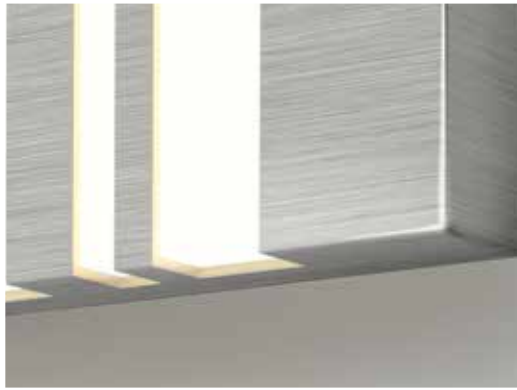

SONNEMAN[®]
A WAY OF LIGHT

ADDITIONS	
THREE	2017

2017

Driven to discover new insight and to test boundaries, our creative process achieved a new wave of sculptural expression. In our pursuit of technology-driven design, we took functional decorative to a fresh aesthetic with new forms and materials. We expanded the scope and utility of the Suspenders® system and added new range to Inside-Out®. Our mission to grow better, not bigger, has driven our growth in both. We continue to improve.

-Robert Sonneman



ADDITIONS THREE | 2017

infinity reflections	04	reals	68
infinity	10	jazz notes	76
waveforms™	14	band	78
abstract rhythms	22	box	79
abstract panels	28	triform compact	79
lotus	30	triform	80
float	33	curved shield	83
light guide ring	36	glass glow ²	84
cantina	42	box column	85
liquid	46	inset	86
champagne bubbles	54	reveal	87
fontanna	58	prairie	88
fontanna shield	60	reals bollards	90
solid glass bar	62	triform compact bollards	94
bath notes	64	shear bollards	94
oculus	66	box bollards	94



infinity reflections



infinity reflections

2669

Infinity Reflections Wide LED Pendant

11 3/4" H x 48" W x 21 1/2" D

Shade: Solid Surface Housing and Reflector

Canopy: 1 3/4" H x 18 1/4" W x 6 3/4" D w/6' Adjustable Cords

LED: 39w, 3875 Lumens (2910 Net Lumens)

Warm White (3000K), 90 CRI

100-277VAC Input w/LED Driver in Canopy

Dimmable by Electronic Low Voltage (ELV),

Standard (TRIAC) Incandescent (at 120VAC only),

or 0-10V

2669.03 Satin White

2669.18 Dove Gray

2669.18



2668.03



2667.18

infinity reflections

2668

Infinity Reflections LED Pendant with Downlight

10" H x 27 3/4" DIA

Shade: Die Cast Aluminum w/ Solid Surface Reflector

Canopy: 1 3/4" H x 7 1/2" DIA w/6' Adjustable Cords

LED: 21w, 1975 Lumens (total), 455 Lumens Down

(1105 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

2668.03 Satin White

2668.18 Dove Gray

2667

Infinity Reflections LED Pendant

10" H x 27 3/4" DIA

Shade: Die Cast Aluminum w/ Solid Surface Reflector

Canopy: 1 3/4" H x 7 1/2" DIA w/6' Adjustable Cords

LED: 21w, 2230 Lumens (1850 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

2667.03 Satin White

2667.18 Dove Gray

An organically shaped cast stone-like material glows in the reflection of illumination from a wavelike LED luminaire suspended below. Changing the perspective view transforms the perception of its amorphous shape, revealing and concealing the ebb and flow of its subtle form.



2666.03



2665.18

2666

Infinity LED Pendant with Downlight

2" H x 9" DIA

Shade: Die Cast Aluminum

Canopy: 1 1/4" H x 6 3/4" DIA w/6' Adjustable Cords
LED: 21w, 1975 Lumens (total), 455 Lumens Down
(1105 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2666.03 Satin White

2666.18 Dove Gray

2665

Infinity LED Pendant

2" H x 9" DIA

Shade: Die Cast Aluminum

Canopy: 1 1/4" H x 6 3/4" DIA w/6' Adjustable Cords
LED: 21w, 2230 Lumens (1850 Net Lumens)
Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2665.03 Satin White


2665.18 Dove Gray

infinity

A flowing infinity curve sweeps the edge of this sensually sculptured, multipurpose die-cast LED luminaire. Reflecting its luminous radiance off surfaces above, Infinity is also available with a directional LED downlight.



2662.03

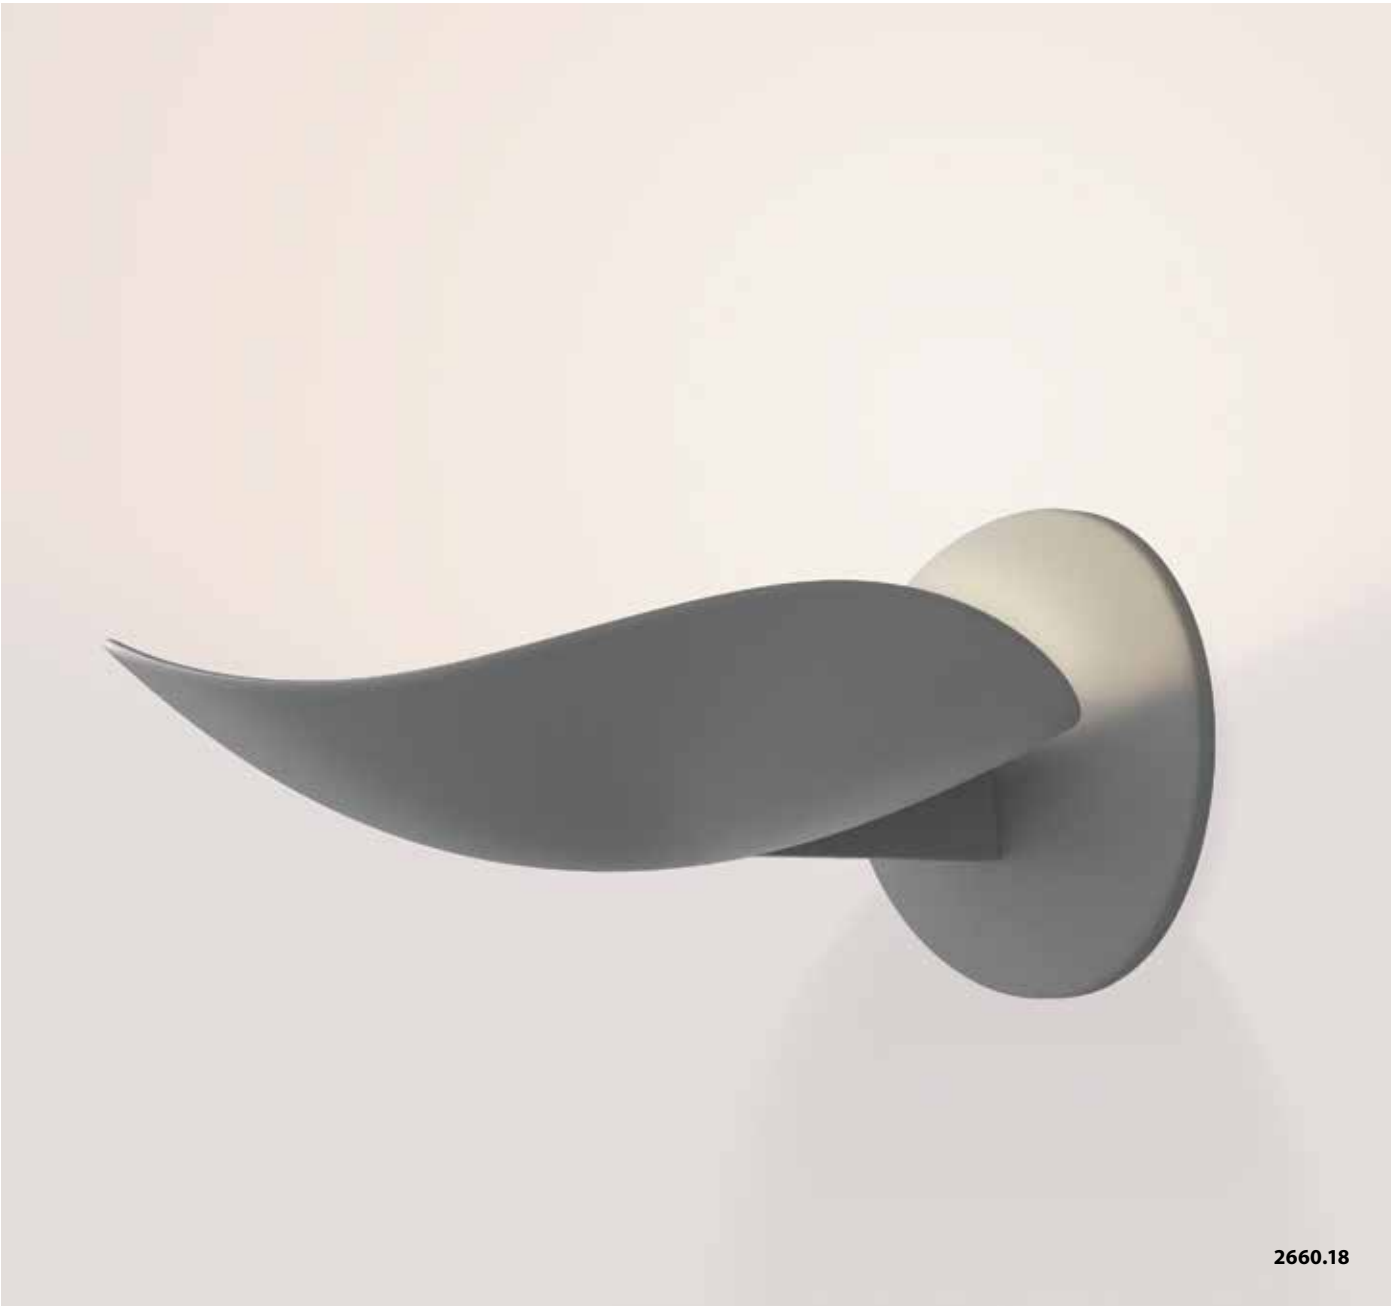

2660.18

infinity

2662

Infinity LED Wall Torchiera with Downlight

2" H x 8 1/2" W
Shade: Die Cast Aluminum
2" H x 9" DIA
Extension: 9 1/2"
Wall Plate: 5" DIA
LED: 21w, 1975 Lumens (total), 455 Lumens Down
(1105 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2662.03 Satin White
2662.18 Dove Gray

2660

Infinity LED Wall Torchiera

2" H x 8 1/2" W
Shade: Die Cast Aluminum
2" H x 9" DIA
Extension: 9 1/2"
Wall Plate: 5" DIA
LED: 21w, 2230 Lumens (1850 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2660.03 Satin White
2660.18 Dove Gray

waveforms™

A luminous interior surface peeks through a rhythm of undulations, revealing the light from within these dramatic LED pendants. Shaped in a deep bell or as a broader dome, these sculptural forms are available in several sizes and finishes.





2675.25W

waveforms™



2675.25W

2676.25A

2675

Waveforms Small Bell LED Pendant

15" H x 14" DIA
Shade: Aluminum
Canopy: ½" H x 4 ½" DIA w/6' Adjustable Cord
LED: 11w, 1000 Lumens (205 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2675.03A Satin White w/Apricot Interior
2675.03W Satin White w/Satin White Interior
2675.18W Dove Gray w/Satin White Interior
2675.25A Satin Black w/Apricot Interior
2675.25W Satin Black w/Satin White Interior

2676

Waveforms Large Bell LED Pendant

25" H x 23 ¼" DIA
Shade: Aluminum
Canopy: ½" H x 4 ½" DIA w/6' Adjustable Cord
LED: 21w, 1900 Lumens (1015 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2676.03A Satin White w/Apricot Interior
2676.03W Satin White w/Satin White Interior
2676.18W Dove Gray w/Satin White Interior
2676.25A Satin Black w/Apricot Interior
2676.25W Satin Black w/Satin White Interior



2674.03W

waveforms™

2674 (shown above)

Waveforms Large Dome LED Pendant

14 1/4" H x 34 1/2" DIA
Shade: Aluminum
Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cords
LED: 21w, 1900 Lumens (1235 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2674.03A Satin White w/Apricot Interior
2674.03W Satin White w/Satin White Interior
2674.18W Dove Gray w/Satin White Interior
2674.25A Satin Black w/Apricot Interior
2674.25W Satin Black w/Satin White Interior

2673 (shown right)

Waveforms Small Dome LED Pendant

8 1/2" H x 22 1/2" DIA
Shade: Aluminum
Canopy: 1/2" H x 4 1/2" DIA w/6' Adjustable Cord
LED: 11w, 1000 Lumens (635 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2673.03A Satin White w/Apricot Interior
2673.03W Satin White w/Satin White Interior
2673.18W Dove Gray w/Satin White Interior
2673.25A Satin Black w/Apricot Interior
2673.25W Satin Black w/Satin White Interior



2674.25A

2673.25W




2673.03W

SONNEMAN
A WAY OF LIGHT



2671.03W

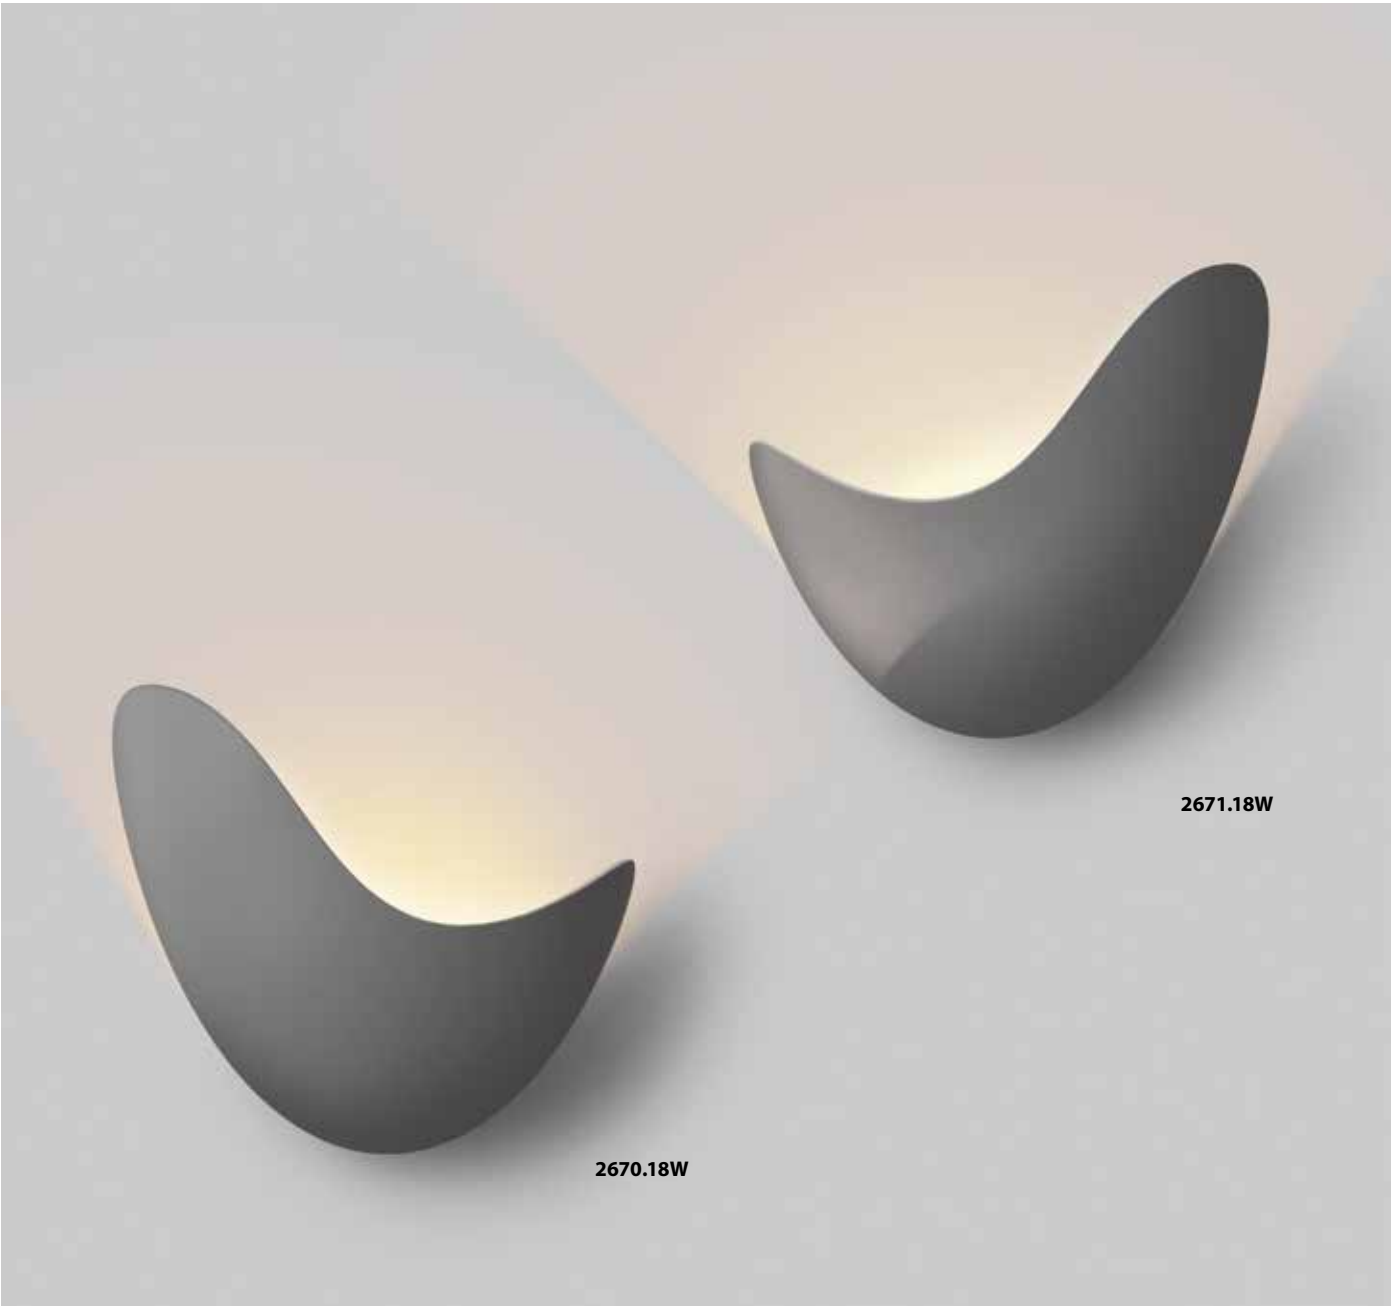

2670.18W

2671.18W

waveforms™

2670

Waveforms Left LED Sconce

10" H x 11 1/2" W
Shade: Aluminum
Extension: 5 1/2"
Wall Plate: 4 3/4" H x 8 1/4" W
LED: 12w, 840 Lumens (485 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 2670.03W** Satin White w/Satin White Interior
- 2670.18W** Dove Gray w/Satin White Interior
- 2670.25W** Satin Black w/Satin White Interior

2671

Waveforms Right LED Sconce

10" H x 11 1/2" W
Shade: Aluminum
Extension: 5 1/2"
Wall Plate: 4 3/4" H x 8 1/4" W
LED: 12w, 840 Lumens (485 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 2671.03W** Satin White w/Satin White Interior
- 2671.18W** Dove Gray w/Satin White Interior
- 2671.25W** Satin Black w/Satin White Interior



abstract rhythms

2695

Abstract Rhythms LED Pendant

8 1/4" H x 25 1/2" DIA

Shade: Metal w/Optical Acrylic Diffuser

Canopy: 1 1/2" H x 7" DIA w/6' Adjustable Cables

LED: 27w, 2375 Lumens (1500 Net Lumens)

Warm White (3000K), 90 CRI

100-277VAC Input w/LED Driver in Canopy


Dimmable by Electronic Low Voltage (ELV),

Standard (TRIAC) Incandescent (at 120VAC only),

or 0-10V

2695.98 Textured White

Flowing abstract shapes, layered in progression, form both linear and three-sided curved volumes of luminous reflections. LED light radiates from the center outward, through voids in the layers from a perfectly-fit luminaire within the center.

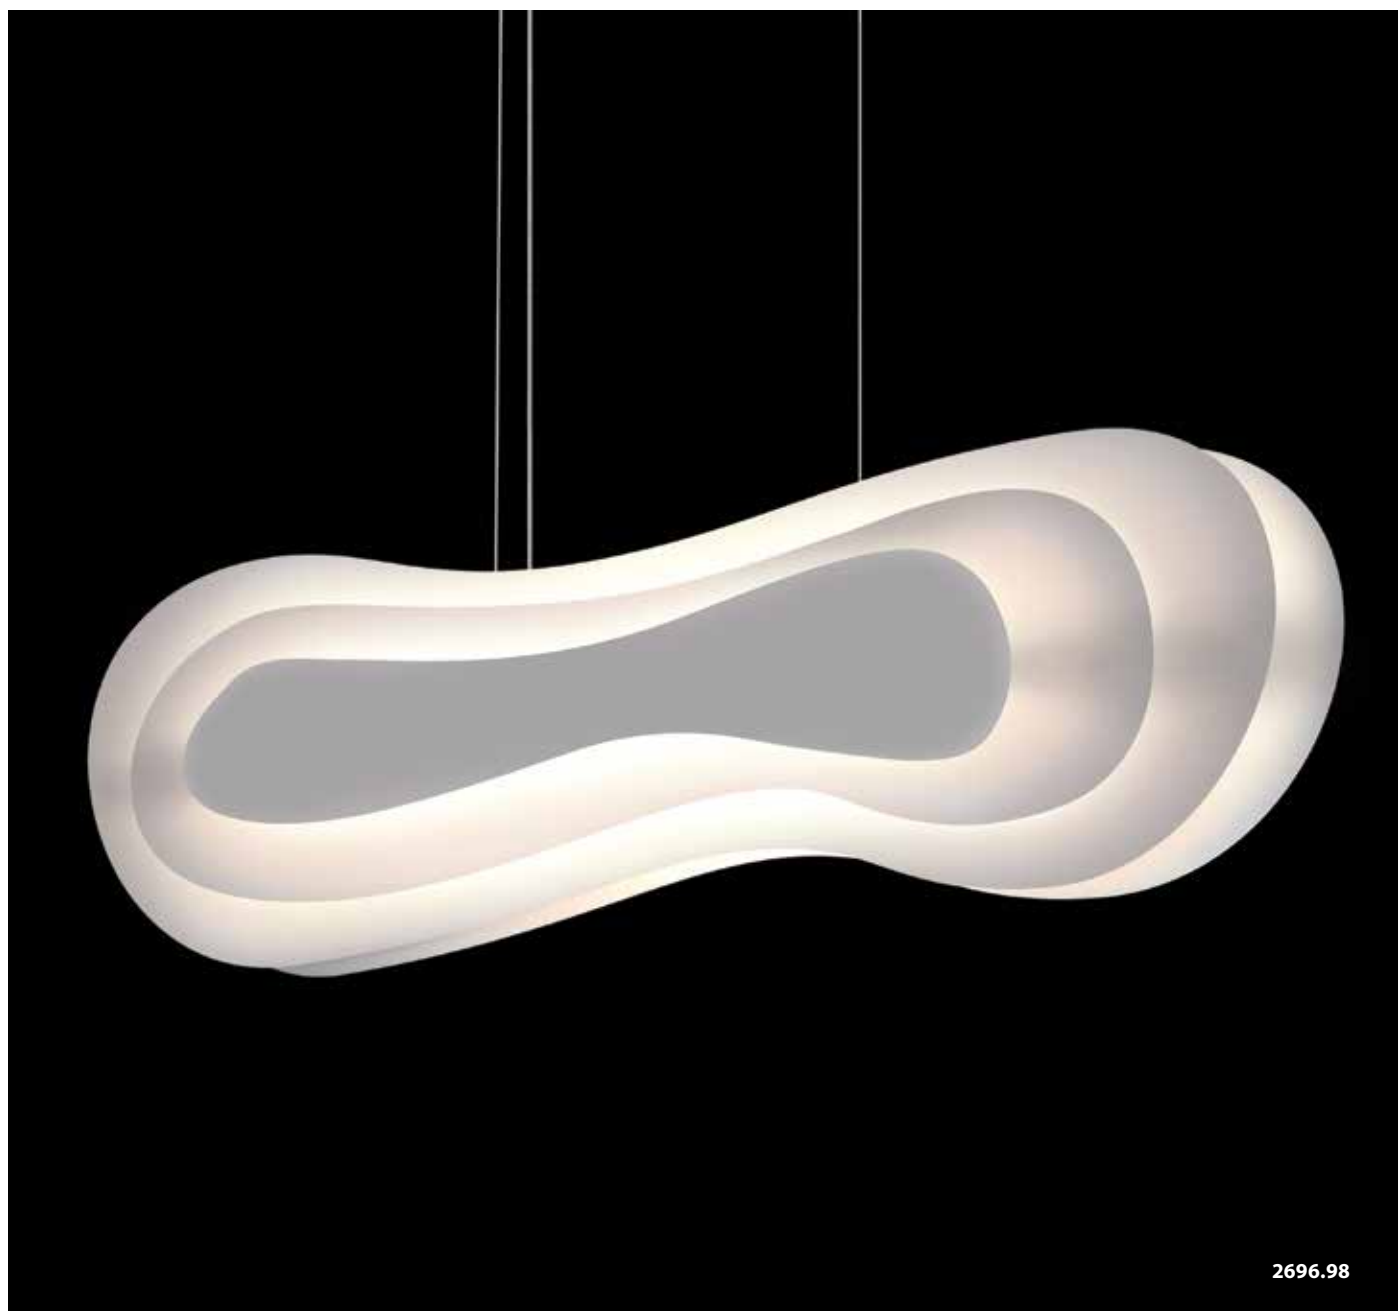

2696.98

abstract rhythms

2696

Abstract Rhythms Wide LED Pendant

9 1/2" H x 32" W x 7" D
 Shade: Metal w/Optical Acrylic Diffuser
 Canopy: 1 1/4" H x 15" W x 6" D w/6' Adjustable Cables
 LED: 30w, 2590 Lumens (1260 Net Lumens)
 Warm White (3000K), 90 CRI
 100-277VAC Input w/LED Driver in Canopy
 Dimmable by Electronic Low Voltage (ELV),
 Standard (TRIAC) Incandescent (at 120VAC only),
 or 0-10V

2696.98 Textured White



2697.98

abstract rhythms

2697

Abstract Rhythms Tall LED Pendant

21 1/2" H x 12 1/2" DIA

Shade: Metal w/Optical Acrylic Diffuser

Canopy: 1 1/4" H x 6" DIA w/6' Adjustable Cables

LED: 30w, 2590 Lumens (1050 Net Lumens)

Warm White (3000K), 90 CRI

100-277VAC Input w/LED Driver in Canopy

Dimmable by Electronic Low Voltage (ELV),

Standard (TRIAC) Incandescent (at 120VAC only),

or 0-10V

2697.98 Textured White

abstract panels

LED illumination is emitted through the layered voids of abstract-shaped panels. The river stone shapes infuse these surface mounted panels with a natural essence. Used individually or set in composition with others. Abstract Panels brings an intriguing tone of sculptured art to a surface, wall, or ceiling.



2690

Abstract Panels Small 2-Plate LED Sconce

11 1/4" DIA
Shade: Metal
Extension: 2"
Wall Plate: 6 3/4" DIA
LED: 14w, 780 Lumens (300 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

2690.98 Textured White

2692

Abstract Panels Large 2-Plate LED Sconce

14 1/2" DIA
Shade: Metal
Extension: 2"
Wall Plate: 6 3/4" DIA
LED: 14w, 780 Lumens (300 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

2692.98 Textured White

2694

Abstract Panels 4-Plate LED Sconce

18" DIA
Shade: Metal
Extension: 3 3/4"
Wall Plate: 6 3/4" DIA
LED: 14w, 780 Lumens (300 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
ADA

2694.98 Textured White



lotus

A SYMBOL OF ENLIGHTENMENT

White, curved forms, arrayed in suspension, direct bright light up, down, and through the spaces between its lotus-like petals, producing soft luminous reflections and a radiant glow.

2643

Lotus Pendant

10 ¼" H X 19 ¾" DIA

Shade: Metal w/Optical Acrylic Diffuser

Canopy: ½" H X 5" DIA

Stem Kit: (3) 12" + (1) 6"

Bulb: (2) 60w Medium Base

2643.03 Satin White

2645

Lotus Large Pendant

13 ½" H X 25 ½" DIA


Shade: Metal w/Optical Acrylic Diffuser

Canopy: ½" H X 5" DIA

Stem Kit: (3) 12" + (1) 6"

Bulb: (3) 60w Medium Base

2645.03 Satin White

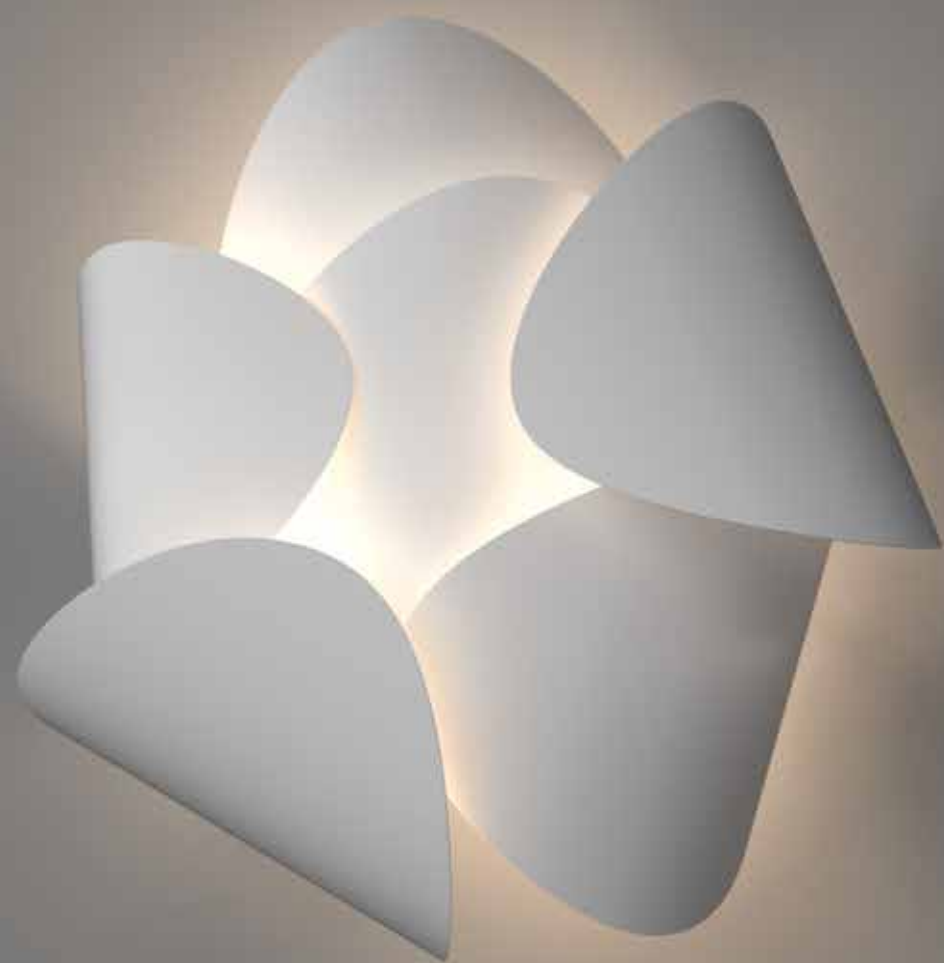

lotus

2640

Lotus LED Sconce

12 1/2" DIA

Shade: Metal

Extension: 6 1/2"

Wall Plate: 6" DIA

Bulb: (1) 9w, GU24 Base LED Bulb (included)

850 Lumens, Warm White (3000K), 80 CRI

120VAC Input

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

2640.03 Satin White

2640.03



float

Reimagined from our original 1980s modern classic, "Floating Glass," this clear glass disk floats on a softly shaped, bright LED core. Light is directed downward and transmitted through its clear glass disk to its edges, emitting a dramatic ring of light. Float is also available with a white etched glass disk that radiates light from the entire glass surface.

SONNEMAN
A WAY OF LIGHT



float

2622

Float 24" LED Pendant

1 1/4" H x 24" DIA
Shade: Die Cast Aluminum w/Optical Acrylic
1 1/4" H x 13" DIA
Canopy: 3/4" H x 4 1/2" DIA w/6' Adjustable Cords
LED: 20w, 1810 Lumens (1090 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2622.01 Polished Chrome w/Clear Glass
2622.13 Satin Nickel w/Etched Glass



2620

Float 18" LED Pendant

1 1/4" H x 18" DIA
Shade: Die Cast Aluminum w/Optical Acrylic
1 1/4" H x 13" DIA
Canopy: 3/4" H x 4 1/2" DIA w/6' Adjustable Cords
LED: 20w, 1810 Lumens (1090 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

2620.01 Polished Chrome w/Clear Glass
2620.13 Satin Nickel w/Etched Glass





2656.25A



2656.03W

light guide ring

Floating within an aluminum ring, an LED source edge-lights a light guide disk that redirects its luminance to its upper and lower surfaces, producing a glare-free radiance. Arranged in single and multiple configurations, the Light Guide Rings offer exciting illuminating solutions to both larger and smaller environments.

2656

Light Guide Ring 9-Light LED Pendant

1 1/2" H x 48 1/4" DIA
Shade: Aluminum w/Acrylic Light Guide Disk
1 1/2" H x 8" DIA

Canopy: 1 1/2" H x 8" DIA w/6' Adjustable Cords
LED: (9) 60w (total), 5517 Lumens (4860 Net Lumens)
Warm White (3000K), 90 CRI
100-277VAC Input w/LED Driver in Canopy
Dimmable by Electronic Low Voltage (ELV),
Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

2656.03A Satin White w/Apricot Interior
2656.03W Satin White w/Satin White Interior
2656.25A Satin Black w/Apricot Interior
2656.25W Satin Black w/Satin White Interior



2655.25W



2654.25A

2655

Light Guide Ring 4-Light LED Bar Pendant

1 1/2" H x 37 1/2" W x 17 1/2" D
Shade: Aluminum w/Acrylic Light Guide Disk
1 1/2" H x 8" DIA
Canopy: 1 1/4" H x 8" W x 5" D w/6' Adjustable Cords
LED: (4) 38w (total), 3310 Lumens (2920 Net Lumens)
Warm White (3000K), 90 CRI
100-277VAC Input w/LED Driver in Canopy
Dimmable by Electronic Low Voltage (ELV),
Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

2655.03A Satin White w/Apricot Interior
2655.03W Satin White w/Satin White Interior
2655.25A Satin Black w/Apricot Interior
2655.25W Satin Black w/Satin White Interior

2654

Light Guide Ring 3-Light LED Pendant

1 1/2" H x 18 1/2" DIA
Shade: Aluminum w/Acrylic Light Guide Disk
1 1/2" H x 8" DIA
Canopy: 1 1/4" H x 6" DIA
Stem Kit: (3) 12" + (1) 6"
LED: (3) 30w (total), 2535 Lumens (2235 Net Lumens)
Warm White (3000K), 90 CRI
100-277VAC Input w/LED Driver in Canopy
Dimmable by Electronic Low Voltage (ELV),
Standard (TRIAC) Incandescent (at 120VAC only),
or 0-10V

2654.03A Satin White w/Apricot Interior
2654.03W Satin White w/Satin White Interior
2654.25A Satin Black w/Apricot Interior
2654.25W Satin Black w/Satin White Interior



light guide ring

The Light Guide Ring uses an innovative system of redirected, glare-free, LED illumination. The light guide transmits light from an LED source at its edge, evenly distributing the light over the face of the light guide through a precisely engineered pattern of light extraction points that provide an evenly lit, low-glare appearance, while maintaining the translucency of the optically clear acrylic disk.



2653
Light Guide Ring 2-Light LED Pendant
4 1/4" H x 18 1/2" W x 8" D
Shade: Aluminum w/Acrylic Light Guide Disk
1 1/2" H x 8" DIA
Canopy: 1/2" H x 5" DIA w/6' Adjustable Cords
LED: (2) 21w (total), 1815 Lumens (1600 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 2653.03A Satin White w/Apricot Interior
- 2653.03W Satin White w/Satin White Interior
- 2653.25A Satin Black w/Apricot Interior
- 2653.25W Satin Black w/Satin White Interior

2652
Light Guide Ring LED Pendant
16" H x 7 3/4" W x 8 1/2" D
Shade: Aluminum w/Acrylic Light Guide Disk
1 1/2" H x 8" DIA
Canopy: 1/2" H x 5" DIA w/6' Adjustable Cord
LED: 13w, 1055 Lumens (930 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 2652.03A Satin White w/Apricot Interior
- 2652.03W Satin White w/Satin White Interior
- 2652.25A Satin Black w/Apricot Interior
- 2652.25W Satin Black w/Satin White Interior



2650
Light Guide Ring LED Sconce
1 1/2" H x 8" W
Shade: Aluminum w/Acrylic Light Guide Disk
1 1/2" H x 8" DIA
Extension: 9"
Wall Plate: 5" DIA
LED: 13w, 1055 Lumens (930 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 2650.03A Satin White w/Apricot Interior
- 2650.03W Satin White w/Satin White Interior
- 2650.25A Satin Black w/Apricot Interior
- 2650.25W Satin Black w/Satin White Interior

2651
Light Guide Ring Double LED Sconce
1 1/2" H x 17" W
Shade: Aluminum w/Acrylic Light Guide Disk
1 1/2" H x 8" DIA
Extension: 8 1/2"
Wall Plate: 5" DIA
LED: (2) 21w (total), 1815 Lumens (1600 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

- 2651.03A Satin White w/Apricot Interior
- 2651.03W Satin White w/Satin White Interior
- 2651.25A Satin Black w/Apricot Interior
- 2651.25W Satin Black w/Satin White Interior

light guide ring



A flask-like flat oval glass profile, suspended from a slender cable, rotates randomly to various orientations creating an asymmetric relationship to its surroundings. A single point source of LED illumination within the void of the larger glass volume creates a special aesthetic tension of scales.

cantina

2996

Cantina 6-Light Tri-Spreader LED Pendant

14 3/4" H x 42" DIA

Shade: Glass

(3) 9" H x 9" W x 3" D

(3) 11 3/4" H x 12" W x 3 3/4" D

Canopy: 1 1/4" H x 6" DIA w/10' Adjustable Cords

Bulb: (6) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Canopy
Dimmable by Electronic Low Voltage (ELV)

2996.25C Satin Black w/Clear Glass

2996.25K Satin Black w/Smoke Fade Glass

2996.25W Satin Black w/Poured White Glass

2995

Cantina 3-Light Tri-Spreader LED Pendant

12" to 19 1/4" H x 30" to 36" DIA

Shade: Glass

9" H x 9" W x 3" D (for -SML option)

11 3/4" H x 12" W x 3 3/4" D (for -MED option)

14 1/2" H x 15" W x 4 1/2" D (for -LRG option)

Canopy: 1 1/4" H x 6" DIA w/10' Adjustable Cords

Bulb: (3) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer in Canopy
Dimmable by Electronic Low Voltage (ELV)

2995.25C-SML Satin Black w/Small Clear Glass

2995.25K-SML Satin Black w/Small Smoke Fade Glass

2995.25W-SML Satin Black w/Small Poured White Glass

2995.25C-MED Satin Black w/Med. Clear Glass

2995.25K-MED Satin Black w/Med. Smoke Fade Glass

2995.25W-MED Satin Black w/Med. Poured White Glass

2995.25C-LRG Satin Black w/Large Clear Glass

2995.25K-LRG Satin Black w/Large Smoke Fade Glass

2995.25W-LRG Satin Black w/Large Poured White Glass

2997

Cantina 9-Light Tri-Spreader LED Pendant

19 1/4" H x 57" DIA

Shade: Glass

(3) 9" H x 9" W x 3" D

(3) 11 3/4" H x 12" W x 3 3/4" D

(3) 14 1/2" H x 15" W x 4 1/2" D

Canopy: 1 1/4" H x 6" DIA w/10' Adjustable Cords

Bulb: (9) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer in Canopy
Dimmable by Electronic Low Voltage (ELV)

2997.25C Satin Black w/Clear Glass

2997.25K Satin Black w/Smoke Fade Glass

2997.25W Satin Black w/Poured White Glass



2990.25C-LRG

2990.25C-MED

2990.25C-SML

cantina

Cantina is an object of kinetic art that can be hung individually, in multiples, or with spreaders to form larger diameter arrangements. Available in three sizes with glass options of clear, smoke fade, and poured white.

2990-LRG

Cantina Large LED Pendant

18 ¾" H x 15" W x 4 ½" D

Shade: Glass

14 ¾" H x 15" W x 4 ½" D

Canopy: ¾" H x 5" DIA w/10' Adjustable Cord

Bulb: (1) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2990.25C-LRG Satin Black w/Clear Glass

2990.25K-LRG Satin Black w/Smoke Fade Glass

2990.25W-LRG Satin Black w/Poured White Glass

2990-MED

Cantina Medium LED Pendant

14" H x 12" W x 3 ¾" D

Shade: Glass

11 ¾" H x 12" W x 3 ¾" D

Canopy: ¾" H x 5" DIA w/10' Adjustable Cord

Bulb: (1) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2990.25C-MED Satin Black w/Clear Glass

2990.25K-MED Satin Black w/Smoke Fade Glass

2990.25W-MED Satin Black w/Poured White Glass

2990-SML

Cantina Small LED Pendant

11 ¼" H x 9" W x 3" D

Shade: Glass

9" H x 9" W x 3" D

Canopy: ¾" H x 5" DIA w/10' Adjustable Cord

Bulb: (1) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2990.25C-SML Satin Black w/Clear Glass

2990.25K-SML Satin Black w/Smoke Fade Glass

2990.25W-SML Satin Black w/Poured White Glass



2990.25C-LRG

liquid

The surface contours of this meteor-like glass volume have the softened look of melting glass. The visual weight of this amorphous sculpture is glorified by the thinness of the cable from which it hangs and the single point source of LED illumination within its contoured volume.

2973

Liquid 3-Light Linear Spreader LED Pendant

11 1/2" H x 36 1/2" W x 6" D
 Shade: Glass
 9 3/4" H x 6" DIA
 Canopy: 3/4" H x 8" W x 5" D w/10' Adjustable Cords
 Bulb: (3) 4w, G4 Base LED Bulb (included)
 200 Lumens, Warm White (3000K), 90 CRI
 120VAC Input w/24VAC Transformer in Outlet Box
 Dimmable by Electronic Low Voltage (ELV)

2973.25C	Satin Black w/Clear Glass
2973.25K	Satin Black w/Smoke Fade Glass
2973.25W	Satin Black w/Poured White Glass



2973.25K



2973.25W



2971.25K

liquid

2970

Liquid LED Pendant

10 3/4" H x 6" DIA

Shade: Glass

9 3/4" H x 6" DIA

Canopy: 3/4" H x 5" DIA w/10' Adjustable Cord

Bulb: (1) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2970.25C Satin Black w/Clear Glass

2970.25K Satin Black w/Smoke Fade Glass

2970.25W Satin Black w/Poured White Glass



2970.25C

2971

Liquid 3-Light Round LED Pendant

10 3/4" H x 14" DIA

Shade: Glass

9 3/4" H x 6" DIA

Canopy: 3/4" H x 10" DIA w/10' Adjustable Cords

Bulb: (3) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2971.25C Satin Black w/Clear Glass

2971.25K Satin Black w/Smoke Fade Glass

2971.25W Satin Black w/Poured White Glass



2971.25C



liquid

2977

Liquid 9-Light Tri-Spreader LED Pendant

11 1/2" H X 51" DIA

Shade: Glass

9 3/4" H X 6" DIA

Canopy: 1 1/4" H X 6" DIA W/10' Adjustable Cords

Bulb: (9) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Canopy

Dimmable by Electronic Low Voltage (ELV)

2977.25C Satin Black w/Clear Glass
2977.25K Satin Black w/Smoke Fade Glass
2977.25W Satin Black w/Poured White Glass

2975

Liquid 3-Light Tri-Spreader LED Pendant

11 1/2" H X 27" DIA

Shade: Glass

9 3/4" H X 6" DIA

Canopy: 1 1/4" H X 6" DIA W/10' Adjustable Cords

Bulb: (3) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Canopy

Dimmable by Electronic Low Voltage (ELV)

2975.25C Satin Black w/Clear Glass
2975.25K Satin Black w/Smoke Fade Glass
2975.25W Satin Black w/Poured White Glass

2976

Liquid 6-Light Tri-Spreader LED Pendant

11 1/2" H X 39 1/4" DIA

Shade: Glass

9 3/4" H X 6" DIA

Canopy: 1 1/4" H X 6" DIA W/10' Adjustable Cords

Bulb: (6) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Canopy

Dimmable by Electronic Low Voltage (ELV)

2976.25C Satin Black w/Clear Glass
2976.25K Satin Black w/Smoke Fade Glass
2976.25W Satin Black w/Poured White Glass



2981.25C

2980

Liquid Large LED Pendant

22" H x 10 1/2" DIA

Shade: Glass

18" H x 10 1/2" DIA

Canopy: 3/4" H x 5" DIA w/10' Adjustable Cable

Bulb: (1) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2980.25C Satin Black w/Clear Glass

2980.25K Satin Black w/Smoke Fade Glass

2980.25W Satin Black w/Poured White Glass



2980.25K

2981

Liquid Large 3-Light Round LED Pendant

22" H x 22 1/2" DIA

Shade: Glass

18" H x 10 1/2" DIA

Canopy: 3/4" H x 15" DIA w/10' Adjustable Cables

Bulb: (3) 4w, G4 Base LED Bulb (included)

200 Lumens, Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

2981.25C Satin Black w/Clear Glass

2981.25K Satin Black w/Smoke Fade Glass

2981.25W Satin Black w/Poured White Glass

liquid

Liquid pendants are available in clear, smoke fade, and poured white glass. They can be hung individually, in multiples, or with spreaders to form larger arrangements.




champagne bubbles

Light dances through a dazzling array of tiny bubbles within the solid mass of each glass crystal ball. A single source of LED illumination becomes refracted and diffused from within its effervescent volume. Champagne Bubbles can be hung singly or in multiple arrangements from a range of canopy sizes.



(Custom configuration shown)

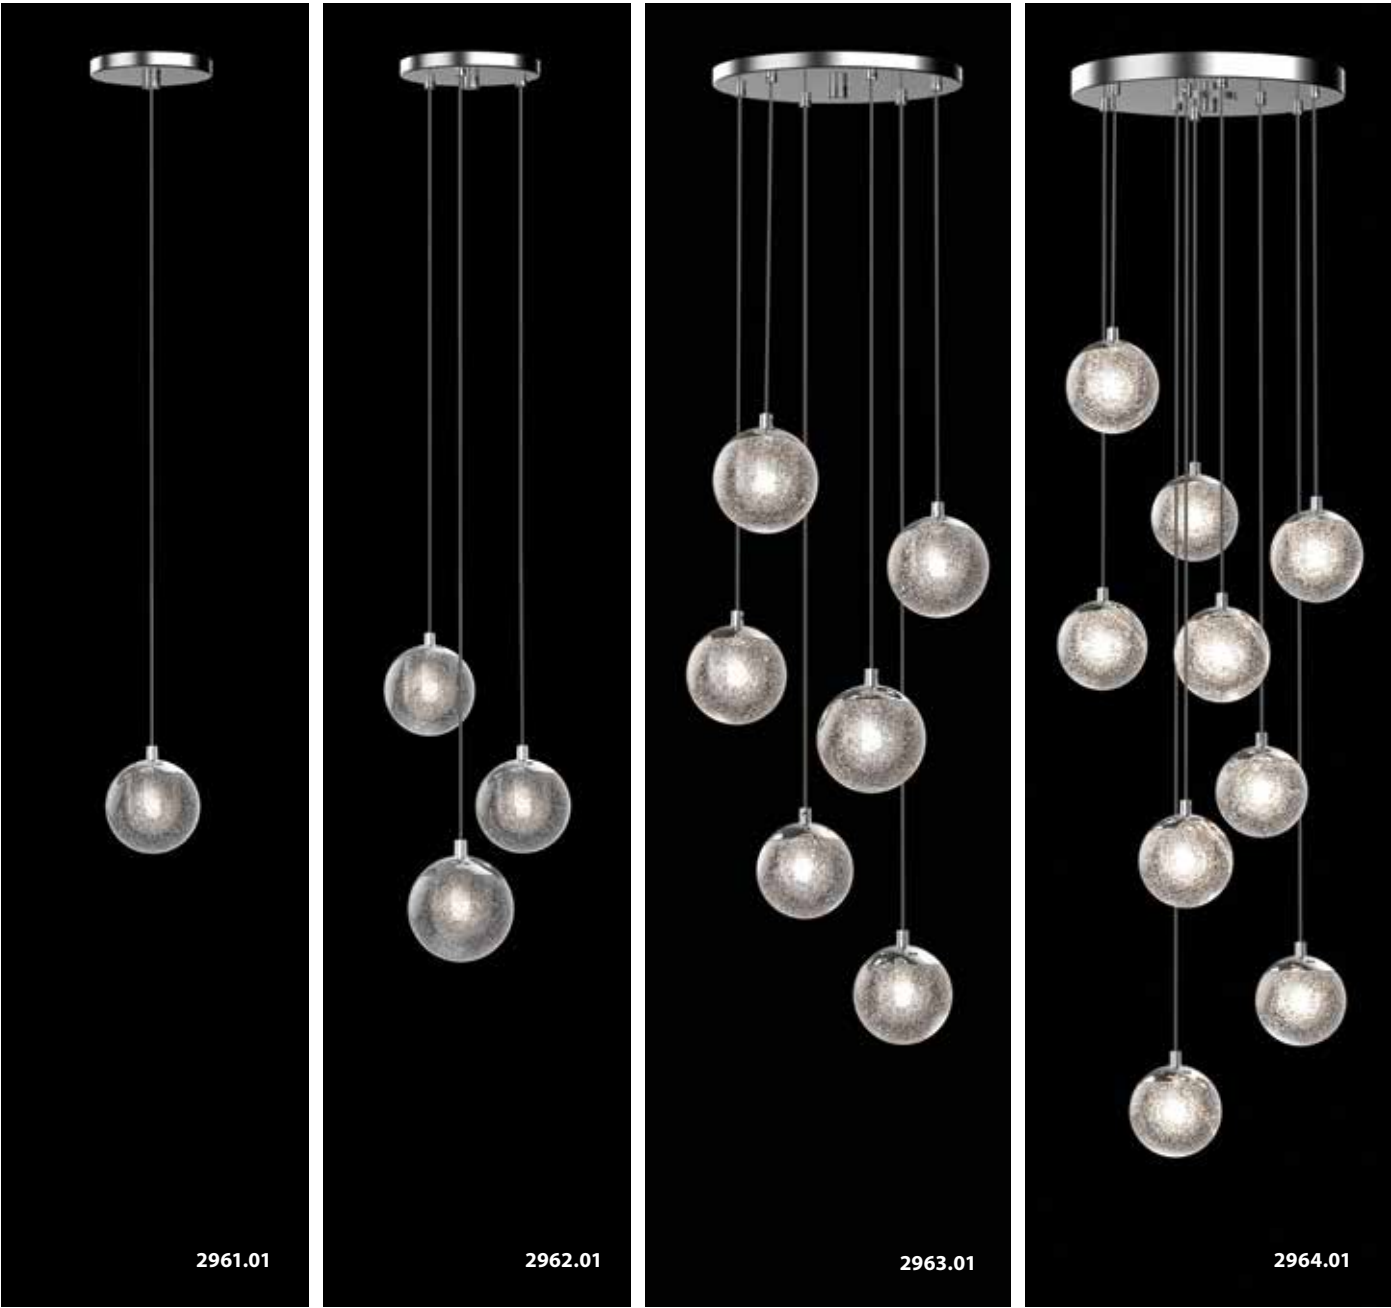

champagne bubbles

2961 Champagne Bubbles LED Pendant

4 1/2" H x 4" DIA
Shade: Clear Seeded Glass
3 1/4" H x 4" DIA
Canopy: 3/4" H x 5" DIA w/10' Adjustable Cord
Bulb: (1) 4w, G4 Base LED Bulb (included)
220 Lumens, Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

2961.01 Polished Chrome

2962 Champagne Bubbles 3-Light Round LED Pendant

4 1/2" H x 8 1/2" DIA
Shade: Clear Seeded Glass
3 1/4" H x 4" DIA
Canopy: 3/4" H x 6" DIA w/10' Adjustable Cords
Bulb: (3) 4w, G4 Base LED Bulb (included)
220 Lumens, Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

2962.01 Polished Chrome

2963 Champagne Bubbles 6-Light Round LED Pendant

4 1/2" H x 12" DIA
Shade: Clear Seeded Glass
3 1/4" H x 4" DIA
Canopy: 3/4" H x 10" DIA w/10' Adjustable Cords
Bulb: (6) 4w, G4 Base LED Bulb (included)
220 Lumens, Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

2963.01 Polished Chrome

2964 Champagne Bubbles 9-Light Round LED Pendant

4 1/2" H x 14" DIA
Shade: Clear Seeded Glass
3 1/4" H x 4" DIA
Canopy: 1" H x 12" DIA w/10' Adjustable Cords
Bulb: (9) 4w, G4 Base LED Bulb (included)
220 Lumens, Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer
Dimmable by Electronic Low Voltage (ELV)

2964.01 Polished Chrome

2965 Champagne Bubbles 12-Light Round LED Pendant

4 1/2" H x 17 1/4" DIA
Shade: Clear Seeded Glass
3 1/4" H x 4" DIA
Canopy: 1" H x 15" DIA w/10' Adjustable Cords
Bulb: (12) 4w, G4 Base LED Bulb (included)
220 Lumens, Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer
Dimmable by Electronic Low Voltage (ELV)

2965.01 Polished Chrome

2966 Champagne Bubbles 24-Light Round LED Pendant

4 1/2" H x 27 1/4" DIA
Shade: Clear Seeded Glass
3 1/4" H x 4" DIA
Canopy: 1" H x 25" DIA w/10' Adjustable Cords
Bulb: (24) 4w, G4 Base LED Bulb (included)
220 Lumens, Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer
Dimmable by Electronic Low Voltage (ELV)

2966.01 Polished Chrome



2632.01



2632.13

fontanna

2632

Fontanna LED Sconce

20 1/2" DIA

Shade: Metal

4 3/4" DIA

Extension: 4"

Wall Plate: 4 3/4" DIA

LED: 13w, 1395 Lumens (410 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

ADA

2632.01 Polished Chrome

2632.03 Satin White

2632.13 Satin Nickel

A radial arrangement of whisper-like wires, like the arching streams of a fountain, catch the light from a semispherical reflector over an LED core, casting a dramatic array of hairline shadows on a surface.



2630.01



2630.03

fontanna shield

2630

Fontanna Shield LED Sconce

10" DIA

Shade: Metal

10" DIA

Extension: 3 3/4"

Wall Plate: 4 3/4" DIA

LED: 13w, 1395 Lumens (520 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

ADA

2630.01 Polished Chrome

2630.03 Satin White

2630.13 Satin Nickel

Fontanna Shield is a minimal source of surface reflected illumination. The semispherical reflector is available in three finishes.



2590.01

solid glass bar

A thick, Solid Glass Bar reveals a generous yet pristine luminous edge from a white glass surface. Captured precisely within a chrome rectilinear beam, this luxury modern LED bar is ingeniously mounted to a surface by concealed magnets, with no visible screws or surface interruptions. Use where perfection is demanded.

2590

Solid Glass Bar 18" LED Bath Bar

18" H x 2 3/4" W
Shade: Clear Glass
18" H x 2 3/4" W x 1/2" D
Extension: 2 1/4"
LED: 19w, 800 Lumens (430 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/24VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

2590.01 Polished Chrome
2590.13 Satin Nickel

2592

Solid Glass Bar 24" LED Bath Bar

24" H x 2 3/4" W
Shade: Clear Glass
24" H x 2 3/4" W x 1/2" D
Extension: 2 1/4"
LED: 24w, 1040 Lumens (560 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/24VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

2592.01 Polished Chrome
2592.13 Satin Nickel

2594

Solid Glass Bar 32" LED Bath Bar

32" H x 2 3/4" W
Shade: Clear Glass
32" H x 2 3/4" W x 1/2" D
Extension: 2 1/4"
LED: 32w, 1400 Lumens (750 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/24VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

2594.01 Polished Chrome
2594.13 Satin Nickel



2594.13

bath notes

An alternating arrangement of positive and negative spaces, in a varying pattern of thick and thin, suggests a visual jazz-like rhythm. This LED bath bar brings an unexpected interest and freshness to an otherwise predictable environment.



2611.01

2610

Bath Notes 18" LED Bath Bar

18" h x 5" w
Shade: Metal w/Optical Acrylic Diffuser
18" h x 5" w x 2 1/2" d
Extension: 3"
Wall Plate: 17 1/2" x 4 1/2"
LED: 17w, 910 Lumens (345 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

- 2610.01 Polished Chrome
- 2610.03 Satin White
- 2610.23 Satin Chrome

2611

Bath Notes 24" LED Bath Bar

24" h x 5" w
Shade: Metal w/Optical Acrylic Diffuser
24" h x 5" w x 2 1/2" d
Extension: 3"
Wall Plate: 23 1/2" x 4 1/2"
LED: 23w, 1250 Lumens (475 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

- 2611.01 Polished Chrome
- 2611.03 Satin White
- 2611.23 Satin Chrome

2612

Bath Notes 32" LED Bath Bar

32" h x 5" w
Shade: Metal w/Optical Acrylic Diffuser
32" h x 5" w x 2 1/2" d
Extension: 3"
Wall Plate: 31 1/2" x 4 1/2"
LED: 28w, 1575 Lumens (595 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

- 2612.01 Polished Chrome
- 2612.03 Satin White
- 2612.23 Satin Chrome

2613

Bath Notes 40" LED Bath Bar

40" h x 5" w
Shade: Metal w/Optical Acrylic Diffuser
40" h x 5" w x 2 1/2" d
Extension: 3"
Wall Plate: 39 1/2" x 4 1/2"
LED: 34w, 1950 Lumens (740 Net Lumens)
Warm White (3000K), 90 CRI
120VAC input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
ADA

- 2613.01 Polished Chrome
- 2613.03 Satin White
- 2613.23 Satin Chrome



2613.23



2613



2612



2611



2610

oculus


The geometry of this truncated cone perfectly defines its luminous objective as an architectural feature emitting LED light. Available in three sizes and finishes, Oculus can be used individually or arranged in groups of like or different sizes, for a broad pattern of architectural interest.



3732.35



3732.13

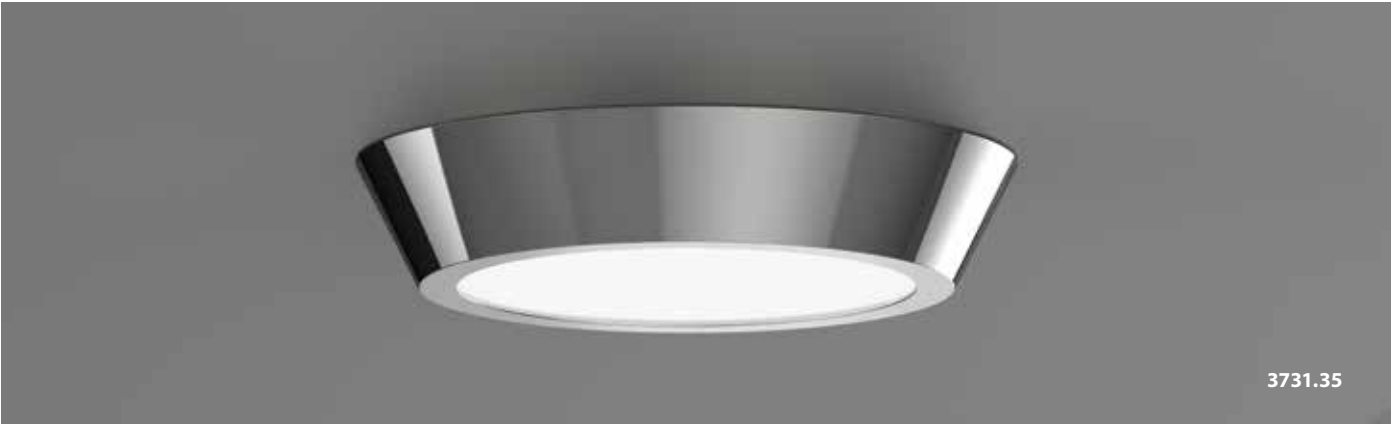

3731.35



3730.03

3730

Oculus 10" LED Surface Mount

2 1/2" H x 10" DIA
Shade: Metal w/6" DIA Optical Acrylic Diffuser
Canopy: 10" DIA
LED: 19w, 1155 Lumens (820 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

- 3730.03 Satin White
- 3730.13 Satin Nickel
- 3730.35 Polished Nickel

3731

Oculus 13" LED Surface Mount

2 1/2" H x 13" DIA
Shade: Metal w/9" DIA Optical Acrylic Diffuser
Canopy: 13" DIA
LED: 25w, 1725 Lumens (1225 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

- 3731.03 Satin White
- 3731.13 Satin Nickel
- 3731.35 Polished Nickel

3732

Oculus 16" LED Surface Mount

2 1/2" H x 16" DIA
Shade: Metal w/10 1/2" DIA Optical Acrylic Diffuser
Canopy: 16" DIA
LED: 31w, 1895 Lumens (1345 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

- 3732.03 Satin White
- 3732.13 Satin Nickel
- 3732.35 Polished Nickel



inside out®
For Indoor and Outdoor Locations

Beautifully executed forms of
sculptural presence and simplicity
that are equally at home
inside or out.

7309.XX.FW.72-WL



7309.XX.FW.74-WL



7309.XX.FH.74-WL



7309.XX.DL.74-WL



7309.XX.PL.74-WL

Round Exterior Architectural Lighting System

SURFACE MOUNTS

REALS surface-mounted lights
are neatly compact and solidly
built. They offer a range of lens
variations within the tightly defined
geometry of their die-cast rings.

7309

REALS LED Surface Mount

1 1/2" to 3 1/4" MAX H X 5" DIA
Canopy: 5" DIA
LED: 10w, 1040 Lumens
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

WET LOCATION, ADA

Details and finishes on this item p.96

Round Exterior Architectural Lighting System

reals SCONCES

Consider the possibilities of the nearly unlimited opportunities to configure REALS sconces, with lenses and caps, for a variety of LED illuminating possibilities.

7302

REALS Up/Down LED Sconce

1 1/2" to 5" MAX H X 5" W

Extension: 6 1/2"

Wall Plate: 4 1/2" sq

LED: (2) 20w (total), 2080 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION

Details and finishes on this item p.96

REALS Cap and Lens Options



Plate Cap - PC
Die-Cast Aluminum



Dome Cap - DC
Die-Cast Aluminum



Plate Lens - PL
UV-Stabilized Polycarbonate



Dome Lens - DL
UV-Stabilized Polycarbonate



White Cylinder Lens - FW
UV-Stabilized Polycarbonate



Clear Cylinder Lens - FH
UV-Stabilized Polycarbonate



Plate Cap - PC
Die-Cast Aluminum



LED Fixture Ring
Die-Cast Aluminum



White Cylinder Lens - FW
UV-Stabilized Polycarbonate

Round Exterior Architectural Lighting System



7302.DL.DL.72-WL



7300.DC.DL.72-WL



7302.PL.PL.72-WL



7300.PC.PL.72-WL

reals

SCONCES

7302
REALS Up/Down LED Sconce
 1 1/2" to 5" MAX H x 5" W
 Extension: 6 1/2"
 Wall Plate: 4 1/2" sq
 LED: (2) 20w (total), 2080 Lumens
 Warm White (3000K), 90 CRI
 120VAC Input w/LED Driver in Outlet Box
 Dimmable by Electronic Low Voltage (ELV)
 or Standard (TRIAC) Incandescent
WET LOCATION

Details and finishes on this item p.96

7300
REALS Downlight LED Sconce
 1 1/2" to 5" MAX H x 5" W
 Extension: 6 1/2"
 Wall Plate: 4 1/2" sq
 LED: 10w, 1040 Lumens
 Warm White (3000K), 90 CRI
 120VAC Input w/LED Driver in Outlet Box
 Dimmable by Electronic Low Voltage (ELV)
 or Standard (TRIAC) Incandescent
WET LOCATION

Details and finishes on this item p.96



7300.PC.FW.72-WL



Details and finishes on these items p.96

REALS

Round Exterior Architectural Lighting System

Architectural strength from geometric simplicity; engineered for utility and built for performance. This modular system of precision components allows for dozens of possible configurations and lighting effects, inside or out.



7289.72-WL



7287.74-WL



7289.74-WL

7287

Jazz Notes 21" LED Sconce

21" H x 6" W

Shade: Aluminum w/Optical Acrylic Diffuser

21" H x 6" W x 2 1/2" D

Extension: 3"

Wall Plate: 20" H x 5 1/4" W

LED: 13w, 1300 Lumens (530 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7287.72-WL Textured Bronze

7287.74-WL Textured Gray

7287.98-WL Textured White

7289

Jazz Notes 36" LED Sconce

36" H x 6" W

Shade: Aluminum w/Optical Acrylic Diffuser

36" H x 6" W x 2 1/2" D

Extension: 3"

Wall Plate: 35" H x 5 1/4" W

LED: 20w, 1870 Lumens (900 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7289.72-WL Textured Bronze

7289.74-WL Textured Gray

7289.98-WL Textured White

jazz notes

A welcoming rhythm of thick and thin LED-lit spaces, cut into this crisp-edged aluminum and acrylic rectangular column, brings a dramatic, jazz-like architectural feel to an exterior or interior wall.

band

A crisp-edged rectangular aluminum column delivers bright LED illumination outward from a broad inset acrylic band and downward from a powerful recessed downlight.

7280

Band 8" LED Sconce

8" H x 6" W
Shade: Aluminum w/Optical Acrylic Diffuser
8" H x 6" W x 2 1/2" D
Extension: 3"
Wall Plate: 7" H x 5 1/4" W
LED: 13w, 1300 Lumens (total), 780 Lumens Down (600 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7280.72-WL Textured Bronze
7280.74-WL Textured Gray
7280.98-WL Textured White

7282

Band 13" LED Sconce

13" H x 6" W
Shade: Aluminum w/Optical Acrylic Diffuser
13" H x 6" W x 2 1/2" D
Extension: 3"
Wall Plate: 12" H x 5 1/4" W
LED: 13w, 1300 Lumens (total), 780 Lumens Down (600 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7282.72-WL Textured Bronze
7282.74-WL Textured Gray
7282.98-WL Textured White

7284

Band 21" LED Sconce

21" H x 6" W
Shade: Aluminum w/Optical Acrylic Diffuser
21" H x 6" W x 2 1/2" D
Extension: 3"
Wall Plate: 20" H x 5 1/4" W
LED: 13w, 1300 Lumens (total), 780 Lumens Down (600 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7284.72-WL Textured Bronze
7284.74-WL Textured Gray
7284.98-WL Textured White

box

7340

Box LED Sconce

4 1/2" H x 3 1/2" W
Shade: Diecast Aluminum
4 1/2" H x 3 1/2" W x 2" D
Extension: 2 1/2"
Wall Plate: 4 1/4" H x 3" W
LED: 10w, 1020 Lumens (645 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Non-Dimming

WET LOCATION, ADA

7340.72-WL Textured Bronze
7340.74-WL Textured Gray
7340.98-WL Textured White

triform

COMPACT

7320

Triform Compact LED Sconce

4 1/2" H x 3 1/2" W
Shade: Diecast Aluminum
4 1/2" H x 3 1/2" W x 2" D
Extension: 2 1/2"
Wall Plate: 4 1/4" H x 3" W
LED: 10w, 980 Lumens (385 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Non-Dimming

WET LOCATION, ADA

7320.72-WL Textured Bronze
7320.74-WL Textured Gray
7320.98-WL Textured White

Compact luminaires direct light down from the pure geometry of a rectangular or triangular prism.



7333.72-WL

triform

This cut corner prism extends its form as a triangular column of LED light.

7332

Triform 18" LED Sconce

18" H x 5 1/2" W
Shade: Optical Acrylic
9 3/4" H x 5 1/2" W x 2 3/4" D
Extension: 3 1/2"
Wall Plate: 17 1/4" H x 4 3/4" W
LED: 10W, 1100 Lumens (935 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
WET LOCATION, ADA

- 7332.72-WL Textured Bronze
- 7332.74-WL Textured Gray
- 7332.98-WL Textured White

7333

Triform 24" LED Sconce

24" H x 5 1/2" W
Shade: Optical Acrylic
15 3/4" H x 5 1/2" W x 2 3/4" D
Extension: 3 1/2"
Wall Plate: 23 1/4" H x 4 3/4" W
LED: 14W, 1450 Lumens (1285 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
WET LOCATION, ADA

- 7333.72-WL Textured Bronze
- 7333.74-WL Textured Gray
- 7333.98-WL Textured White

7334

Triform 36" LED Sconce

36" H x 5 1/2" W
Shade: Optical Acrylic
27 3/4" H x 5 1/2" W x 2 3/4" D
Extension: 3 1/2"
Wall Plate: 35 1/4" H x 4 3/4" W
LED: 20W, 2210 Lumens (2065 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
WET LOCATION, ADA

- 7334.72-WL Textured Bronze
- 7334.74-WL Textured Gray
- 7334.98-WL Textured White



7332.98-WL



7333.98-WL



7334.98-WL



7330.74-WL

triform

Triform Panel reflects a subtle glow of LED light on its textured surface.

7330

Triform Panel LED Sconce

13" H x 5 1/2" W

Shade: Diecast Aluminum

13" H x 5 1/2" W x 3" D

Extension: 3 1/2"

Wall Plate: 12 1/4" H x 4 3/4" W

LED: 10w, 935 Lumens (370 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7330.72-WL Textured Bronze

7330.74-WL Textured Gray

7330.98-WL Textured White



7260.98-WL

curved shield

Indirect illumination is projected on the surface of a wall from the single form of a simple curve: the art of modern simplicity.

7260

Curved Shield LED Sconce

11" H x 7" W

Shade: Aluminum

11" H x 7" W x 1 1/2" D

Extension: 3 1/2"

Wall Plate: 4 1/2" sq

LED: 15w, 1050 Lumens (805 Net Lumens)

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7260.72-WL Textured Bronze

7260.74-WL Textured Gray

7260.98-WL Textured White



7275.98-WL



glass glow²

A thick, etched glass panel, suspended in air from a horizontal plane, radiates its LED illumination from within.

7275

Glass Glow² LED Sconce

5 3/4" H x 5" W
Shade: Etched Glass
4 1/2" H x 4 1/4" W x 3/4" D
Extension: 3"
Wall Plate: 5 3/4" H x 5" W
LED: 10w, 900 Lumens (610 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent


WET LOCATION, ADA

7275.72-WL Textured Bronze
7275.74-WL Textured Gray
7275.98-WL Textured White



7275.72-WL

Light from the architectural strength of a solid rectangular column brings modern simplicity inside or out.

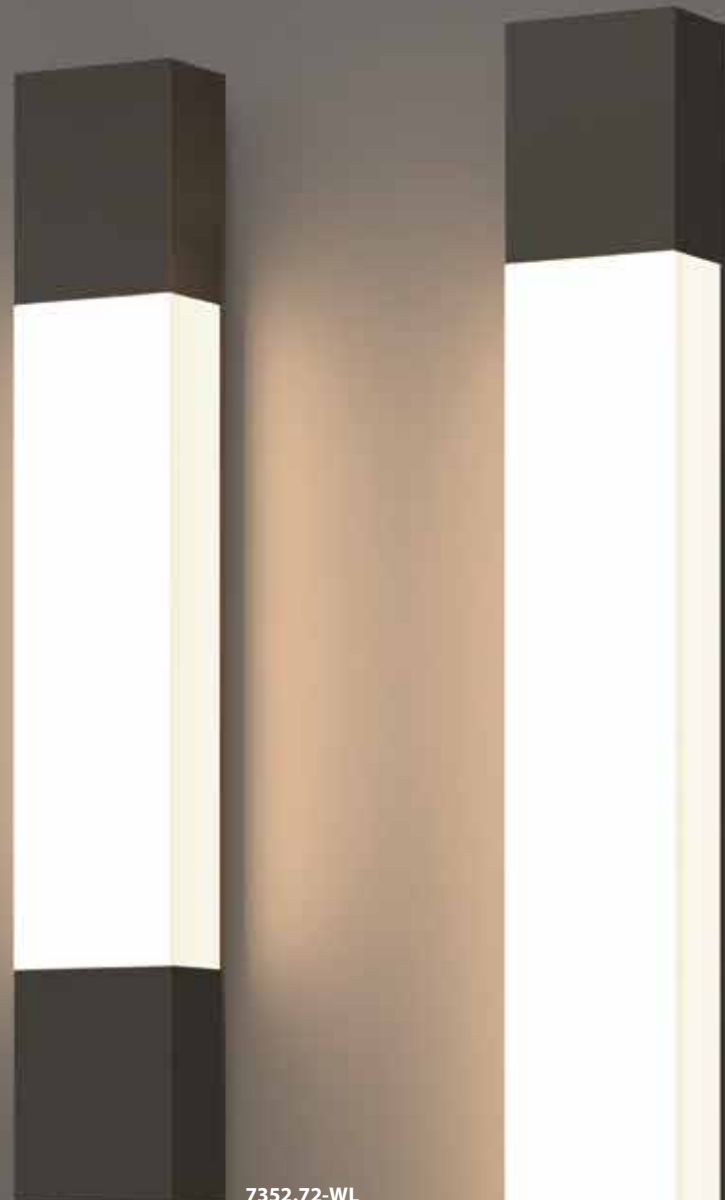

7352.72-WL

box column

7352

Box Column 22" LED Sconce

22" H x 3 1/2" W
Shade: Optical Acrylic
13" H x 3 1/2" W x 2" D
Extension: 2 3/4"
Wall Plate: 21 1/4" H x 2 3/4" W
LED: 15w, 1020 Lumens (935 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

WET LOCATION, ADA

7352.72-WL Textured Bronze
7352.74-WL Textured Gray
7352.98-WL Textured White

7354

Box Column 32" LED Sconce

32" H x 3 1/2" W
Shade: Optical Acrylic
23" H x 3 1/2" W x 2" D
Extension: 2 3/4"
Wall Plate: 31 1/4" H x 2 3/4" W
LED: 26w, 1820 Lumens (1665 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/12VAC Transformer in Outlet Box
Dimmable by Electronic Low Voltage (ELV)

WET LOCATION, ADA

7354.72-WL Textured Bronze
7354.74-WL Textured Gray
7354.98-WL Textured White



7354.72-WL



7267.72-WL

inset

LED light is directed down and reflected out from the inset interior surface of this rectilinear form.

7267

Inset Tall LED Sconce

20" H x 8" W
Shade: Aluminum
20" H x 8" W x 2" D
Extension: 2 1/2"
Wall Plate: 19" H x 7" W
LED: 16w, 1100 Lumens (840 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7267.72-WL Textured Bronze
7267.74-WL Textured Gray
7267.98-WL Textured White



7266.98-WL



7264.72-WL

7266

Inset Short LED Sconce

11" H x 8" W
Shade: Aluminum
11" H x 8" W x 2" D
Extension: 2 1/2"
Wall Plate: 10" H x 7" W
LED: 16w, 1100 Lumens (840 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent

WET LOCATION, ADA

7266.72-WL Textured Bronze
7266.74-WL Textured Gray
7266.98-WL Textured White

7264

Reveal Short LED Sconce

11 3/4" H x 8" W
Shade: Aluminum
9 1/4" H x 4 1/2" W x 1 1/4" D
Extension: 1 3/4"
Wall Plate: 10 3/4" H x 7" W
LED: 21w, 1335 Lumens (560 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer
Dimmable by Electronic Low Voltage (ELV)

WET LOCATION, ADA

7264.72-WL Textured Bronze
7264.74-WL Textured Gray
7264.98-WL Textured White



7265.74-WL

reveal

An illuminated perimeter is revealed between the layered planes of this LED luminaire, casting light indirectly on three of its textured sides.


7265

Reveal Tall LED Sconce

19" H x 8" W
Shade: Aluminum
15 3/4" H x 4 1/2" W x 1 1/4" D
Extension: 1 3/4"
Wall Plate: 18" H x 7" W
LED: 27w, 1700 Lumens (850 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/24VAC Transformer
Dimmable by Electronic Low Voltage (ELV)

WET LOCATION, ADA

7265.72-WL Textured Bronze
7265.74-WL Textured Gray
7265.98-WL Textured White

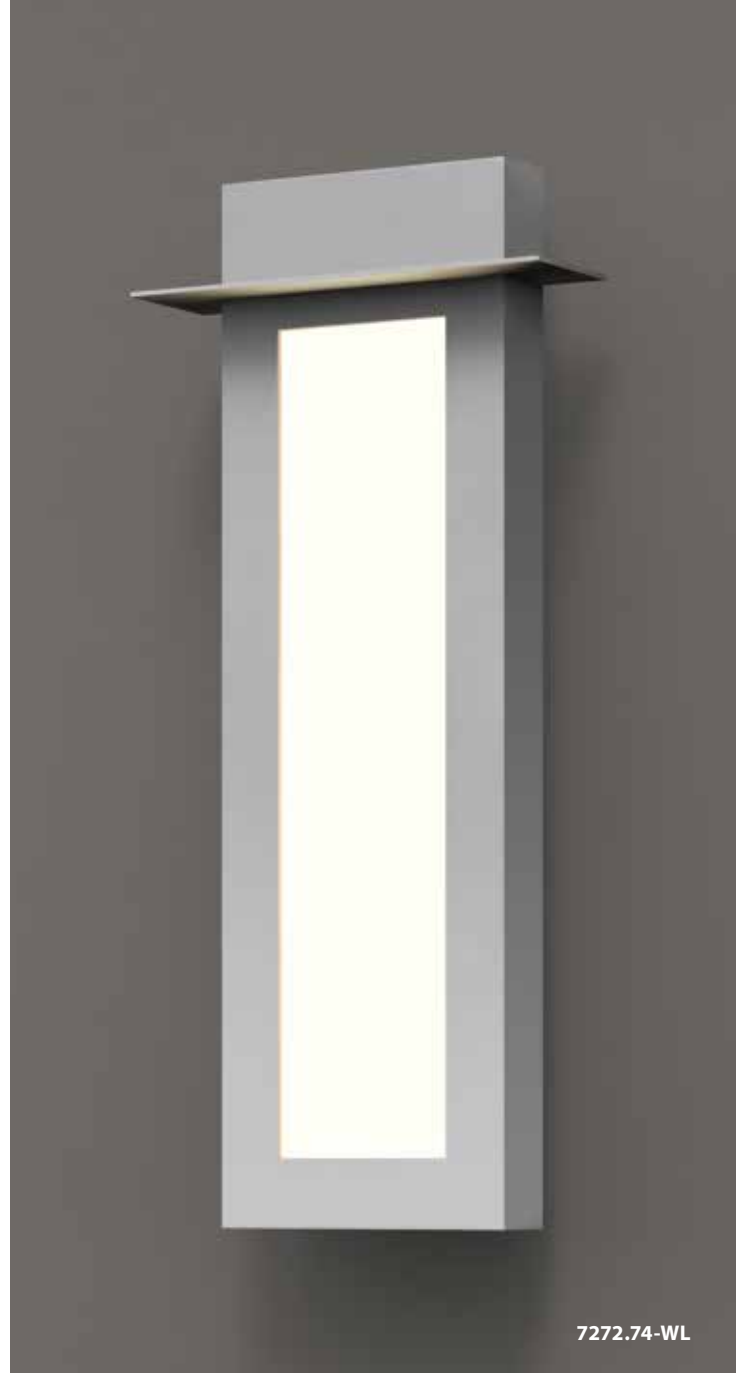

prairie

7270

Prairie 18" LED Sconce

18" H x 11 1/2" W
Shade: Aluminum w/Optical Acrylic Diffuser
18" H x 8" W x 2" D
Extension: 4"
Wall Plate: 17" H x 7" W
LED: 8w, 840 Lumens (460 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
WET LOCATION, ADA

- 7270.72-WL Textured Bronze
- 7270.74-WL Textured Gray
- 7270.98-WL Textured White

7272

Prairie 26" LED Sconce

26" H x 11 1/2" W
Shade: Aluminum w/Optical Acrylic Diffuser
26" H x 8" W x 2" D
Extension: 4"
Wall Plate: 25" H x 7" W
LED: 13w, 1320 Lumens (890 Net Lumens)
Warm White (3000K), 90 CRI
120VAC Input w/LED Driver in Outlet Box
Dimmable by Electronic Low Voltage (ELV)
or Standard (TRIAC) Incandescent
WET LOCATION, ADA


- 7272.72-WL Textured Bronze
- 7272.74-WL Textured Gray
- 7272.98-WL Textured White

A Prairie-style gesture within this contemporary form is a nod to the functionalism of early modernism. The illuminated acrylic panel is perfectly framed within the solid rectilinear column.



bollards


Bring definition and architectural interest to outdoor sites and along paths or planted beds, with bollards of perfect solid geometry and LED lighting functionality.

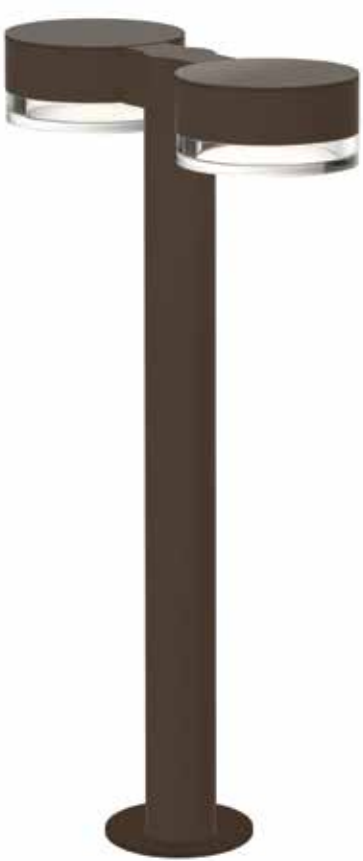

7307.PC.FH.72-WL



7304.PC.FH.72-WL

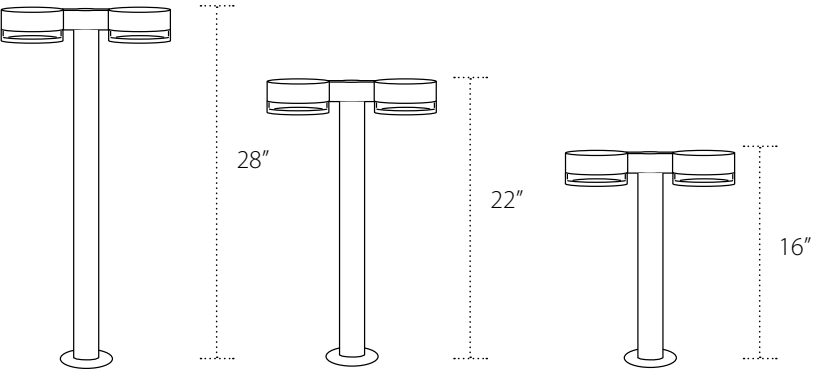

Available in three heights.

7304.DC.DL.74-WL

12VAC Power supply required, sold separately.
Consult Website for requirements and available options.

REALS Bollards offer a broad range of configurations, with many available options for lenses, caps, and heights for a variety of LED illuminating possibilities.



7303
REALS 16" LED Bollard
16" to 17 ¾" MAX H x 5" W x 7 ¾" D
Base: ¼" H x 4" DIA
LED: 10w, 1040 Lumens
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
Details and finishes on this item p.97

7304
REALS 22" LED Bollard
22" to 23 ¾" MAX H x 5" W x 7 ¾" D
Base: ¼" H x 4" DIA
LED: 10w, 1040 Lumens
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
Details and finishes on this item p.97

7305
REALS 28" LED Bollard
28" to 29 ¾" MAX H x 5" W x 7 ¾" D
Base: ¼" H x 4" DIA
LED: 10w, 1040 Lumens
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
Details and finishes on this item p.97

7306
REALS 16" LED Double Bollard
16" to 17 ¾" MAX H x 5" W x 13 ½" D
Base: ¼" H x 4" DIA
LED (2): 20w (total), 2080 Lumens
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
Details and finishes on this item p.97

7307
REALS 22" LED Double Bollard
22" to 23 ¾" MAX H x 5" W x 13 ½" D
Base: ¼" H x 4" DIA
LED (2): 20w (total), 2080 Lumens
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
Details and finishes on this item p.97

7308
REALS 28" LED Double Bollard
28" to 29 ¾" MAX H x 5" W x 13 ½" D
Base: ¼" H x 4" DIA
LED (2): 20w (total), 2080 Lumens
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
Details and finishes on this item p.97

12VAC Power supply required, sold separately.
Consult Website for requirements and available options.

12VAC Power supply required, sold separately.
Consult Website for requirements and available options.

Geometric solids, in unity with rectilinear columns, form single-sided and double-sided LED illuminated bollards that compose the dramatic impact of crisp simplicity.



7321
Triform Compact 16" LED Bollard
16" H x 3 1/2" W x 3 1/4" D

7322
Triform Compact 22" LED Bollard
22" H x 3 1/2" W x 3 1/4" D

7323
Triform Compact 28" LED Bollard
28" H x 3 1/2" W x 3 1/4" D
Shade: Diecast Aluminum
4 1/2" H x 3 1/2" W x 2" D
Base: 1/4" H x 5 1/2" W x 3 1/4" D
LED: 10w, 980 Lumens (385 Net Lumens)
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
7321.72-WL Textured Bronze
7321.74-WL Textured Gray
7322.72-WL Textured Bronze
7322.74-WL Textured Gray
7323.72-WL Textured Bronze
7323.74-WL Textured Gray

7311
Shear 16" LED Bollard
16" H x 3 1/2" W x 4 1/4" D

7312
Shear 22" LED Bollard
22" H x 3 1/2" W x 4 1/4" D

7313
Shear 28" LED Bollard
28" H x 3 1/2" W x 4 1/4" D
Shade: Diecast Aluminum
4 3/4" H x 3 1/2" W x 3" D
Base: 1/4" H x 5 1/2" W x 3 1/4" D
Bulb: (1) 9w, GU5.3 Base LED MR16
12VAC Input
Non-Dimming
WET LOCATION
7311.72-WL Textured Bronze
7311.74-WL Textured Gray
7312.72-WL Textured Bronze
7312.74-WL Textured Gray
7313.72-WL Textured Bronze
7313.74-WL Textured Gray

7341
Box 16" LED Bollard
16" H x 3 1/2" W x 3 1/4" D

7342
Box 22" LED Bollard
22" H x 3 1/2" W x 3 1/4" D

7343
Box 28" LED Bollard
28" H x 3 1/2" W x 3 1/4" D
Shade: Diecast Aluminum
4 1/2" H x 3 1/2" W x 2" D
Base: 1/4" H x 5 1/2" W x 3 1/4" D
LED: 10w, 1020 Lumens (645 Net Lumens)
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
7341.72-WL Textured Bronze
7341.74-WL Textured Gray
7342.72-WL Textured Bronze
7342.74-WL Textured Gray
7343.72-WL Textured Bronze
7343.74-WL Textured Gray

7325
Triform Compact 16" LED Double Bollard
16" H x 3 1/2" W x 5 1/4" D

7326
Triform Compact 22" LED Double Bollard
22" H x 3 1/2" W x 5 1/4" D

7327
Triform Compact 28" LED Double Bollard
28" H x 3 1/2" W x 5 1/4" D
Shade: Diecast Aluminum
4 1/2" H x 3 1/2" W x 2" D
Base: 1/4" H x 5 1/2" W x 3 1/4" D
LED: (2) 20w (total), 1900 Lumens (745 Net Lumens)
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
7325.72-WL Textured Bronze
7325.74-WL Textured Gray
7326.72-WL Textured Bronze
7326.74-WL Textured Gray
7327.72-WL Textured Bronze
7327.74-WL Textured Gray

7315
Shear 16" LED Double Bollard
16" H x 3 1/2" W x 7 1/4" D

7316
Shear 22" LED Double Bollard
22" H x 3 1/2" W x 7 1/4" D

7317
Shear 28" LED Double Bollard
28" H x 3 1/2" W x 7 1/4" D
Shade: Diecast Aluminum
4 3/4" H x 3 1/2" W x 3" D
Base: 1/4" H x 5 1/2" W x 3 1/4" D
Bulb: (2) 9w, GU5.3 Base LED MR16
12VAC Input
Non-Dimming
WET LOCATION
7315.72-WL Textured Bronze
7315.74-WL Textured Gray
7316.72-WL Textured Bronze
7316.74-WL Textured Gray
7317.72-WL Textured Bronze
7317.74-WL Textured Gray

7345
Box 16" LED Double Bollard
16" H x 3 1/2" W x 5 1/4" D

7346
Box 22" LED Double Bollard
22" H x 3 1/2" W x 5 1/4" D

7347
Box 28" LED Double Bollard
28" H x 3 1/2" W x 5 1/4" D
Shade: Diecast Aluminum
4 1/2" H x 3 1/2" W x 2" D
Base: 1/4" H x 5 1/2" W x 3 1/4" D
LED: (2) 20w (total), 2000 Lumens (1265 Net Lumens)
Warm White (3000K), 90 CRI
12VAC Input
Non-Dimming
WET LOCATION
7345.72-WL Textured Bronze
7345.74-WL Textured Gray
7346.72-WL Textured Bronze
7346.74-WL Textured Gray
7347.72-WL Textured Bronze
7347.74-WL Textured Gray

REALS SCHEDULE OF CONFIGURATIONS: sconces & surface mount

DOWNLIGHT LED SCONCE	Upper Cap/Lens			SURFACE MOUNT		
Bottom Lens	Textured Bronze	Dome Cap	Plate Cap	Bottom Lens	Textured Bronze	
	Dome Lens	7300.DC.DL.72-WL	7300.PC.DL.72-WL		Dome Lens	7309.XX.DL.72-WL
	Clear Cylinder Lens	7300.DC.FH.72-WL	7300.PC.FH.72-WL		Clear Cylinder Lens	7309.XX.FH.72-WL
	White Cylinder Lens	7300.DC.FW.72-WL	7300.PC.FW.72-WL		White Cylinder Lens	7309.XX.FW.72-WL
	Plate Lens	7300.DC.PL.72-WL	7300.PC.PL.72-WL		Plate Lens	7309.XX.PL.72-WL
	Textured Gray	Dome Cap	Plate Cap		Textured Gray	
	Dome Lens	7300.DC.DL.74-WL	7300.PC.DL.74-WL		Dome Lens	7309.XX.DL.74-WL
	Clear Cylinder Lens	7300.DC.FH.74-WL	7300.PC.FH.74-WL		Clear Cylinder Lens	7309.XX.FH.74-WL
	White Cylinder Lens	7300.DC.FW.74-WL	7300.PC.FW.74-WL		White Cylinder Lens	7309.XX.FW.74-WL
	Plate Lens	7300.DC.PL.74-WL	7300.PC.PL.74-WL		Plate Lens	7309.XX.PL.74-WL
	Textured White	Dome Cap	Plate Cap		Textured White	
	Dome Lens	7300.DC.DL.98-WL	7300.PC.DL.98-WL		Dome Lens	7309.XX.DL.98-WL
	Clear Cylinder Lens	7300.DC.FH.98-WL	7300.PC.FH.98-WL		Clear Cylinder Lens	7309.XX.FH.98-WL
	White Cylinder Lens	7300.DC.FW.98-WL	7300.PC.FW.98-WL		White Cylinder Lens	7309.XX.FW.98-WL
	Plate Lens	7300.DC.PL.98-WL	7300.PC.PL.98-WL		Plate Lens	7309.XX.PL.98-WL
UP/DOWN LED SCONCE	Upper Cap/Lens					
Bottom Lens	Textured Bronze	Dome Lens	Clear Cylinder Lens	White Cylinder Lens	Plate Lens	
	Dome Lens	7302.DL.DL.72-WL	7302.FH.DL.72-WL	7302.FW.DL.72-WL	7302.PL.DL.72-WL	
	Clear Cylinder Lens	7302.DL.FL.72-WL	7302.FH.FH.72-WL	7302.FW.FH.72-WL	7302.PL.FL.72-WL	
	White Cylinder Lens	7302.DL.FL.72-WL	7302.FH.FW.72-WL	7302.FW.FW.72-WL	7302.PL.FL.72-WL	
	Plate Lens	7302.DL.PL.72-WL	7302.FH.PL.72-WL	7302.FW.PL.72-WL	7302.PL.PL.72-WL	
	Textured Gray	Dome Lens	Clear Cylinder Lens	White Cylinder Lens	Plate Lens	
	Dome Lens	7302.DL.DL.74-WL	7302.FH.DL.74-WL	7302.FW.DL.74-WL	7302.PL.DL.74-WL	
	Clear Cylinder Lens	7302.DL.FH.74-WL	7302.FH.FH.74-WL	7302.FW.FH.74-WL	7302.PL.FH.74-WL	
	White Cylinder Lens	7302.DL.FW.74-WL	7302.FH.FW.74-WL	7302.FW.FW.74-WL	7302.PL.FW.74-WL	
	Plate Lens	7302.DL.PL.74-WL	7302.FH.PL.74-WL	7302.FW.PL.74-WL	7302.PL.PL.74-WL	
	Textured White	Dome Lens	Clear Cylinder Lens	White Cylinder Lens	Plate Lens	
	Dome Lens	7302.DL.DL.98-WL	7302.FH.DL.98-WL	7302.FW.DL.98-WL	7302.PL.DL.98-WL	
	Clear Cylinder Lens	7302.DL.FH.98-WL	7302.FH.FH.98-WL	7302.FW.FH.98-WL	7302.PL.FH.98-WL	
	White Cylinder Lens	7302.DL.FW.98-WL	7302.FH.FW.98-WL	7302.FW.FW.98-WL	7302.PL.FW.98-WL	
	Plate Lens	7302.DL.PL.98-WL	7302.FH.PL.98-WL	7302.FW.PL.98-WL	7302.PL.PL.98-WL	

REALS SCHEDULE OF CONFIGURATIONS: bollards

Bottom Lens	16" BOLLARD	Upper Cap			16" DOUBLE BOLLARD	Upper Cap		
	Textured Bronze	Dome Cap	Plate Cap		Textured Bronze	Dome Cap	Plate Cap	
	Dome Lens	7303.DC.DL.72-WL	7303.PC.DL.72-WL		Dome Lens	7306.DC.DL.72-WL	7306.PC.DL.72-WL	
	Clear Cylinder Lens	7303.DC.FH.72-WL	7303.PC.FH.72-WL		Clear Cylinder Lens	7306.DC.FH.72-WL	7306.PC.FH.72-WL	
	White Cylinder Lens	7303.DC.FW.72-WL	7303.PC.FW.72-WL		White Cylinder Lens	7306.DC.FW.72-WL	7306.PC.FW.72-WL	
	Plate Lens	7303.DC.PL.72-WL	7303.PC.PL.72-WL		Plate Lens	7306.DC.PL.72-WL	7306.PC.PL.72-WL	
	Textured Gray	Dome Cap	Plate Cap		Textured Gray	Dome Cap	Plate Cap	
	Dome Lens	7303.DC.DL.74-WL	7303.PC.DL.74-WL		Dome Lens	7306.DC.DL.74-WL	7306.PC.DL.74-WL	
	Clear Cylinder Lens	7303.DC.FH.74-WL	7303.PC.FH.74-WL		Clear Cylinder Lens	7306.DC.FH.74-WL	7306.PC.FH.74-WL	
	White Cylinder Lens	7303.DC.FW.74-WL	7303.PC.FW.74-WL		White Cylinder Lens	7306.DC.FW.74-WL	7306.PC.FW.74-WL	
	Plate Lens	7303.DC.PL.74-WL	7303.PC.PL.74-WL		Plate Lens	7306.DC.PL.74-WL	7306.PC.PL.74-WL	
Bottom Lens	22" BOLLARD	Upper Cap			22" DOUBLE BOLLARD	Upper Cap		
	Textured Bronze	Dome Cap	Plate Cap		Textured Bronze	Dome Cap	Plate Cap	
	Dome Lens	7304.DC.DL.72-WL	7304.PC.DL.72-WL		Dome Lens	7307.DC.DL.72-WL	7307.PC.DL.72-WL	
	Clear Cylinder Lens	7304.DC.FH.72-WL	7304.PC.FH.72-WL		Clear Cylinder Lens	7307.DC.FH.72-WL	7307.PC.FH.72-WL	
	White Cylinder Lens	7304.DC.FW.72-WL	7304.PC.FW.72-WL		White Cylinder Lens	7307.DC.FW.72-WL	7307.PC.FW.72-WL	
	Plate Lens	7304.DC.PL.72-WL	7304.PC.PL.72-WL		Plate Lens	7307.DC.PL.72-WL	7307.PC.PL.72-WL	
	Textured Gray	Dome Cap	Plate Cap		Textured Gray	Dome Cap	Plate Cap	
	Dome Lens	7304.DC.DL.74-WL	7304.PC.DL.74-WL		Dome Lens	7307.DC.DL.74-WL	7307.PC.DL.74-WL	
	Clear Cylinder Lens	7304.DC.FH.74-WL	7304.PC.FH.74-WL		Clear Cylinder Lens	7307.DC.FH.74-WL	7307.PC.FH.74-WL	
	White Cylinder Lens	7304.DC.FW.74-WL	7304.PC.FW.74-WL		White Cylinder Lens	7307.DC.FW.74-WL	7307.PC.FW.74-WL	
	Plate Lens	7304.DC.PL.74-WL	7304.PC.PL.74-WL		Plate Lens	7307.DC.PL.74-WL	7307.PC.PL.74-WL	
Bottom Lens	28" BOLLARD	Upper Cap			28" DOUBLE BOLLARD	Upper Cap		
	Textured Bronze	Dome Cap	Plate Cap		Textured Bronze	Dome Cap	Plate Cap	
	Dome Lens	7305.DC.DL.72-WL	7305.PC.DL.72-WL		Dome Lens	7308.DC.DL.72-WL	7308.PC.DL.72-WL	
	Clear Cylinder Lens	7305.DC.FH.72-WL	7305.PC.FH.72-WL		Clear Cylinder Lens	7308.DC.FH.72-WL	7308.PC.FH.72-WL	
	White Cylinder Lens	7305.DC.FW.72-WL	7305.PC.FW.72-WL		White Cylinder Lens	7308.DC.FW.72-WL	7308.PC.FW.72-WL	
	Plate Lens	7305.DC.PL.72-WL	7305.PC.PL.72-WL		Plate Lens	7308.DC.PL.72-WL	7308.PC.PL.72-WL	
	Textured Gray	Dome Cap	Plate Cap		Textured Gray	Dome Cap	Plate Cap	
	Dome Lens	7305.DC.DL.74-WL	7305.PC.DL.74-WL		Dome Lens	7308.DC.DL.74-WL	7308.PC.DL.74-WL	
	Clear Cylinder Lens	7305.DC.FH.74-WL	7305.PC.FH.74-WL		Clear Cylinder Lens	7308.DC.FH.74-WL	7308.PC.FH.74-WL	
	White Cylinder Lens	7305.DC.FW.74-WL	7305.PC.FW.74-WL		White Cylinder Lens	7308.DC.FW.74-WL	7308.PC.FW.74-WL	
	Plate Lens	7305.DC.PL.74-WL	7305.PC.PL.74-WL		Plate Lens	7308.DC.PL.74-WL	7308.PC.PL.74-WL	

12VAC Power supply required, sold separately. Consult Website for requirements and available options.

INDEX: By Product Image



infinity reflections 4



infinity 10



waveforms™ 14



abstract rhythms 22



abstract panels 28



lotus 30



float 33



light guide ring 36




cantina 42




liquid 46



champagne bubbles 54




fontanna 58



fontanna shields 60



solid glass bar 62



bath notes 64



oculus 66




reals 68




jazz notes 76



band 78




box 79



triform compact 79



triform 80



curved shield 83



glass glow² 84



box column 85



inset 86



reveal 87



prairie 88



reals bollards 90



triform compact bollards 94



shear bollards 94



box bollards 94

INDEX: By Item Family

A		F		L		S	
abstract panels	28	float	33	light guide ring	36	shear bollards	94
abstract rhythms	22	fontanna	58	liquid	46	solid glass bar	62
B		fontanna shield	60	lotus	30	T	
band	78	G		O		triform	80
bath notes	64	glass glow ²	84	oculus	66	triform compact bollards	94
box	79	I		P		triform compact	79
box bollards	94	infinity	10	prairie	88	W	
box column	85	infinity reflections	4	R		waveforms™	14
C		inset	86	reals	68		
cantina	42	J		reals bollards	90		
champagne bubbles	54	jazz notes	76	reveal	87		
curved shield	83						

INDEX: By Item Number

2590	62	2670	21	2990-SML	44	7307	93
2592	62	2671	21	2995-LRG	43	7308	93
2594	63	2673	18	2995-MED	43	7309	69
2610	64	2674	18	2995-SML	43	7311	94
2611	64	2675	17	2996	43	7312	94
2612	64	2676	17	2997	43	7313	94
2613	65	2690	29	3730	67	7315	95
2620	35	2692	29	3731	67	7316	95
2622	34	2694	29	3732	67	7317	95
2630	61	2695	23	7260	83	7320	79
2632	59	2696	25	7264	87	7321	94
2640	32	2697	27	7265	87	7322	94
2643	31	2961	56	7266	87	7323	94
2645	31	2962	56	7267	86	7325	95
2650	41	2963	56	7270	89	7326	95
2651	41	2964	57	7272	89	7327	95
2652	40	2965	57	7275	84	7330	82
2653	40	2966	57	7280	78	7332	81
2654	38	2970	49	7282	78	7333	81
2655	38	2971	49	7284	78	7334	81
2656	37	2973	46	7287	77	7340	79
2660	13	2975	51	7289	77	7341	94
2662	13	2976	51	7300	72	7342	94
2665	11	2977	51	7302	70	7343	94
2666	11	2980	53	7303	92	7345	95
2667	9	2981	53	7304	92	7346	95
2668	9	2990-LRG	44	7305	92	7347	95
2669	6	2990-MED	44	7306	93	7352	85
						7354	85

ADDITIONS

THREE | 2017



SONNEMAN – A WAY OF LIGHT
P.O. Box 394 Wappingers Falls, New York 12590
P. 845.926.5469 F. 845.565.8930

e-mail: csr@sonnemanawayoflight.com
www.sonnemanawayoflight.com



Copyright ©2017 SONNEMAN – A WAY OF LIGHT

SONNEMAN®

A WAY OF LIGHT