

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Stack 48" Pendant 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-29803 3 Light	3000K 90	42W	120-277 VAC	4938	3950	AL Brushed Aluminum BK Black

Example: **PD-29803-AL**

DESCRIPTION

A chandelier that is designed to your tastefully simply adjust the hanging height and slope of any stem exactly how you want to express your artistry. Thin powered suspension wires ensure a clean look no matter how you hang it.

FEATURES

- Height and slope of each pendant strip can be individually adjusted for personalized creative display
- Thin color matched powered aircraft cables and hardware
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body with extruded acrylic diffuser



FINISHES



LINE DRAWING



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Stack 48" Pendant 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-29806 6 Light	3000K 90	84W	120-277 VAC	9876	7900	AL Brushed Aluminum BK Black

Example: **PD-29806-AL**

DESCRIPTION

A chandelier that is designed to your tastefully simply adjust the hanging height and slope of any stem exactly how you want to express your artistry. Thin powered suspension wires ensure a clean look no matter how you hang it.

FEATURES

- Height and slope of each pendant strip can be individually adjusted for personalized creative display
- Thin color matched powered aircraft cables and hardware
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body with extruded acrylic diffuser



FINISHES



LINE DRAWING



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Stack 48" Pendant 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-29809 9 Light	3000K 90	126W	120-277 VAC	14814	11850	AL Brushed Aluminum BK Black

Example: **PD-29809-AL**

DESCRIPTION


A chandelier that is designed to your tastefully simply adjust the hanging height and slope of any stem exactly how you want to express your artistry. Thin powered suspension wires ensure a clean look no matter how you hang it.

FEATURES

- Height and slope of each pendant strip can be individually adjusted for personalized creative display
- Thin color matched powered aircraft cables and hardware
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body with extruded acrylic diffuser

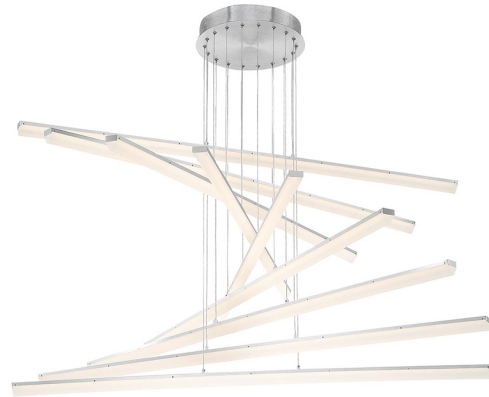

FINISHES



LINE DRAWING

