

SIREN Wall Sconce

120v : **3-563-xxx**

277v : **37-563-xxx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-14 Polished Chrome



-24 Satin Nickel

Diffusers:




-1 White Opal Glass



-2 Matte White Acrylic



-4 Faux Onyx Acrylic



-6 Silver Cloth Acrylic

LIGHT SOURCE 1 x 10.1W LED, 3000K, CRI 90

LUMINAIRE POWER 13.2W (at 120V)

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: (-1) Glass: 980 lm (LM-79)
 (-2) Acrylic: 1006 lm (LM-79)
 (-4) Acrylic: 747 lm (LM-79)
 (-6) Acrylic: 604 lm (LM-79)



INPUT VOLTAGE 120V or 277V

DRIVER OUTPUT 350mA, 12W

DIMMING 0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming

CONSTRUCTION Plated Steel and Acrylic

DIFFUSER / METAL FINISHES
 (-114) White Opal Glass / Polished Chrome
 (-124) White Opal Glass / Satin Nickel
 (-214) Matte White Acrylic / Polished Chrome
 (-224) Matte White Acrylic / Satin Nickel
 (-414) Faux Onyx Acrylic / Polished Chrome
 (-424) Faux Onyx Acrylic / Satin Nickel
 (-614) Silver Cloth Acrylic / Polished Chrome
 (-624) Silver Cloth Acrylic / Satin Nickel

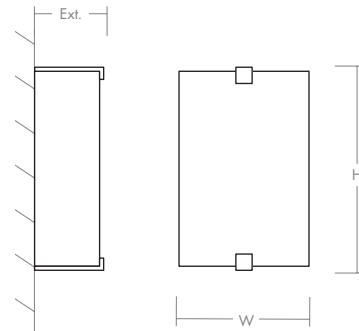

DIMENSIONS

W: 7.91"

H: 12.50"

Ext: 4.00"

M.C: 6.30" From top of fixture

MOUNTING 4" Octagonal J-Box

STANDARDS ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

Order example for standard fixture:

3-563-124 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-563-27124**

27: 2700K, 35: 3500K, 40: 4000K

