




# Assembly Instructions: 1017-3+9


## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

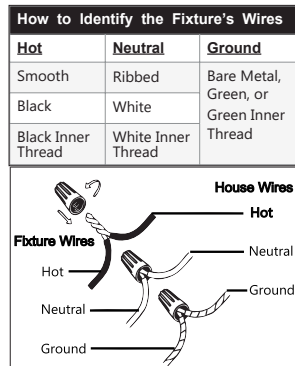

**DO NOT OPEN CHAINS OR CUT WIRES UNTIL YOU ARE SURE OF YOUR FIXTURE'S OVERALL HANGING HEIGHT**

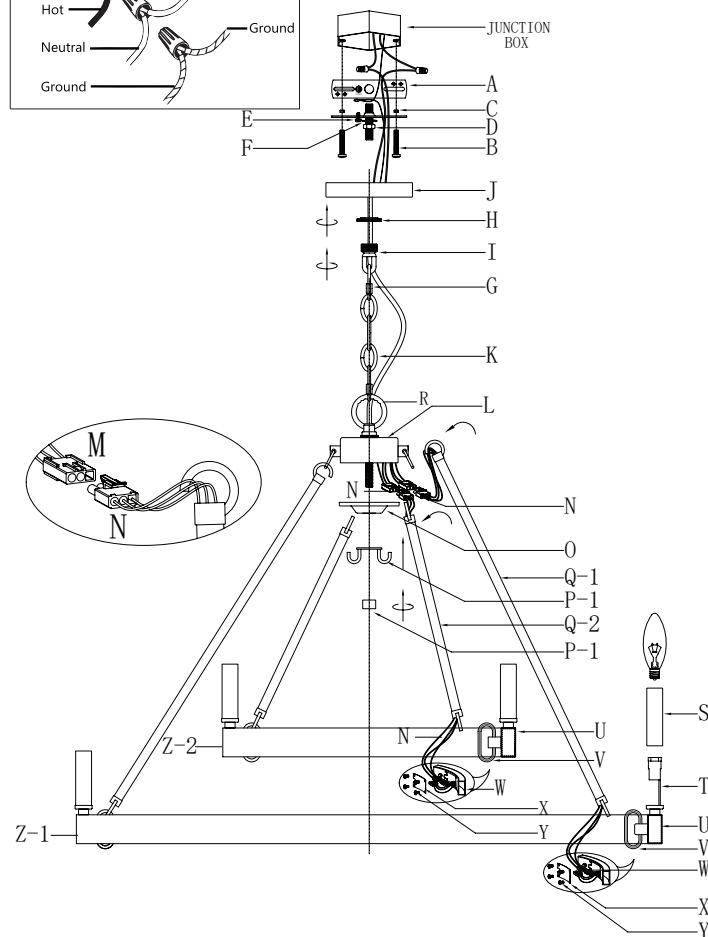

## ASSEMBLING THE FIXTURE: CONTINUED...

7. Rest fixture ring (Z-2) on the ground. Attach short rods (Q-2) to rings (V) found on fixture ring (Z-2). Set aside for later installation.

## CONNECTING THE WIRES

8. Have two assistants available to support the fixture weight of rings (Z-1 & Z-2) while completing the entire wiring process. Using a screwdriver, unscrew screws (Y) from panels (X) found within plates (U) on fixture rings (Z-1 & Z-2). Inside panels (X), you will find wire connectors (W). Push wire connectors (W) into wire connectors (N) found on one of the rods (Q-1 & Q-2) until you hear a click. You may need to rearrange rods to ensure wire connectors are near one another for easy wiring connection.

9. Tuck the connected wires on fixture rings (Z-1 & Z-2) back into panels (X) and use screws (Y) and a screwdriver to secure wires back into the panels (X). The long rod (Q-1) and short rod (Q-2) should still have one open wire connector (N).

10. Untwist finial (P-2) from the fixture's base (L). Once unscrewed, pull hooks (P-1) and cup (O) off of the exposed nipple from the bottom of fixture base (L) to expose wire connectors (M). Lift fixture ring (Z-2) and short rods (Q-2) up to the bottom of the fixture. Take the wire connector (N) from one of the long rods (Q-1) and from the short rod (Q-2) and push into wire connectors (M) until you hear a click. Tuck the connected wires beneath the fixture base (L) and push hooks (P-1) and cup (O) over the nipple, making sure the connected wires are secured within the cup (O). Secure hooks (P-1) and cup (O) with connected wires (M & N) inside to the fixture base (L) using finial (P-2). Twist finial (P-2) onto the nipple until secure. Attach the tops of short rods (Q-2) to the hooks (P-1) near the finial (P-2).

11. Attach the fixture's wires to the house wires which were pulled earlier from the junction box through the mounting strap (A). Connect black to black (transparent wire with black inner thread or smooth); white to white (transparent wire with white inner thread or ribbed); ground to ground (green, transparent wire with green inner thread, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) coming from the junction box, locate ground screw (E) on the mounting strap and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

## FINISHING THE INSTALLATION

12. Push canopy (J) up to the ceiling and slide canopy loop collar (H) up beneath the canopy. Tightly thread canopy loop collar (H) onto canopy loop (I) to secure canopy (J) in place.

13. Push candle sleeves (S) onto sockets (T).

Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture. For deep cleaning, turn off the light and remove the glass prior to cleaning. Hand wash glass with warm water and mild detergent. Dry with a lint-free or microfiber cloth.