


# UCL3216WH

CRI 90 2700K 1200 Lumens LED 32" Length Undercabinet light

Elitco Lighting



The new 3-in-one modular dimmable LED undercabinet fixture with switchable color temperatures, a low profile housing and glare-free acrylic lens.

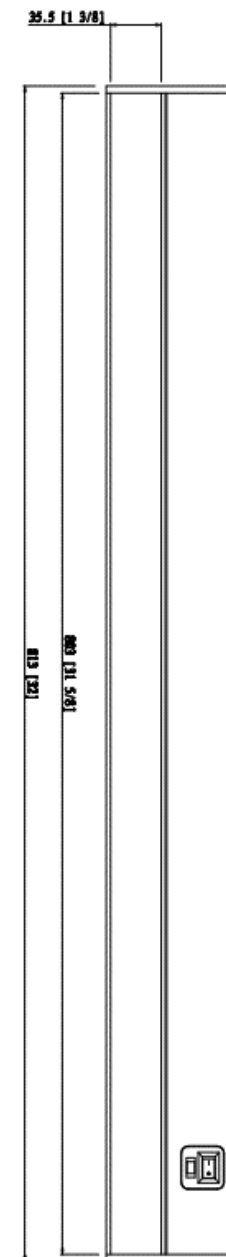

## Performance

- Dimmable with most standard 2-wire and CL dimmers with 5-100% light output (minimum loads will apply)
- Micro switch on housing can be set to 2700K, 3000K or 4000K CCT (correlated color temperature)
- High CRI (90+) for all CCTs
- Low profile housing hides easily - less than 1" high
- SMD 5630 LEDs offer long 35,000 hours rated life

## Construction


- Full length acrylic lens diffuses light evenly over the work area
- Multiple connection points hold PC board firmly against heat sink, optimizing heat dissipation and extending LED life

## Installation

- Mount to underside of shelf or cabinet, at the leading edge, for best performance
- Modular design with hardwire junction boxes, power cords and linking cables sold separately offers maximum flexibility and optional fixture placement
- Quick access door speeds hardwire installations by eliminating the need to open the wiring compartment
- Captive screws and quick stab wire connectors allow quick mounting and wiring



Title 24  
compliant



## Specifications

Category	Undercabinet Light	Individual Box Weight Per Unit (Lbs)	2.22
Shape	RECTANGULAR	Inner Package Length (Inch)	N/A
Bulb Base Type	INTEGRATED LED	Inner Package Width (Inch)	N/A
Bulb Base Finish	N/A	Inner Package Height (Inch)	N/A
Color Temperature	2700K/3000K/4000K	Inner Package Weight Per Unit (Lbs)	N/A
Beam Angle	106°	Inner Package Quantity	N/A
Finish	White		
CRI	90		
Average Life (Hours)	35000		
Estimated Yearly Energy Cost (11 ¢ /Kwh)	1.93		
Life Based On 3Hrs/Day (Years)	31.96		
Product Length (Inch)	32	Lamp Type	LED
Product Width (Inch)	3.63	Bulb Shape	N/A
Product Height (Inch)	0.94	Dry/Wet/Damp	DAMP
Product Extension (Inch)	N/A	Energy Star	N/A
Product Weight Per Unit (Lbs)	2.14	Power Factor	>0.9
Dimmable	YES	Current	0.13A
Watts	16	Lumen/Watt	75
Watt Equivalent	75	Warranty (Year)	5
Lumens	1200	DLC (Yes/No)	NO
Certification (UL/ETL/FCC)	ETL	Input Voltage	120V
Individual Box Length (Inch)	32.87	Housing Material	Aluminum
Individual Box Width (Inch)	3.94	Lens	PC
Individual Box Height (Inch)	1.38	Led Type	HONGLI