



# MODUS

12V MINI PENDANTS

location:  
**DRY**

## SPECIFICATIONS:

### DESCRIPTION

Low voltage mini pendant with concrete shade.

### LAMPING

**Standard:** 35W Shielded flood 12V halogen MR16 lamp, lamp included.

**LED:** 7W Replaceable 12V LED MR16, dimmable, 82+ CRI, 3000°K CCT, 500 lumens, 25,000 hours. Lamp included.

### DIFFUSER

Shade shall be made of concrete in various finishes. 9" Dia. x 5" H

### CORD

Standard cord is 10' field-adjustable coaxial type with teflon jacket and decorative sleeve at the socketholder. Jacket tint coordinates with metal finish.

### STANDARD PENDANT

Mini pendant comes complete with flat-style canopy.

### METAL FINISH


Hardware and canopies are finished in Bronze or Satin Nickel.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



NATURAL (MODUSNA) & WHITE (MODUSWH)

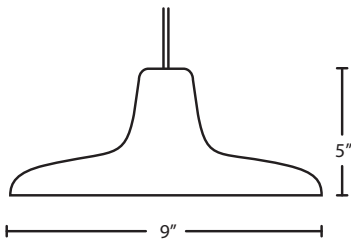

MODUSTN  
TAN

**For ordering information, see next page**

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 3/16**



# MODUS

12V MINI PENDANTS


## ORDERING:

CONNECTION	SHADE OPTIONS	LAMP OPTIONS	METAL FINISH
Pendant Fixtures	<b>MODUSNA</b> Natural	<b>(blank)</b> 35W MR16 Hal	<b>BR</b> Bronze
<b>1XT</b> Flat Canopy	<b>MODUSTN</b> Tan <b>MODUSWH</b> White	<b>LED</b> 7W LED	<b>SN</b> Satin Nickel

**Ex. 1XT-MODUSTN-SN**  
 Modus Pendant, Tan,  
 Satin Nickel Finish

## FIXED PENDANT OPTION:

### 1XT 1 Light Pendant, Flat Canopy



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Bronze or Satin Nickel metal finishes

### 12V LED MR16 TYPE LAMPS:

Design includes thermal fins and construction for heat management and increased LED life.

#### 7W Replacable LED:

- 7W LED lamp
- 500 lumens
- 12V input only
- Rated life: 25,000 hours
- CRI: 82+
- CCT: 3000°K
- Dimmable
- **Item #: B5552**

### Project Information: