

# WAC LIGHTING

## VENTRIX

### Volo Pendants

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model	Size	Watt	Color Temp & CRI	Delivered Lumens	Finish
S2PD05	1	18W	927 2700K - 90	1410	AL Brushed Aluminum BK Black
	1	18W	930 3000K - 90	1480	
	1	18W	935 3500K - 90	1560	
	1	18W	940 4000K - 90	1590	
	2	25W	927 2700K - 90	1840	
	2	25W	930 3000K - 90	1940	
	2	25W	935 3500K - 90	2040	
	2	25W	940 4000K - 90	2070	

Example: **S2PD05-1-927AL**

#### DESCRIPTION

Sleek, linear and minimalist. An extruded aluminum body enables superior light output from evenly diffused LEDs for generous task illumination. Volo balances form and function, used individually or in groups. Field adjustable suspension cables. Dims beautifully.

#### FEATURES


- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Suspension cables may be field shortened
- Driver concealed within the VENTRIX adapter
- To enable access to VENTRIX element releasing tabs, maintain at least 3" of free channel space
- 5 year warranty

#### SPECIFICATIONS


<b>Construction:</b>	Aluminum hardware with polycarbonate diffuser
<b>Power:</b>	18W, 25W
<b>Input:</b>	48 VDC
<b>Dimming:</b>	ELV: 100-0.1% , 0-10V: 100-0.1%, TRIAC: 100-0.1%
<b>Light Source:</b>	Integrated LED 3 Step Mac Adam Ellipse
<b>Lens:</b>	Polycarbonate Diffuser
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	Installs magnetically and mechanically into VENTRIX system
<b>Finish:</b>	Anodized:Brushed Aluminum, Anodized::Black
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL, cUL, Dry Location Listed, Title 24 JA8 Compliant



#### FINISHES:



#### LINE DRAWING:

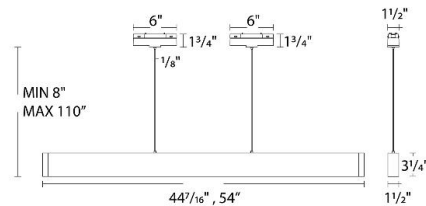

S2PD05-1, S2PD05-2

# WAC LIGHTING

## VENTRIX Volo Pendants

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

---

### ACCESSORIES

---

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	<b>S2PD-HOOK-BK</b> <b>S2PD-HOOK-WT</b>	VENTRIX VENTRIX	Black White