


# INSTALLATION INSTRUCTION OF LIVE END

**Turn electricity off at fuse box or circuit breaker box.**

1. Remove flat head set screw from the back of Live End fitting and use to fasten Ceiling Plate to Live End fitting.
2. Remove cover from Live End fitting. Place track with Ceiling Plate attached to Outlet Box and mark on ceiling or wall the position of the track mounting holes ( **CAUTION** : Arrow mark on Live End fitting should point to polarity groove on track for proper installation after assembly ).
3. Fasten Ceiling Plate to Outlet Box with two screws. Pull wires from Box thru open hole in Live End as shown.
4. Cut ans strip wires from Box and fasten BK house wire to Brass terminal; WH house wire to Nickel-Plated terminal ;Green Ground hosue wire to Green Ground terminal by rotating the screws.
5. Push excess wires back to into Outlet Box and recap the cover by screw.

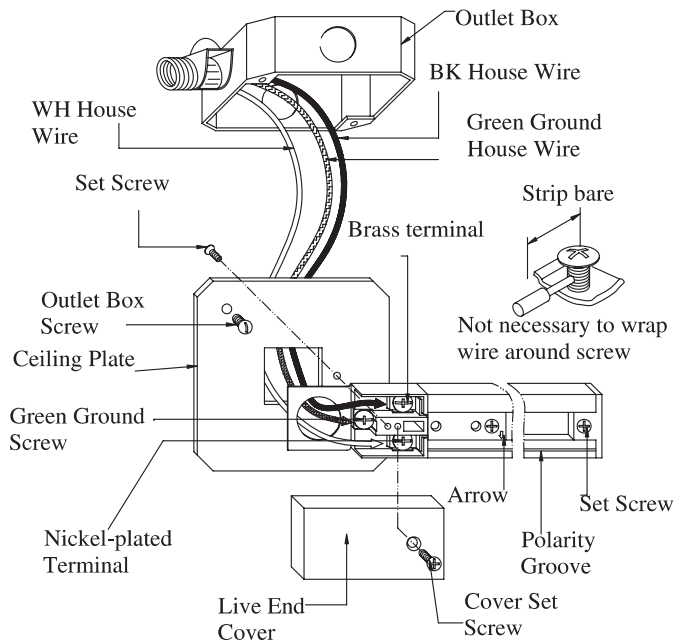

**SAVE THESE INSTRUCTIONS**

**Warning:** To avoid the potential risk of fire and shorting, under any circumstances **should not** you use the connectors and end cap **without** busbar stoppers (Drawings below with "X" mark ) for your track system.

