



# TONDO 18

120V PENDANTS



## SPECIFICATIONS:

### DESCRIPTION

Cord-hung, cable-hung or stem-mount pendant with handcrafted glass diffuser.

### LAMPING

**Standard:** 150W A21 120V incandescent, suitable for dimming, not included.

**CFL:** 26W 4-Pin CFL with non-dimming electronic ballast. 120V, lamp not included.

**GU24 CFL:** Self-ballasted GU24 lampholders. 26W max, 120V, lamp not included.

**LED:** 10W GU24 LED Lamp 120V, dimmable, included.

### DIFFUSER

Shade shall be handcrafted glass of various decors. 6.25" Dia. x 17.75" H (4128HB and 4128MA are 5.75" Dia.)

**Opening sizes:** 3x10mm holes.

### SUSPENSION

**Cord-hung:** 10' SJT-type cord. Jacket coordinates with metal finish. 5" Dia. canopy is stamped steel. Black or white powder-coat.

**Cable-hung:** 1x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket coordinates with metal finish. 5" Dia. dome canopy is plated stamped steel. Bronze or Satin Nickel.

**Stem-mount:** 4 connectable stem sections (3", 6", 12" and 18" lengths), 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.

### MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.


### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

Consult factory concerning lower wattage labeling for energy requirements.



TONDO 18 SHOWN IN BLUE CLOUD (412886) & AMBER CLOUD (412818)

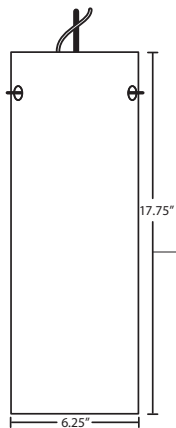

For ordering information, see next page

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14




ORDERING:

CONNECTION	GLASS OPTIONS	LAMP OPTIONS	METAL FINISH	OPTIONS
Cable Fixture <b>1KX</b> 1 Lt. Dome	<b>412807</b> Opal Matte <b>412818</b> Amber Cloud <b>412819</b> Carrera	<b>(blank)</b> 150W A21 Incan <b>H1</b> 26W Quad 120V <b>Q1</b> 26W Quad 277V	Cable/Stem Fixture <b>BR</b> Bronze <b>SN</b> Satin Nickel	<b>L</b> 15' cord <b>LW</b> Low wattage labeling
Stem Fixture <b>1TT</b> 1 Lt. Flat	<b>412880</b> Amber Matte <b>412886</b> Blue Cloud <b>4128CE</b> Ceylon	<b>GU24</b> 26W GU24 120V <b>LED</b> 10W LED 120V, dimmable	Cord Fixture <b>BK</b> Black (Black cord) <b>WH</b> White (White cord)	
Cord Fixture <b>1VC</b> 1 Lt. Dome <b>1VT</b> 1 Lt. Flat	<b>4128HB</b> Habanero <b>4128MA</b> Magma <b>4128VM</b> Vanilla Matte			

Ex. **1VC-4128MA-WH**  
Tondo 18 Pendant w/ Magma Glass, White Finish


PENDANT OPTIONS:

CORD-HUNG PENDANTS




- Flat or Dome Canopy styles. Dome style allows adjustment without cutting cord.
- Suitable for sloped ceilings
- Cord: 10' SJT, 5" sleeve at socketholder
- Black or White finish

CABLE-HUNG PENDANT



- 1x 10' aircraft-quality stainless steel cable
- Suitable for sloped ceilings
- 1x lampholder
- 4-pin CFL options available
- Cord: 10' AWM-type provided
- Bronze or Satin Nickel

STEM PENDANT



- Swivel at canopy, suitable for sloped ceilings
- Includes telescoping section plus 4 connectable stem sections, (1x 3", 1x 6", 1x 12", 1x 18"), 10' max
- Bronze or Satin Nickel

LED 120V PENDANTS:

- Internal driver integrated in the lamp, GU24 base
- Total power of only 10 watts
- Dimmable with a standard dimmer
- Rated life: 30,000 hours
- Frosted acrylic diffuser
- 800 lumens
- CCT: 2800° Kelvin
- CRI: 80+

ACCESSORIES:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to 10' max. Telescoping adjustable section allows up to 3" movement.

- T20A-SN** or **T20A-BR** Adj. Section
- T203-SN** or **T203-BR** 3" Section
- T206-SN** or **T206-BR** 6" Section
- T212-SN** or **T212-BR** 12" Section
- T218-SN** or **T218-BR** 18" Section

Project Information: