


□ HEX NUT WITH WASHER (1)

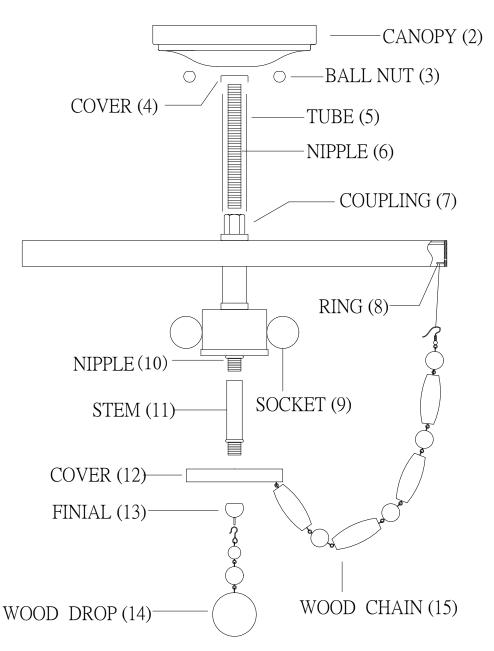

INSTALLATION INSTRUCTIONS

- 1. Carefully remove the fixture out of the carton, and check that all parts are included referring to the above illustration. Make sure not to misplace any parts that are needed for the installation;
- 2.Install the nipple (6) into coupling (7), then secure them with nipple (6).
- 3.Install the tube (5),cover (4) and canopy (2) onto nipple (6), then secure them with hex nut with washer (1).
- 4.Install the stem (11) onto nipple (10), then secure them with stem (11).
- 5.Install the cover (12) onto stem (11), then secure them with finial (13).
- 6.Install the wood chain (15) onto ring (8).
- 7.Install the wood drop (14) onto finial (13).
- 8. Fixture is ready for lamping and installation.