


Featuring an elegant minimal design, the Filo 23 outdoor wall sconce creates soft indirect illumination by aiming light back against the wall for accenting architectural features and for subtle, reduced-glare wayfinding. Sized to match architectural scale.

- **Selectable CCT (2700K/3000K)**
- **Universal 120V-227V**
- **Outstanding protection against the elements:**
 - Wet Listed IP65 Rated
 - Stainless Steel Mounting Hardware
 - Powder Coat Finishes

SPECIFICATIONS

DELIVERED LUMENS	1002
WATTS	20.69
VOLTAGE	Universal 120V-277V
DIMMING	Dimmable with most LED compatible ELV & TRIAC dimmers + 0-10V
LIGHT DISTRIBUTION	Symmetric
OPTICS	Downlight optic 30°
MOUNTING OPTIONS	Wall
CCT	3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G0
DARK SKY	Non Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	3.5 lbs.


* Visit techlighting.com for specific warranty limitations and details.

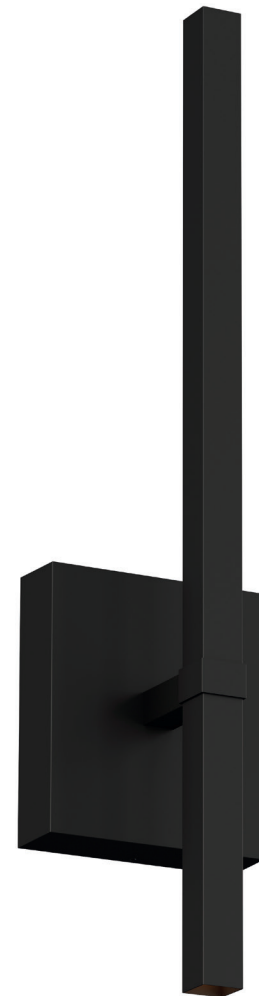

FILO 23 OUTDOOR WALL
shown in black

ORDERING INFORMATION

SERIES	CRI/CCT	LENGTH	FINISH	VOLTAGE
700WFLO	930 90 CRI 3000K	23 23"	B BLACK Z BRONZE	UNV 120V - 277V

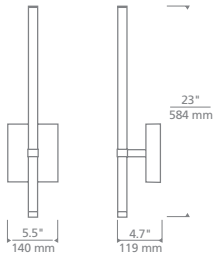

Filo 23 Outdoor Wall

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

<hr/> <hr/>	<hr/> <hr/>	<hr/> <hr/>
-------------	-------------	-------------



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.