

# SPINDLE Pendant

120v : **3-656-xxxx**

277v : **37-656-xxxx**

# oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-1314 Smoked Ombre Glass / Polished Chrome

-14 Clear Glass / Polished Chrome

-2018 Coffee Ombre Glass / Gunmetal

<b>LIGHT SOURCE</b>	1 x 5.12W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	6.57W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>SELECT COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 406 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	150mA, 6W
<b>DIMMING</b>	0-10v &Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Glass
<b>DIFFUSER/METAL FINISHES</b>	(-14) Clear Glass / Polished Chrome (-1314) Smoked Ombre Glass / Polished Chrome (-2018) Coffee Ombre Glass / Gunmetal
<b>MOUNTING</b>	4" Octagonal J-Box, 2" x 3" J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

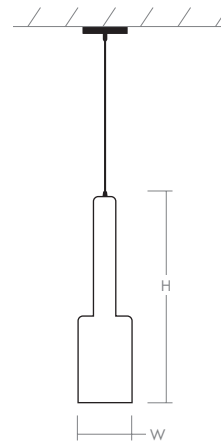

## DIMENSIONS

**Dia. Canopy: 5.75"**

**Dia. Fixture: 4.75"**

**H. Fixture: 18.75"**

**Supplied with 8 ft braided cord**

Order example for standard fixture:

**3-656-1314** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v, **37:** 277v

Order example for optional color temperatures: **3-656-271314**

**27:** 2700K, **35:** 3500K, **40:** 4000K

