

# INSTALLATION INSTRUCTIONS

For Model 2748-09


## READ AND SAVE THESE INSTRUCTIONS

These instructions are provided for your safety. It is essential to read them carefully and completely before installing the light fixture. We strongly suggest that all direct-wired fixtures be installed by a qualified, licensed electrician.

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**

**BEFORE INSTALLATION**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

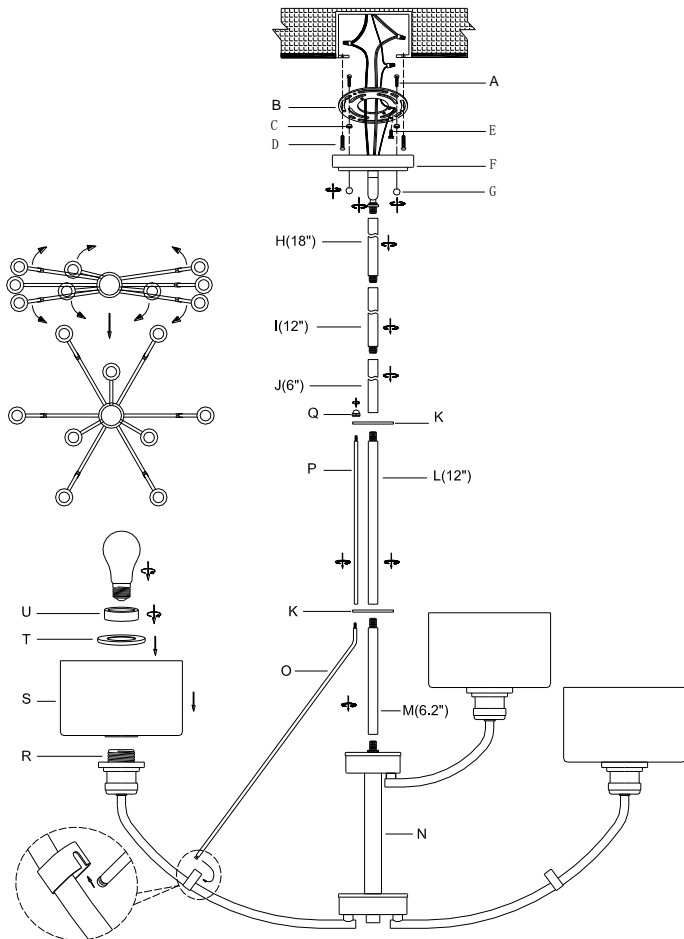

## PREPARING FOR INSTALLATIONS

Remove all contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

The mounting plate (B) contains several pairs of threaded holes. Find holes that match the spacing of the holes on the junction box and your fixture's canopy (F).

Two mounting screws (A) should be attached to the mounting plate (B). You may need to tighten the nuts that hold these screws in place. Pull the house wires through the center of the mounting plate (B). Place the mounting plate (B) over the junction box to align with the holes on the fixture's canopy (F). Secure the mounting plate (B) to the junction box by securely tightening the mounting screws (D).

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.


## ASSEMBLING THE FIXTURE

Rotate the top and bottom arms of the fixture so they are equally spaced around the fixture. Note: if the fixture does not hang straight, it is normally due to the unequal arm space.

Screw and tighten the rod (M) into the bolt on the column (N). Place the round plate (K) on top of the rod (M). Screw the rod (L) onto rod (M). Draw one end of the wire (O) into the U groove on the lamp arm and insert the other end with elbow into the hole on the plate (K). Screw the metal wire (P) to connect with the wire (O). Place the upper metal piece (K) onto the long rod (L) and the metal wire (P). Lock the wire (P) and plate (K) with nut (Q). Screw and tighten the 6" rod (J) onto the 12" rod (L). The rod (H) and (I) can use one or both according to the height of the ceiling.

## CONNECTING THE WIRES

Attach the fixture's wire to the power supply wires at the junction box. Connect the black wire to the black wire (or smooth), the white wire to the white (or ribbed) the ground wire to the ground wire (green or copper). Twist the end of the wire pairs together and twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate the ground screw (E) on the mounting plate (B) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure the ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

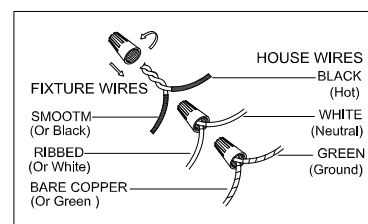

## FINISHING THE INSTALLATIONS

Place the canopy (F) to the ceiling and secure the canopy nuts (G) to the mounting plate (B) in place. Secure the glass (S) and the metal washer (T) onto the socket by screwing socket ring (U) until it is tightened. Adjust the glass to level. Install light bulb(s) (not included) accordance with the fixture's specifications. Do not exceed the recommended maximum wattage.

Your installation is now complete. Turn on the power and test the fixture.