

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, stairways and more. **For commercial applications in which 24/7 use is required, use model FMLRL.**

CONSTRUCTION

Features a white acrylic diffuser and is available in 11", 14", and 20" sizes. Hidden cam-latches provide easy diffuser removal for installation and maintenance.

OPTICS

11" units produce 1400 lumens, 14" units produce 2100 lumens, and 20" units produce 4000 lumens, all at 30,000 hours life.

ELECTRICAL

Fixture operates at 120 volts, 60 Hz. 11" Standard input = 20 watts, 70 lumens per watt.

14" Standard input = 30 watts, 70 lumens per watt.

20" Standard input = 44 watts, 90 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included.

LISTINGS

cUL Certified to US and Canadian standards and listed suitable for damp locations.

WARRANTY

5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor

Residential LED Low Profile Round



Flush Mount

HIGH-PERFORMANCE LED



Specifications

	11"	14"	20"
Diameter:	11 (27.9)	13.75 (34.9)	20 (5.8)
Depth:	3.25 (8.3)	3.5 (8.9)	4 (10.2)
Weight:	1 lbs (.5 kg)	1.5 lbs (.7 kg)	4.4 lbs (2 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMLRDL 11 14840




Series	Module/CRI	Color temperature
FMLRDL 11 11" Residential LED low profile round flush mount	148 >80	40 4000 K
FMLRDL 14 14" Residential LED low profile round flush mount	218 >80	35 3500 K ¹
FMLRDL 20IN 20" Residential LED low profile round flush mount	358 >80	30 3000 K ¹
		27 2700 K ¹

Notes

¹ Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.

Residential LED Low Profile Round Flush Mount

LIGHTING FACTS

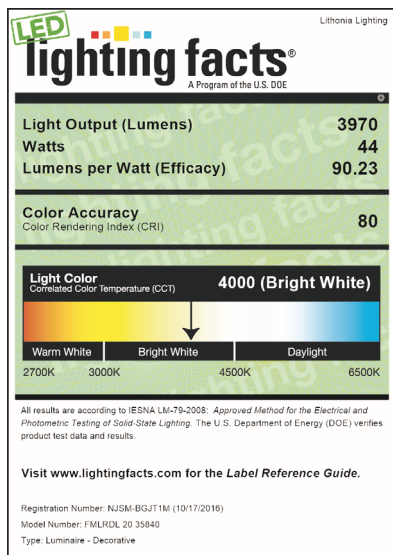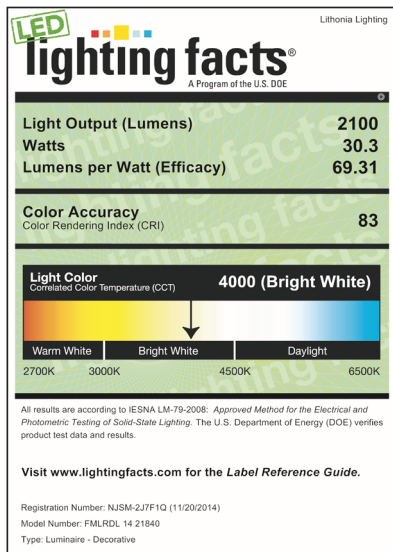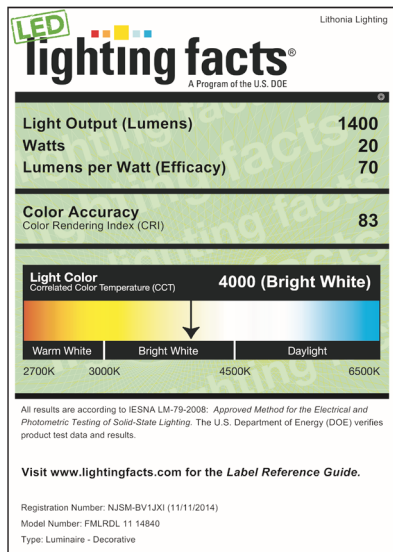

SUGGESTED DIMMERS

The FMLRDL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Lutron	CT-600P/CT-603P
	DV-600P/DV-603P
	CTCL-153P
	DVCL-153P
	AYCL-153P
Leviton	DVELV-300P
	R50-IPL06
	6615-P
Pass & Seymour	HCL453PTCCCV6

PHOTOMETRICS

Full photometric data report available two weeks from request. Consult factory.