

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Geos 15" & 22" Ceiling Mount

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
FM-4615 15"	2700K 90	29.5W	2330	1485	BR Brushed Brass
	3000K 90	28.5W	2355	1660	TT Titanium WT White

Example: **FM-4615-27-BR**

DESCRIPTION

Cutting-edge technology in the display industry transformed into a super-thin, less than an inch profile flush mount. Multiple mid-powered LED source illuminate the diffuser uniformly and without socket shadows common in conventional flush mounts.

FEATURES


- Super thin, edge-lit LED panel at less than an inch thick
- Twist-lock quick install mechanism
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K, 3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard., Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with frosted acrylic diffuser



FINISHES

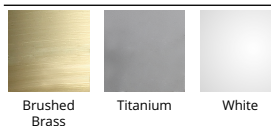

LINE DRAWING

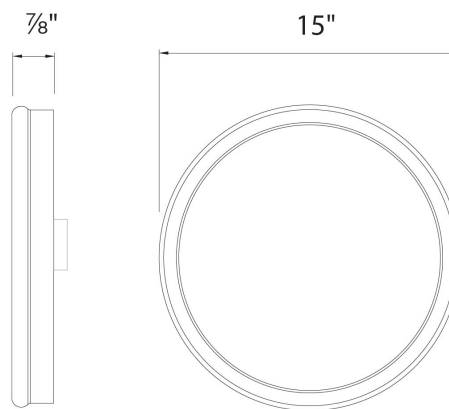

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Geos 15" & 22" Ceiling Mount

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
FM-4622 22"	2700K 90	44.5W	3745	2235	BR Brushed Brass
	3000K 90	42.5W	3785	2375	TT Titanium WT White

Example: **FM-4622-27-BR**

DESCRIPTION

Cutting-edge technology in the display industry transformed into a super-thin, less than an inch profile flush mount. Multiple mid-powered LED source illuminate the diffuser uniformly and without socket shadows common in conventional flush mounts.

FEATURES


- Super thin, edge-lit LED panel at less than an inch thick
- Twist-lock quick install mechanism
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 year warranty

SPECIFICATIONS

Color Temp:	2700K, 3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard., Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with frosted acrylic diffuser



FINISHES



LINE DRAWING

