

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Dice Ceiling Mount

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
FM-4006 6"	2700K 90	BN Brushed Nickel	17.5W	1400	700	No
	2700K 90	BZ Bronze	17.5W	1400	700	Yes
	2700K 90	CH Chrome	17.5W	1400	700	Yes
	3000K 90	BN Brushed Nickel	17.5W	1444	721	Yes
	3000K 90	BZ Bronze	17.5W	1444	721	Yes
	3000K 90	CH Chrome	17.5W	1444	721	Yes

Example: **FM-4006-27-BN**

- For 277V special order, add an "F" before the finish: FM-4012F-27-BN
- For alternate color temperature, special order adding -27 or -30 or -35: FM-4012F-27-BN

DESCRIPTION

Thick-walled glass is uniformly illuminated in a design made for LED technology in a square format. Full range dimming control. Mounts as robust ceiling luminaire or a compelling wall sconce.

FEATURES


- Etched 3/4" thick pressed glass diffuser with interior ceramic glaze
- Title 24 may not be available for all finishes, check for availability
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K, 3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	45000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard., Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Energy Star 2.0, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Durable steel body with thick opal glass



FINISHES

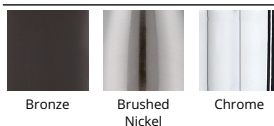

LINE DRAWING

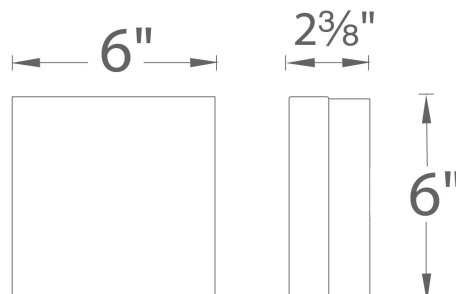

FM-4006

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Dice Ceiling Mount

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
FM-4009 9"	2700K 90	BN Brushed Nickel	31W	2750	1495	Yes
	2700K 90	BZ Bronze	31W	2750	1495	Yes
	2700K 90	CH Chrome	31W	2750	1495	Yes
	3000K 90	BN Brushed Nickel	31W	2765	1511	No
	3000K 90	BZ Bronze	31W	2765	1511	Yes
	3000K 90	CH Chrome	31W	2765	1511	No

Example: **FM-4009-27-BN**

- For 277V special order, add an "F" before the finish: FM-4012F-27-BN
- For alternate color temperature, special order adding -27 or -30 or -35: FM-4012F-27-BN

DESCRIPTION

Thick-walled glass is uniformly illuminated in a design made for LED technology in a square format. Full range dimming control. Mounts as a robust ceiling luminaire or a compelling wall sconce.

FEATURES


- Etched 3/4" thick pressed glass diffuser with interior ceramic glaze
- Title 24 may not be available for all finishes, check for availability
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K, 3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	45000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard., Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Energy Star 2.0, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Durable steel body with thick opal glass



FINISHES



LINE DRAWING

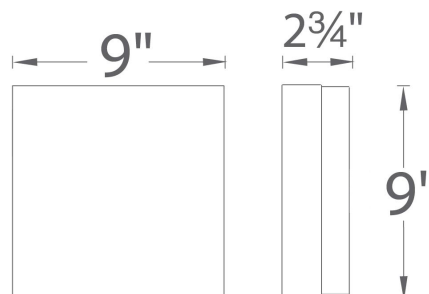

FM-4009

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Dice Ceiling Mount

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
FM-4012 12"	2700K 90	BN Brushed Nickel	27W	2584	1096	No
	2700K 90	BZ Bronze	27W	2584	1096	No
	2700K 90	CH Chrome	27W	2584	1096	No
	3000K 90	BN Brushed Nickel	27W	2668	1145	No
	3000K 90	BZ Bronze	27W	2668	1145	No
	3000K 90	CH Chrome	27W	2668	1145	No

Example: **FM-4012-27-BN**

- For 277V special order, add an "F" before the finish: FM-4012F-27-BN
- For alternate color temperature, special order adding -27 or -30 or -35: FM-4012F-27-BN

DESCRIPTION

Thick-walled glass is uniformly illuminated in a design made for LED technology in a square format. Full range dimming control. Mounts as a robust ceiling luminaire or a compelling wall sconce.


FEATURES

- Etched 3/4" thick pressed glass diffuser with interior ceramic glaze
- Title 24 may not be available for all finishes, check for availability
- ACLED driverless technology
- 5 year warranty


SPECIFICATIONS

Color Temp:	2700K, 3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	45000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard., Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Energy Star 2.0, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Durable steel body with thick opal glass

FINISHES

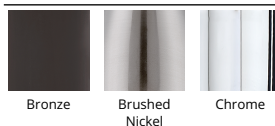

LINE DRAWING

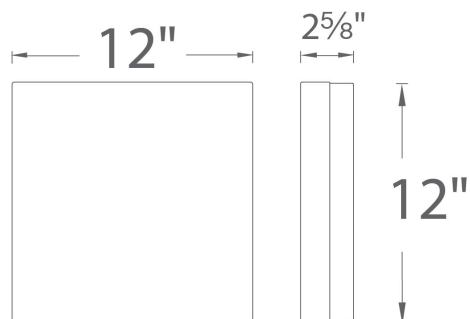

FM-4012