

# LIBERTY Pendant

120v : **3-652-xxxx**

277v : **37-652-xxxx**

# oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-1314 Smoked Ombre Glass / Polished Chrome

-14 Clear Glass / Polished Chrome

-2018 Coffee Ombre Glass / Gunmetal

- LIGHT SOURCE** 1 x 5.12W LED, 3000K, CRI 90
- LUMINAIRE POWER** 6.57W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 401 lm (LM-79)
- INPUT VOLTAGE** 120V or 277V
- DRIVER OUTPUT** 150mA, 6W
- DIMMING** 0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER/METAL FINISHES**
  - (-14) Clear Glass / Polished Chrome
  - (-1314) Smoked Ombre Glass / Polished Chrome
  - (-2018) Coffee Ombre Glass / Gunmetal
- MOUNTING** 4" Octagonal J-Box, 2" x 3" J-Box
- STANDARDS** ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

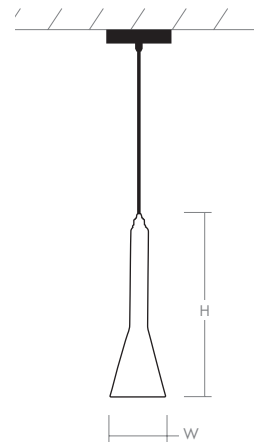

- DIMENSIONS**
- Dia. Canopy: 5.75"**
- Dia. Fixture: 4.50"**
- H. Fixture: 16.25"**
- Supplied with 8 ft braided cord**

Order example for standard fixture:  
**3-652-1314** (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)  
3: 120v, 37: 277v  
Order example for optional color temperatures: **3-652-271314**  
27: 2700K, 35: 3500K, 40: 4000K

