
ASSEMBLY INSTRUCTIONS



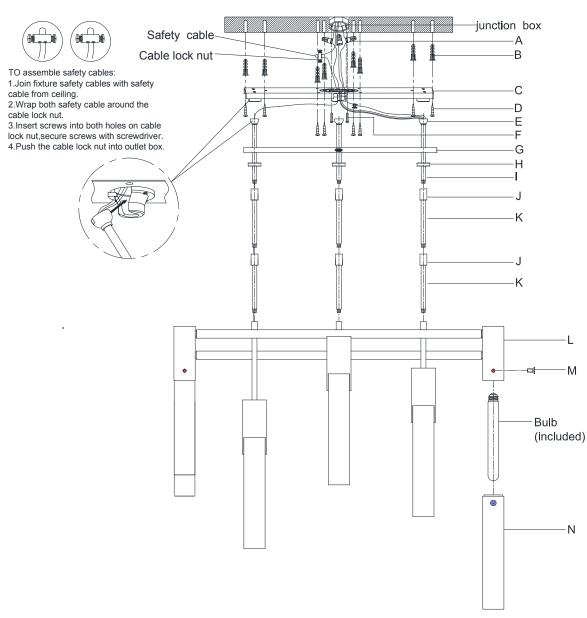

Covet Large Chandelier

Item # KW 5115

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.


NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.

- 2. Remove the mounting plate (C) from the canopy (G) by loosening the collar ring (H).
- 3. Put the mounting plate (C) on the ceiling and mark the holes position with pencil.
- 4. Drill 6 holes on the ceiling, then knock the anchors (B) into the holes.
- 5. Thread the rods (K) to the top of the fixture body (L), then thread another rods (K) to the connector (J).
- 6. Let the collar ring (H) and canopy (G) pass through the rods (K).
- 7. Thread the rods (I) to the connector (J).
- 8. Affix mounting plate (C) onto the junction box and secure with mounting screws (F), then secure the wood screws (D) to the anchors (B) and lock tight.
- 9. Hang the rod (I) with top end ball (E) provided on the mounting plate (C).
- 10. Connect the fixture Ground (bare) wire with the ground wire from the juncton box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the junction box.
 - IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- 11. Connect the fixture Neutral wire (ribbed) with the neutral wire (usually white) from the junction box using wire nut (A).
- 12. Connect the fixture Hot wire (smooth,marks with words) with the hot wire (usually black) from the junction box using wire nut (A).
 - DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.



ASSEMBLY INSTRUCTIONS

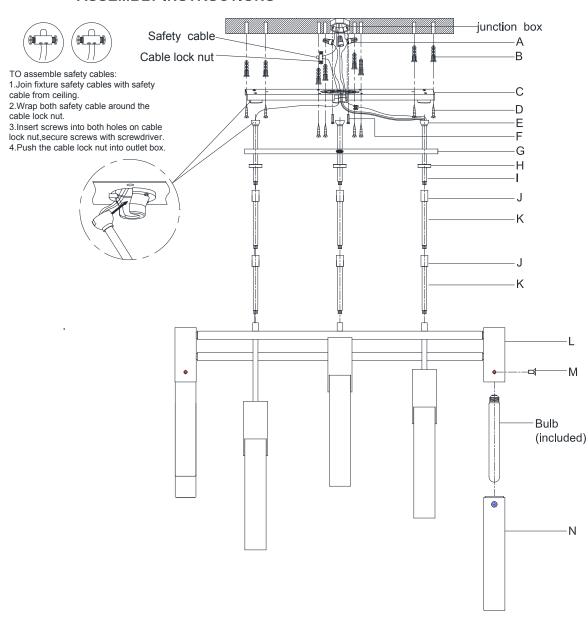



WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND **INSTALLATION ARE FINAL.**

- 13. Tuck these wire connections neatly into the junction box to secure.
- 14. Put canopy (G) flush to the mounting plate (C) and secure with collar ring (I).
- 15. Insert the bulbs (provided) to the sockets.
- 16. Attach the alabaster shade (N) to the fixture body (L) and secure with screws (M).
- 17. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.cal agents.



