



JOB NAME _____

CONTACT _____

ORDERING CODE _____

BINA Bina Pendant Square



ORDERING CODE		
SERIES	BINA-P	bina pendant
TYPE	SQ	square
CCT	27K	2700K
	30K	3000K
	35K	3500K
SIZE	16	16" x 16"
	24	24" x 24"
	32	32" x 32"
	40	40" x 40"
CURRENT	325	325mA
	500	500mA
	675	675mA
	850	850mA
	1050	1050mA
LIGHT OUTPUT	D	direct only
	DI	direct/indirect
HOUSING COLOR	BK	black
	WH	white
	MC	matte chrome
BEZEL COLOR	BK	black
	WH	white
	MC	matte chrome
CANOPY COLOR	BK	black
	WH	white
	MC	matte chrome

ORDERING CODE _____

Follow the steps to specify your fixture, example:
BINA-P-SQ-27K-32-500-D-WH-BK-BK

DIRECT (3000K)					
SIZE	325MA	500MA	675MA	850MA	1050MA
16"	830lm / 10W	1290lm / 16W	1705lm / 21W	2110lm / 25W	2575lm / 32W
24"	1210lm / 14W	1880lm / 21W	2490lm / 28W	3080lm / 35W	3750lm / 41W
32"	1750lm / 21W	2715lm / 32W	3590lm / 42W	4450lm / 52W	5410lm / 63W
40"	2420lm / 25W	3750lm / 42W	4960lm / 54W	6145lm / 67W	7470lm / 82W

INDIRECT (3000K)					
SIZE	325MA	500MA	675MA	850MA	1050MA
16" / 24"	525lm / 6W	790lm / 8W	1050lm / 10W	1300lm / 12W	1575lm / 15W
32" / 40"	860lm / 9W	1330lm / 14W	1800lm / 18W	2270lm / 23W	2900lm / 28W

DESCRIPTION

- Slim aluminum luminaire
- Black, white or matte chrome
- Black, white, or matte chrome decorative bezel
- Ultra thin 1.5" profile

ELECTRICAL/CONTROLS


- 30, 40, 60, 78 Watt Direct Systems
- 45, 55, 86, 104 Watt Direct/Indirect Systems
- 120-277V driver, 50/60Hz input
- 0-10V Dimming to 1%

LISTING


- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

LED INFO

- LED: Luminus MP Series
- SDCM: 3-step MacAdam Ellipse
- CCT: 2700K, 3000K or 3500K
- CRI: >80
- Lumen Maintenance: L₇₀ > 50,000 hrs

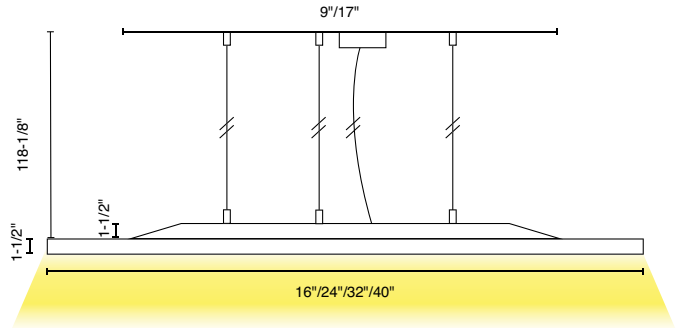

Direct

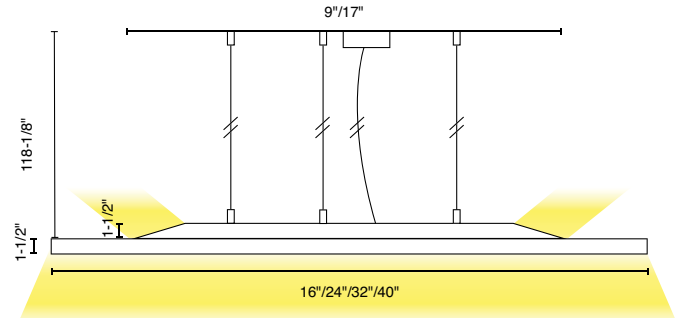

Direct/Indirect