

# Reveal LED Flush Mount RVF Series

# **Features**

Low profile design with edge-lit light panel construction. Ideal use in kitchens, hallways, and anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).

## Construction

Housing is die-formed steel. Standard mounting holes and hardware included. Power supply connections must be made inside juncion box (not included).

### **Finish**

Painted Black/Gold or White/Black finish combination.

## Diffuser

White acrylic.

# **Electrical**

#### **D1** Driver

Input 120 VAC, 60 Hz. The LED driver is dimmable with a 2-wire (TRIAC) or electronic low voltage (ELV) dimmer switch.

#### D2 Driver

Input 120-277 VAC 60 Hz. LED driver is dimmable 0-10V DC.

# **LED**

Integrated LED modules capable of producing: 17.5W = 1400 source lumens, 819 delivered lumens 35W = 2600 source lumens, 1485 delivered lumens 3000K (CCT). Rated for 50,000 Hrs. 90 CRI.

## Certification

All fixtures are cETLus listed for indoor damp locations.

# Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions subject to change without notice.












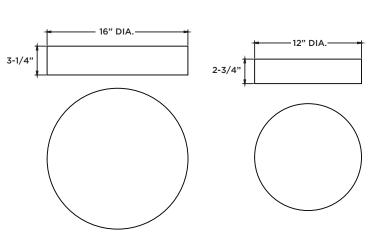

# **Ordering Information:**

				Source	Delivered			
Black/Gold	Black/White	White/Black	LED	Lumens	Lumens	CCT	DIA.	D
RVF121400L30D1BKGD	RVF121400L30D1BKWH	RVF121400L30D1WHBK	17.5W	1400	819	3000K	12"	2-3/4"
RVF121400L30D2BKGD	RVF121400L30D2BKWH	RVF121400L30D2WHBK	17.5W	1400	819	3000K	12"	2-3/4"
RVF162600L30D1BKGD	RVF162600L30D1BKWH	RVF162600L30D1WHBK	31W	2600	1485	3000K	16"	3-1/4"
RVF162600L30D2BKGD	RVF162600L30D2BKWH	RVF162600L30D2WHBK	31W	2600	1485	3000K	16"	3-1/4"