


Assembly Instructions: 1323-FM (Ella)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase.

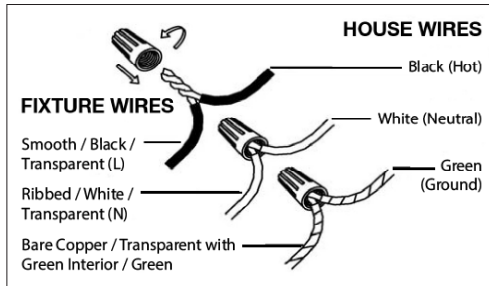


PREPARING FOR INSTALLATION

Carefully remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

From the parts bag remove the mounting strap assembly. One end of nipple (M) should be attached to mounting strap (A) with washer (O) and hex nut (P) in place. Attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver. Tighten securely.

CONNECTING THE WIRES

Have an assistant support the fixture's weight while completing the wiring. Cut away excess wire. Thread the fixture's wires through the nipple. Attach the fixture's wires to the power supply wires from the junction box. Connect black to smooth/black/transparent (L) wire; white to ribbed/white/transparent (N) wire; ground to ground (green or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw on the mounting bracket/mounting strap and wrap the fixture's ground wire around the green ground screw. Use a screwdriver to secure ground screw onto the mounting bracket/mounting strap. Tuck all wires neatly into the junction box.

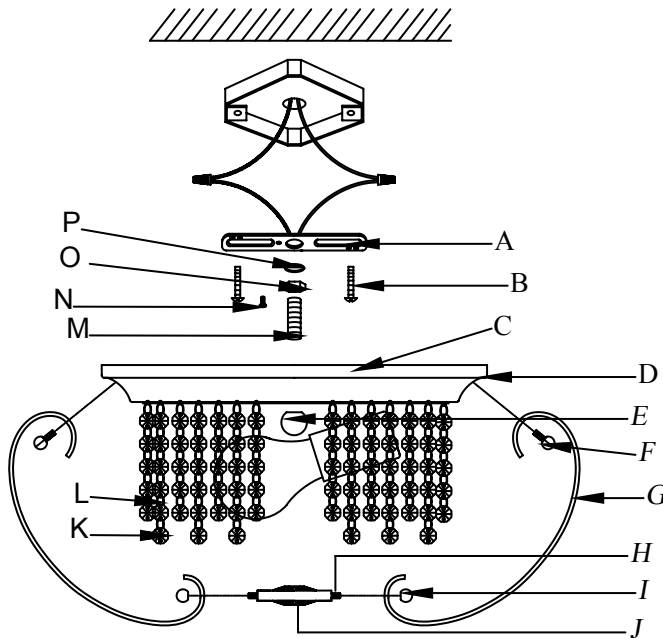

FINISHING THE INSTALLATION

Raise ceiling pan (C) up to cover mounting strap (A) and secure the ceiling pan in place by threading decorative nut (E) onto nipple (M).

Carefully install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage. Refer to the crystal installation sheet and carefully hang crystal strands (L) and (K) as depicted.

Fixture arms (G) are unattached to ceiling pan (C). Thread decorative screws (F) into both posts (D). Finally, thread decorative nuts (I) onto posts (H) of bottom cap (J).


Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture. Dry with a lint-free or microfiber cloth.


1323 Crystal Instructions

A - crystal drop




AA is a double sided crystal,
50mm
Part: PT-CRYSTAL-1323-AA


AS is a single sided crystal,
50mm
Part: PT-CRYSTAL-1323-AS




A1



A2

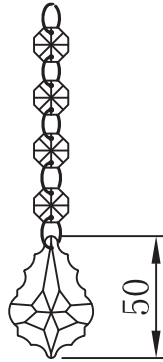


A3

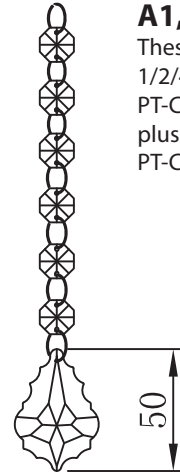

A4


A1, A2, A3, and A4
These crystal drops use
1/2/4/6 pieces of
PT-CRYSTAL-1323-D14
plus 1 piece of
PT-CRYSTAL-1323-AS

B - crystal drop




BB is a double sided crystal,
76mm
Part: PT-CRYSTAL-1323-BB

BS is a single sided crystal,
76mm
Part: PT-CRYSTAL-1323-BS



BB1


BB1 uses 1 piece of
PT-CRYSTAL-1323-D14 plus
1 piece of PT-CRYSTAL-
1323-BS




B2

B2 uses 2 pieces of
PT-CRYSTAL-1323-D14
plus 1 piece of
PT-CRYSTAL-1323-BS

C - crystal drop




CC is a double sided crystal,
89mm
Part: PT-CRYSTAL-1323-CC

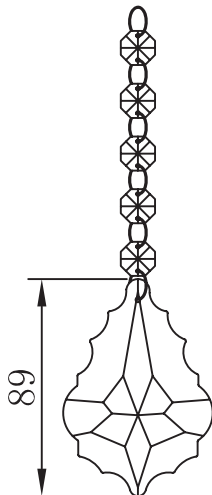

CC5

CC5 uses 5 pieces of part
PT-CRYSTAL-1323-D14 plus
1 piece of PT-CRYSTAL-
1323-CC

D - crystal drop



D5/D6 uses 5/6 pieces of
replacement part
PT-CRYSTAL-1323-D12