



15396 AZT

15396 BE

MINIATURE HOODED ADJUSTABLE WIDE FLOOD LIGHT

Small (4½" x 5") eyebrow allows adjustment to upwards position without glare. Use for wide-angle wall washing, with young shrubs and low walls.

SPECIFICATIONS

Housing Durable die-cast aluminum construction. Heat-resistant flat glass lens is fully sealed for outdoor usage.

Finish Textured Architectural Bronze, Beach

Wiring 35° of usable #18-2, SPT-1-W leads. Cable connector supplied with fixture. 12-Volt bi-pin, high temperature porcelain socket.

Light Bulb 35-W. QT3 (15549CLR) (nominal at 12-Volts) supplied

Mounting Accessories Included
8" In-ground stake

Optional Mounting Accessories
15601 – Surface Mounting Flange

15607 – Tree/Surface
Mounting Bracket

15656, 15657, 15658 – Stems


15649 – Stem Coupler

Vertical Illuminance (FC)

Mounting Distance from Surface	A	B	C	D	E	F
3'	13.89	8.33	2.78	1.39	.28	.14
4'	7.81	4.69	1.56	.78	.16	.08
5'	5	3	1	.5	.1	.05
6'	3.47	2.08	.69	.35	.07	.03
7'	2.55	1.53	.51	.26	.05	.03
8'	1.95	1.17	.39	.2	.04	.02
9'	1.54	.93	.31	.15	.03	.02
10'	1.25	.75	.25	.13	.03	.01

Aluminum only light bulb conversion:
75W, T4 B4PIN, FCX1.54

*See pages 119–121 for more light bulb options.

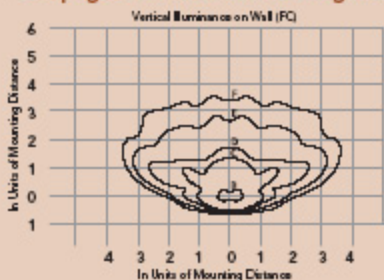

U.S. Patent Pending

