GENERATION LIGHTING

Outdoor


GENERAL PRODUCT INFORMATION:

This product is safety listed for wet locations.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

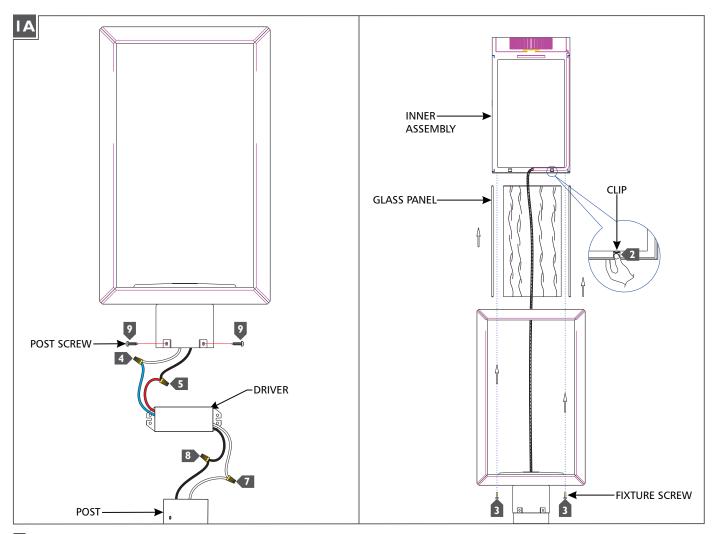

- Remove the inner assembly from the fixture by loosening the fixture screws.
- Insert the glass panels into the LED assembly housing and secure them in place using the clips.
- 3 Insert the inner assembly into the fixture and secure it in place using the housing screws.
- 4 Connect the blue driver wire to the white fixture wire with a wire nut.
- 5 Connect the red driver wire to the black wire with a wire nut.
- 6 Connect the fixture to a suitable ground in accordance to local electrical codes.
- **7** Connect the white driver wire to the neutral power line wire with a wire nut.
- 8 Connect the black driver wire to the hot power line wire with a wire nut.
- Secure the fixture to the post with the post screws making sure to neatly tuck in the driver and all wiring.

SAVETHESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.