

INSTRUCTION SHEET

345N08

NOTE: Please consult a qualified electrician if you are not certain of installation or servicing.

CAUTION:

- Before starting installation or servicing, disconnect power by turning off the circuit breaker or by removing the fuse at the fuse box.
- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly of this lighting fixture.
- **SAVE THESE INSTRUCTIONS**

To Assembly:

1. Carefully unpack the fixture, spread out fixture, and lay out all parts on a clean surface.
2. Place Top Loop (K) over the threaded pipe (L) and screw until tight
3. Connect wire using Wire Nuts (A)
4. Install Mounting strap (C) to the Outlet box by Mounting Screws (B)
5. Place the Canopy (F) over the Nipple (E) all the way to the ceiling and tighten the Ring (G) onto the Screw Collar (H) until the Canopy (F) was held firmly against the ceiling.
6. Tighten the Quick link (I) into Top Loop (K).
7. Install **8-60W.max, TYPE B bulb or 13W self-ballasted bulb (Bulbs NOT included)**(O)
8. After Lamping, attach crystal (H) See drawing-1.
9. **Turn on power.**

Enclosed Parts:

A. Wire Nuts
D. Ground Screw
G. Collar Loop
J. Chain
M. Nipple-1
P. Crystal



B. Mounting Screw
E. Nipple
H. Collar Ring
K. Top Loop
N. Nurple Nut

C. Mounting Strap
F. Canopy
I. Quick Link
L. Stem
O. Bulb

INSTRUCTION SHEET
345N03

CAUTION: * fixture starting installation or existing disconnect power by turning off the circuit breaker. These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly of this lighting fixture.

To Assemble:

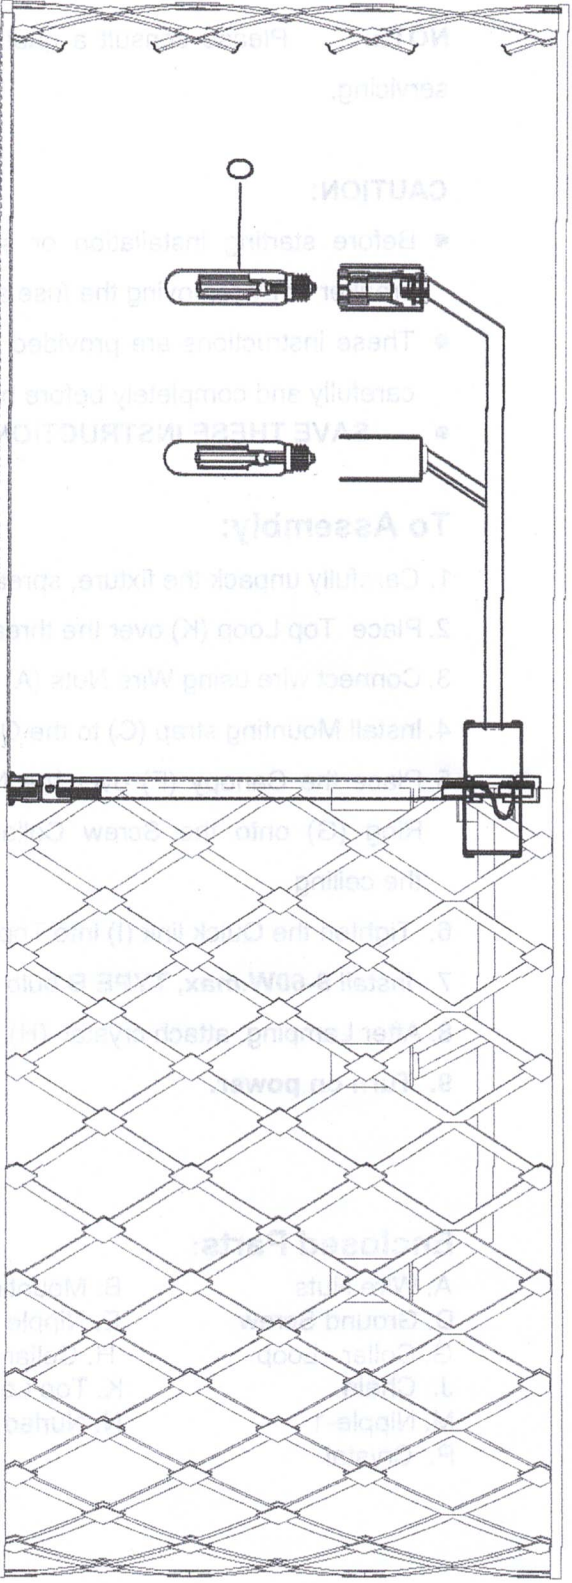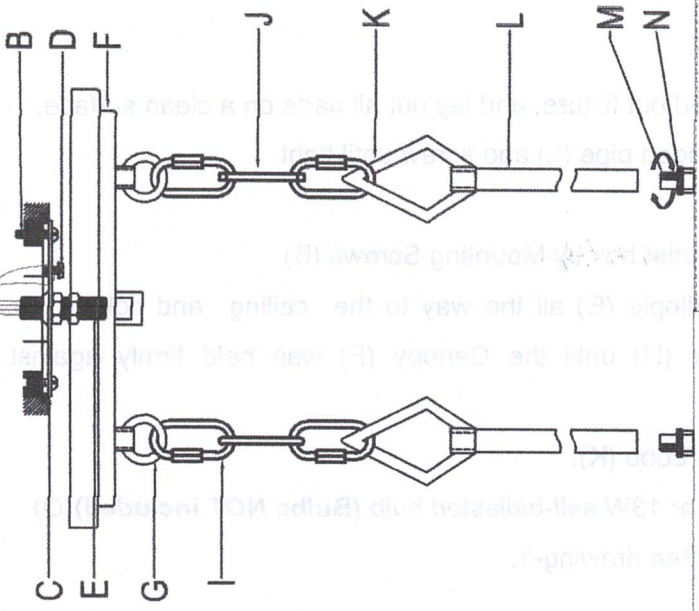

DRAWING-1

