



Assembly Instruction Sheet #S-1502W7 For Style 1502W7

Tools Required: Flathead screwdriver, Philips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (1) 120V LED 10W DIMMABLE (2700K, 3000K, 3500K, 4000K, 5000K)
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

-  [A] Fixture Body x1
-  [B] Crystal x1

Hardware Contents

| PART | DESCRIPTION | QUANTITY |
|------|-------------|----------|
| BB | Wire nut | 2pos |
| CC | Screw | 2pos |



STEP 1- Release Mounting bracket from Ceiling Canopy.

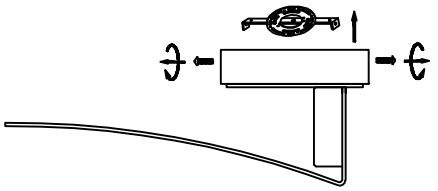


Figure 1

STEP 2 - Attach Mounting bracket to Outlet Box
 A. Pass the supply wires through the Mounting bracket (EE) Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws. Tighten until snug.

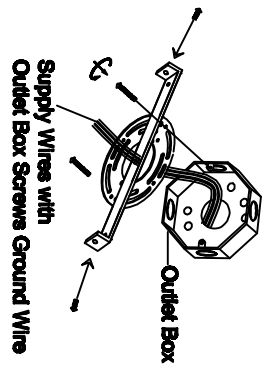


Figure 2

STEP 4 - Install Ceiling Canopy to Ceiling

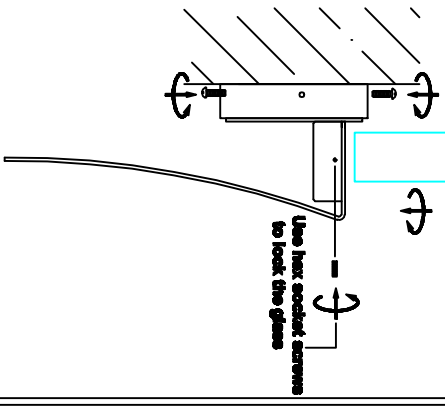


Figure 4

STEP 3 - Wire Connections

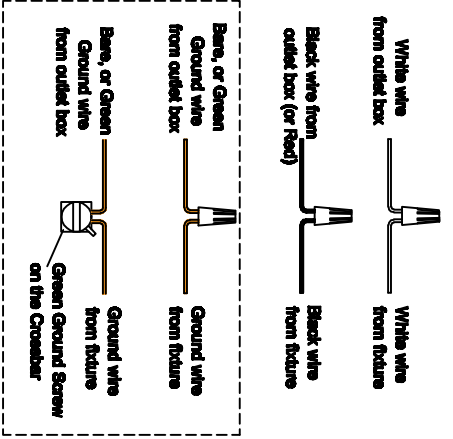


Figure 3

STEP 5 - Install tube.

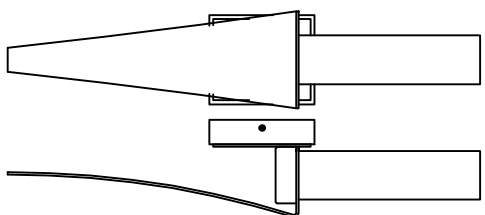


Figure 5