

JOB NAME _____

CONTACT _____

ORDERING CODE _____



Z15 LED Canopy Spot Xicato



XICATO XTM MODULE - ORDERING CODES		
PART NUMBER	137420	
LED	XTM19 XICATO XTM 19mm	
DELIVERED LUMENS	11LM 835 lm 13LM 950 lm 16LM 1160 lm 20LM ¹ 1470 lm Standard Configuration: 3000K 83CRI SA20	
CCT	27K 2700K 30K 3000K 35K 3500K 40K 4000K	
CRI	83 83 CRI 98 98 CRI	
REFLECTOR & LUMEN MULTIPLIER	SA20 20° specular (1.00) SA40 40° specular (1.00) SA60 60° specular (0.99) SSA20 20° semi-specular (0.92) SSA40 40° semi-specular (0.82) SSA60 60° semi-specular (0.93) DA20 20° diffused (0.86) DA40 40° diffused (0.88) DA60 60° diffused (0.89) 10° narrow beam angle, see page 2 for details.	
VOLTAGE	120 UNV 120V 120V-277V	
DIMMING	ELV ² 10% trailing edge dimming 10V ³ 0-10V dimming to 10% See Dimming Availability Chart at the bottom of this page for details.	
FINISH	BK black WH white MC matte chrome	
MOUNTING OPTIONS	MP monopoint canopy	
STEM LENGTH	5 5" stem 28 ⁴ 28" stem 48 ^{4,5} 48" stem 60 ^{4,5} 60" stem 72 ^{4,5} 72" stem 96 ^{4,5} 96" stem 120 ^{4,5} 120" stem	
LITE OPTICS	CLR standard snoot / lens	

DESCRIPTION

Z15 is a performance spot fixture in a par20 cylinder form factor integrated with industry best LEDs up to 1470 lm. Z15 has many options for most applications and carries the first 5 Year NO COLOR SHIFT AND FIXTURE WARRANTY.

HOUSING

Extruded aluminum housing with white, matte chrome or black finish

MOUNTING

- Canopy over a 3-1/2" to 4" recessed octagonal junction box for MP mounting option

LISTINGS

- ETLus Listed to UL1598 (suitable for dry and damp locations)
- cETL Listed to CSA C22.2 #250.0
- Made in the USA - meets the requirements of the Buy American provision within the ARRA

LED INFO

- XICATO XTM:
SDCM = 1x2 MacAdam Ellipse, Duv +/- 0.001, Lumen Maintenance: L₉₀ > 55,000 hrs

ORDERING CODE _____

Follow the steps to specify your fixture, example:
137420 - XTM19 - 20LM - 35K - 83 - SSA20 - 120 - ELV - MC - MP - 28 - CLR

XTM19 (LED)	POWER		DIMMING AVAILABILITY	
	DELIVERED LM	W (83 CRI)	W (98 CRI)	
835	13	14	11LM 83	•
950	15	17	11LM 98	•
1160	16	18	13LM 83	• •
1470	18	N/A	13LM 98	•
			16LM 83	• •
			16LM 98	• •
			20LM 83	• •
			20LM 98	

- Power Factor ≥ 0.9
- NOTES**
- 20LM not available in 98CRI.
 - ELV dimming only available in 120V.
 - 0-10V dimming only available in UNV voltage & stem lengths of 5 and 28.
 - Field cuttable to specific length; length may be specified in 1" increments at additional charge.
 - Stem lengths of 48, 60, 72, 96 and 120 only available for ELV.

10° NARROW BEAM - ORDERING CODES

PART NUMBER	137420	
LED	XTM09	XICATO XTM 9mm
DELIVERED LUMENS	12LM	900 lm
CCT	27K 30K 35K 40K	2700K 3000K 3500K 4000K
CRI	83	83 CRI
REFLECTOR	SA10	10° specular
VOLTAGE	120 UNV	120V 120V-277V
DIMMING	ELV¹ 10V²	10% trailing edge dimming 0-10V dimming to 10%
FINISH	BK WH MC	black white matte chrome
MOUNTING OPTIONS	MP	monopoint canopy
STEM LENGTH	5 28³ 48^{3,4} 60^{3,4} 72^{3,4} 96^{3,4} 120^{3,4}	5" stem 28" stem 48" stem 60" stem 72" stem 96" stem 120" stem
LITE OPTICS	CLR	standard snoot / lens

ORDERING CODE

Follow the steps to specify your fixture, example:
137420 - XTM09 - 12LM - 35K - 83 - SA10 - 120 - ELV - BK - MP - 28 - CLR

XTM09 (LED)	POWER
DELIVERED LM	W (83 CRI)
900	16

Power Factor ≥ 0.9

NOTES


1. ELV dimming only available in 120V.
2. 0-10V dimming only available in UNV voltage & stem lengths of 5 and 28.
3. Field cuttable to specific length; length may be specified in 1" increments at additional charge.
4. Stem lengths of 48, 60, 72, 96 and 120 only available for ELV.

MOUNTING OPTIONS


Mounting Options

MP monopoint canopy


H	
5	5" stem
28	28" stem (field adjustable to 6")
48	48" stem (field adjustable to 6")
60	60" stem (field adjustable to 6")
72	72" stem (field adjustable to 6")
96	96" stem (field adjustable to 54")
120	120" stem (field adjustable to 66")

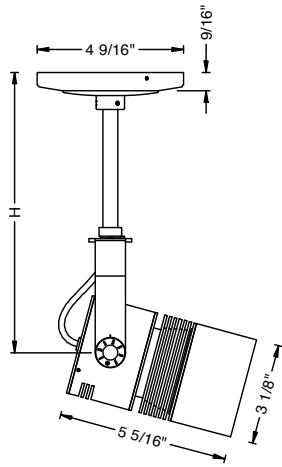

ELV
Stem Lengths of 5 and 28

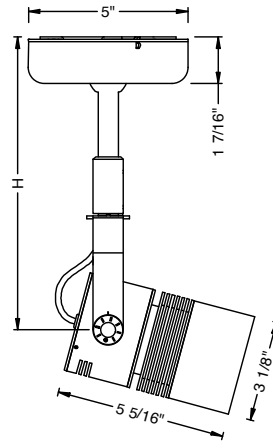

ELV
Stem Lengths of 48 thru 120

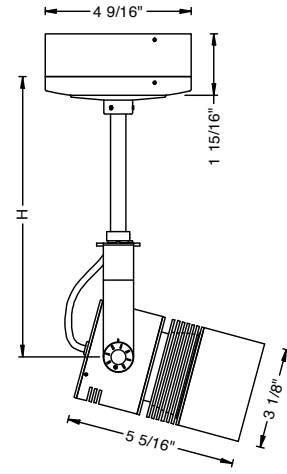

10V
Stem Lengths of 5 and 28

ACCESSORIES

- 900300BK snoot, black
- 900300MC snoot, matte chrome
- 900300WH snoot, white
- 900310 louver, black
- 900305BK¹ barn doors, black
- 900320 linear lens
- 900321 diffuser lens
- 900322 frosted lens

Notes


1. Barn Doors Requires 900300 Snoot Accessory.



*shown with no accessory



Snoot

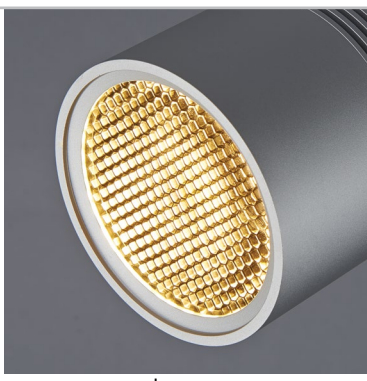

Louver



Barn Doors



900321

900322

900320

Lens Options