


INSTALLATION INSTRUCTION OF CORD AND PLUG

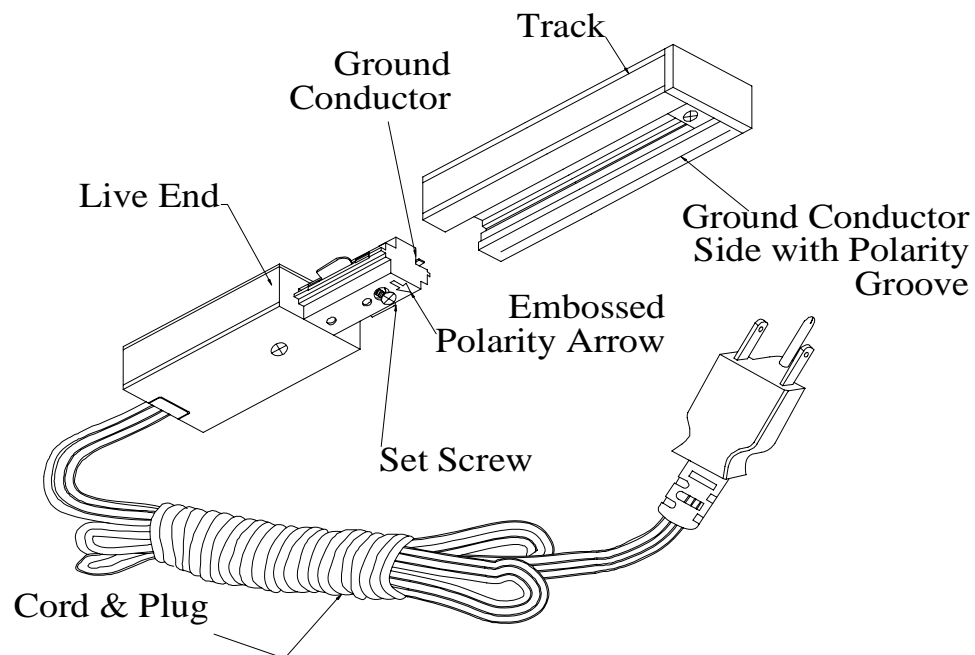

CAUTION - DO NOT plug into wall outlet until Live End is properly installed into track as shown. The contact tabs at end of Live End are "HOT" and "DANGEROUS" as soon as it is plugged into wall outlets. MAXIMUM capacity Live End with cord set is 10 AMPS. DO NOT OVERLOAD.

1. Loosen set screw and insert connector with embossed polarity arrow (Ground conductor side) pointing to ground conductor side with polarity groove on track for proper installation.
2. Tighten set screw to lock to track. **NOTE** : Track ends must be terminated with either a Dead End or a connector.

SAVE THESE INSTRUCTIONS

Warning: To avoid the potential risk of fire and shorting, under any circumstances **should not** you use the connectors and end cap **without** busbar stoppers (Drawings below with "X" mark) for your track system.

