

---

## ProLED linear

Everyone loves simplicity. That is exactly what you get when ordering this linear design. All accessories are included, and the ease of installation make it the right choice for your project.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
<b>HLF09-3K</b>	9"	3 W	200 lm	250 lm	90	3000 K	120 V
<b>HLF12-3K</b>	12"	4 W	380 lm	450 lm	90	3000 K	120 V
<b>HLF18-3K</b>	18"	8 W	675 lm	750 lm	90	3000 K	120 V
<b>HLF24-3K</b>	24"	12 W	900 lm	1000 lm	90	3000 K	120 V
<b>HLF30-3K</b>	30"	16 W	1100 lm	1200 lm	90	3000 K	120 V

### Specifications

120 V direct connection or plug-in  
 Dimmable with regular low-voltage electronic dimmers  
 Over 50,000 hours of service life  
 Interconnectable  
 Very low profile  
 Robust construction

### Note

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.

### Finish

○ **WH** White


### Accessories

**9000-ACCE24**  
 24" extension cord  
**9000-ACCE72**  
 72" extension cord


### Order example

**HLF18-3K-WH**  
 18" undercabinet fixed hardwire linear with 675 lumens at 3000K in a white finish


**HLF09**




**HLF12**



**HLF18**



**HLF24**

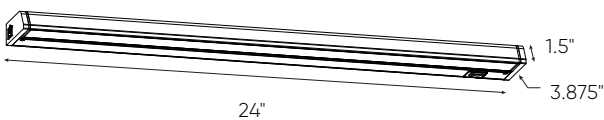

**HLF30**

