

Report No.: TH-3500A

Test Time: 2022/6/25 11:47

Luminaire Property

Luminaire Manufacturer:
Luminaire Category:
Lamp Catalog:
Number of Lamps:
Luminous Length (mm):
Luminous Height (mm):
Current: 0.075 A
Power Factor: 0.923

Luminaire Description: VCP2101AB
Lamp Description:
Lumens per Lamp:
Luminous Width (mm):
Voltage: 120.1 V
Power: 8.28 W


Photometric Results

CIE Class: Semi-Direct
Measurement Flux: 551.2 lm
Downward Ratio: 84%
Horizontal Diffuse Angle(50%): H181.8
Vertical Diffuse Angle(50%): V177.8
Luminaire Efficacy Rating (LER): 66.61
Max. Intensity: 89.26 cd
S/MH(C0/C180): 1.55


Total Rated Lamp Lumens: 551.2 lm
Efficiency: 100%
Upward Ratio: 16%

C0r0 Intensity: 87.9 cd
Pos of Max. Intensity: H0 V35
S/MH(C90/C270): 1.53

Picture Of Luminaire



Luminous Intensity Distribution Curve

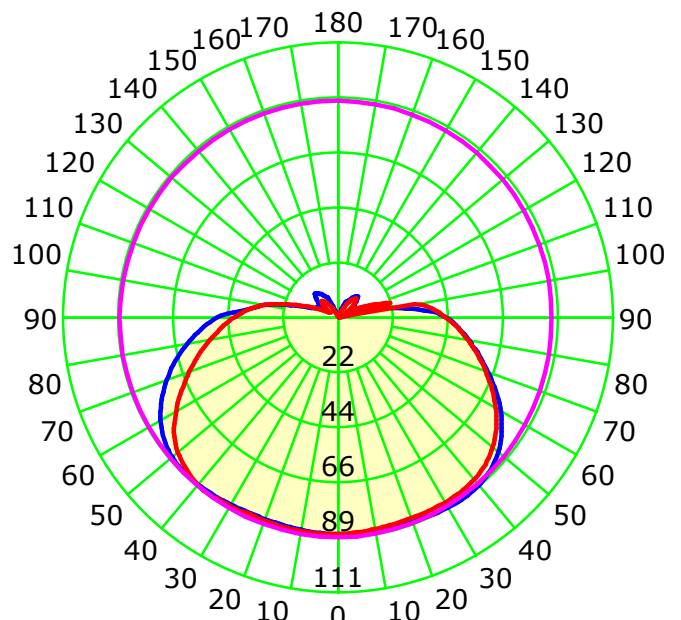

Unit: cd



Average Diffuse Angle(50%): 179.5°

— C0-C180 — C90-C270 — G35

C Plane (°):0.0-360.0: 45.0
Test Lab: Inventfine instrument
Test Type: TYPE C
Temperature: 26
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.508 m [K=1.0000]
Humidity: 65
Inspector:

Luminous Intensity Distribution Curve

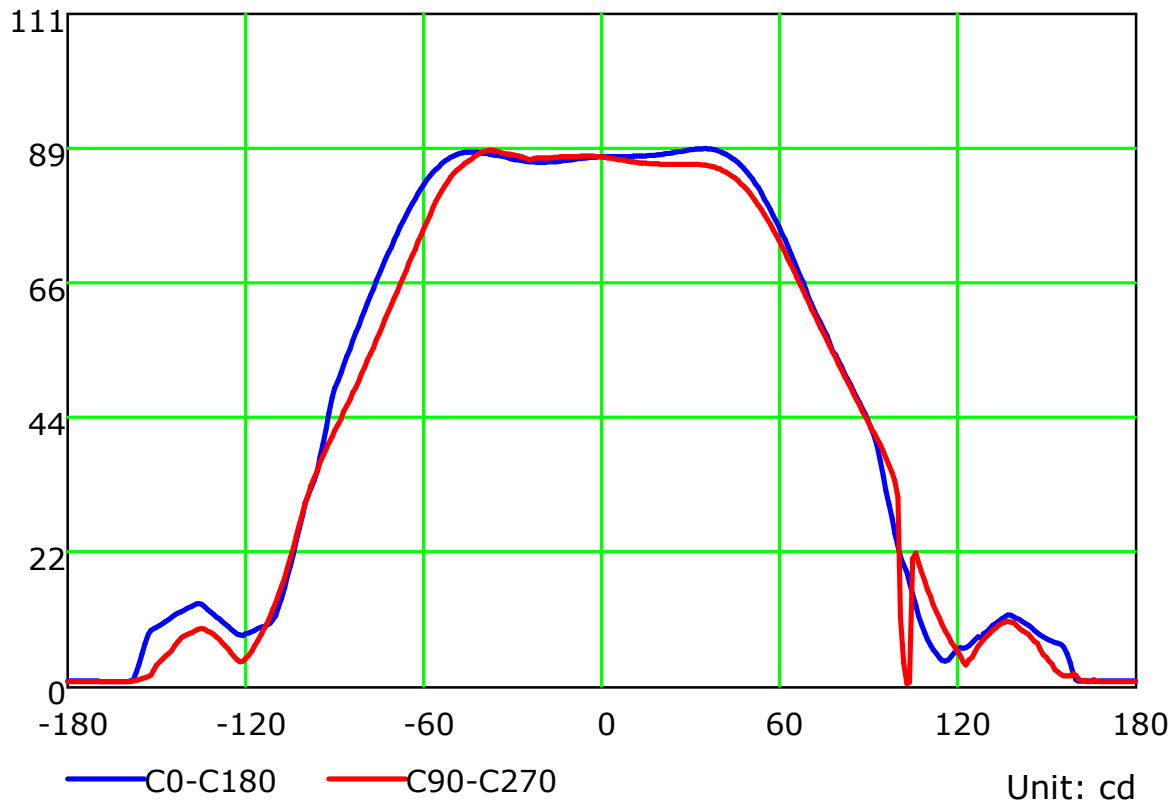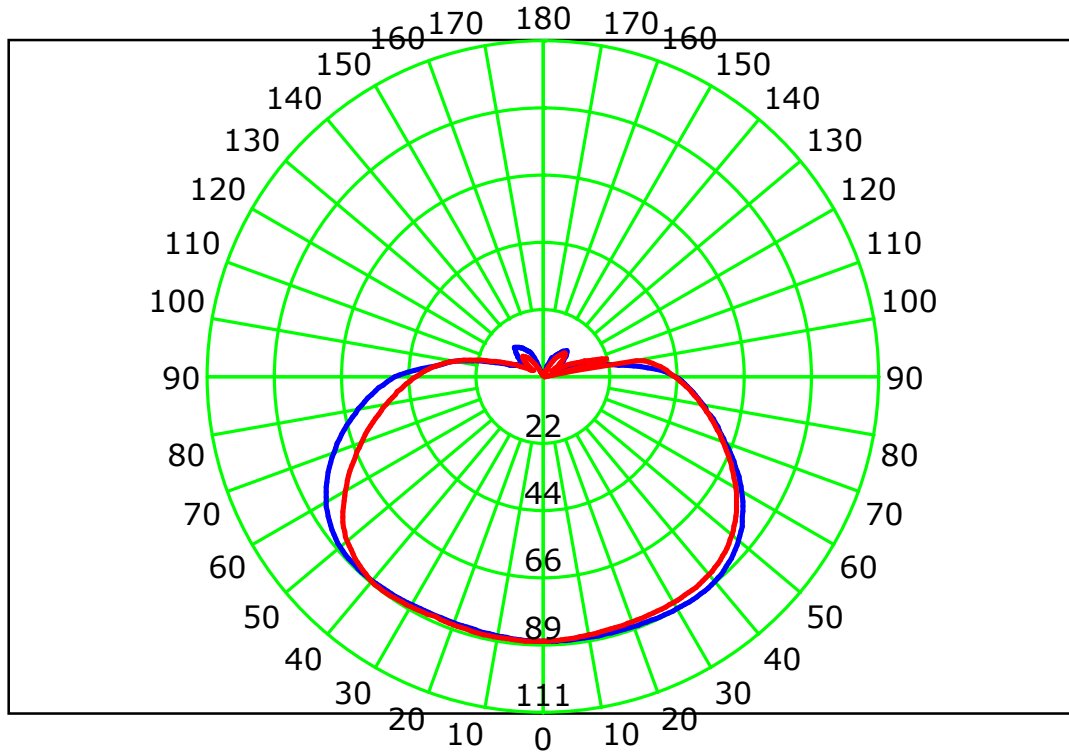


C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	1.15	1.15	1.15	1.15	1.11	1.11	1.11	1.11	1.02	1.02	1.02	0.94	0.94	0.94	0.87	0.87	0.87	0.84
1	1.00	0.94	0.88	0.82	0.96	0.90	0.84	0.79	0.82	0.78	0.74	0.75	0.72	0.69	0.69	0.66	0.64	0.60
2	0.89	0.79	0.71	0.63	0.85	0.76	0.68	0.61	0.69	0.63	0.57	0.63	0.58	0.53	0.58	0.54	0.50	0.47
3	0.80	0.68	0.58	0.50	0.76	0.65	0.56	0.49	0.59	0.52	0.46	0.54	0.48	0.43	0.50	0.45	0.40	0.37
4	0.73	0.59	0.49	0.41	0.69	0.57	0.47	0.40	0.52	0.44	0.38	0.48	0.41	0.35	0.43	0.38	0.33	0.30
5	0.67	0.52	0.42	0.35	0.63	0.50	0.41	0.34	0.46	0.38	0.32	0.42	0.35	0.30	0.39	0.33	0.28	0.25
6	0.61	0.46	0.37	0.30	0.58	0.45	0.35	0.29	0.41	0.33	0.27	0.38	0.31	0.26	0.35	0.29	0.24	0.22
7	0.56	0.42	0.32	0.26	0.54	0.40	0.31	0.25	0.37	0.29	0.24	0.34	0.27	0.22	0.31	0.25	0.21	0.19
8	0.52	0.38	0.29	0.22	0.50	0.36	0.28	0.22	0.34	0.26	0.21	0.31	0.24	0.20	0.29	0.23	0.18	0.16
9	0.49	0.34	0.26	0.20	0.46	0.33	0.25	0.19	0.31	0.23	0.18	0.28	0.22	0.17	0.26	0.21	0.16	0.14
10	0.45	0.32	0.23	0.18	0.43	0.30	0.23	0.17	0.28	0.21	0.16	0.26	0.20	0.16	0.24	0.19	0.15	0.13


Spacing Criteria (0-180): 1.55
 Spacing Criteria (90-270): 1.53
 Spacing Criteria (Diagonal): 1.71

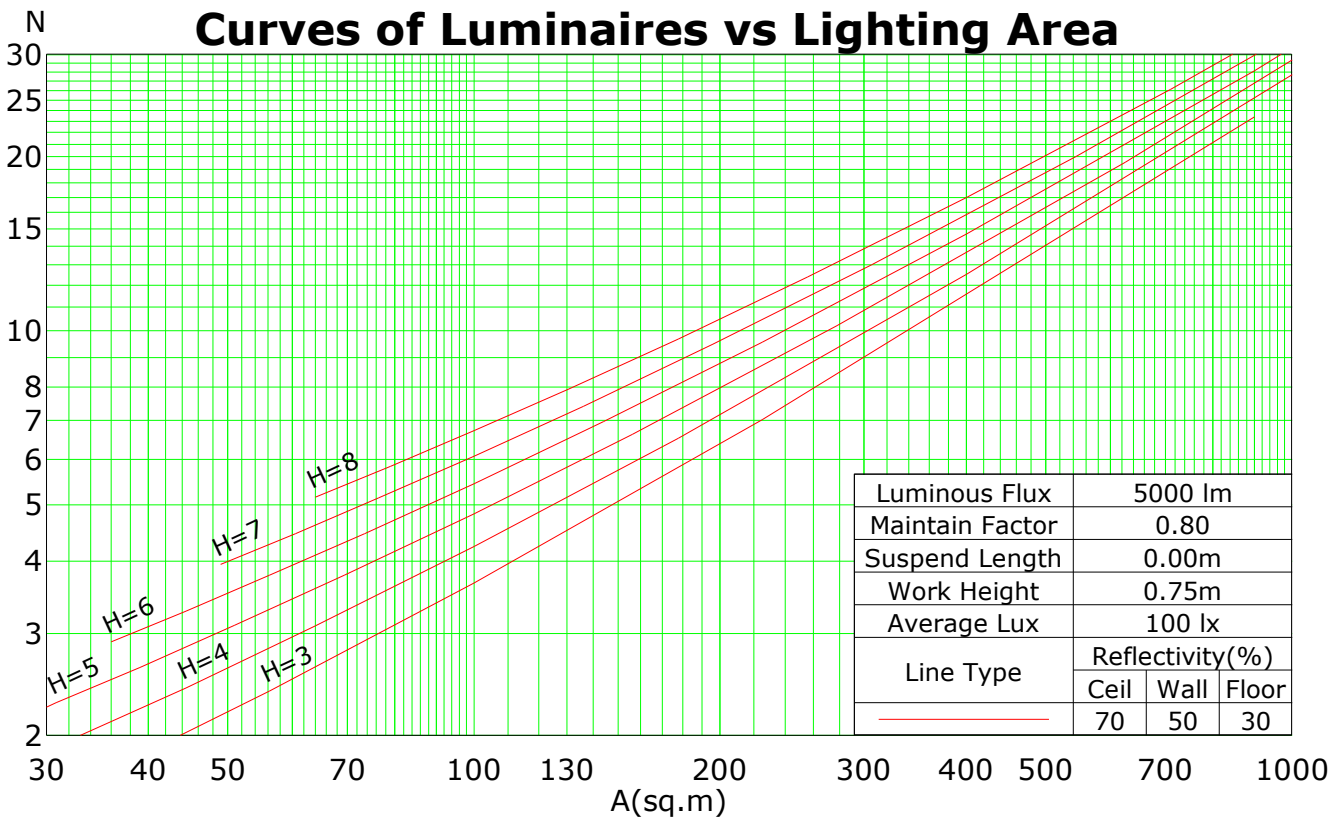

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Isocandela (rectangle)

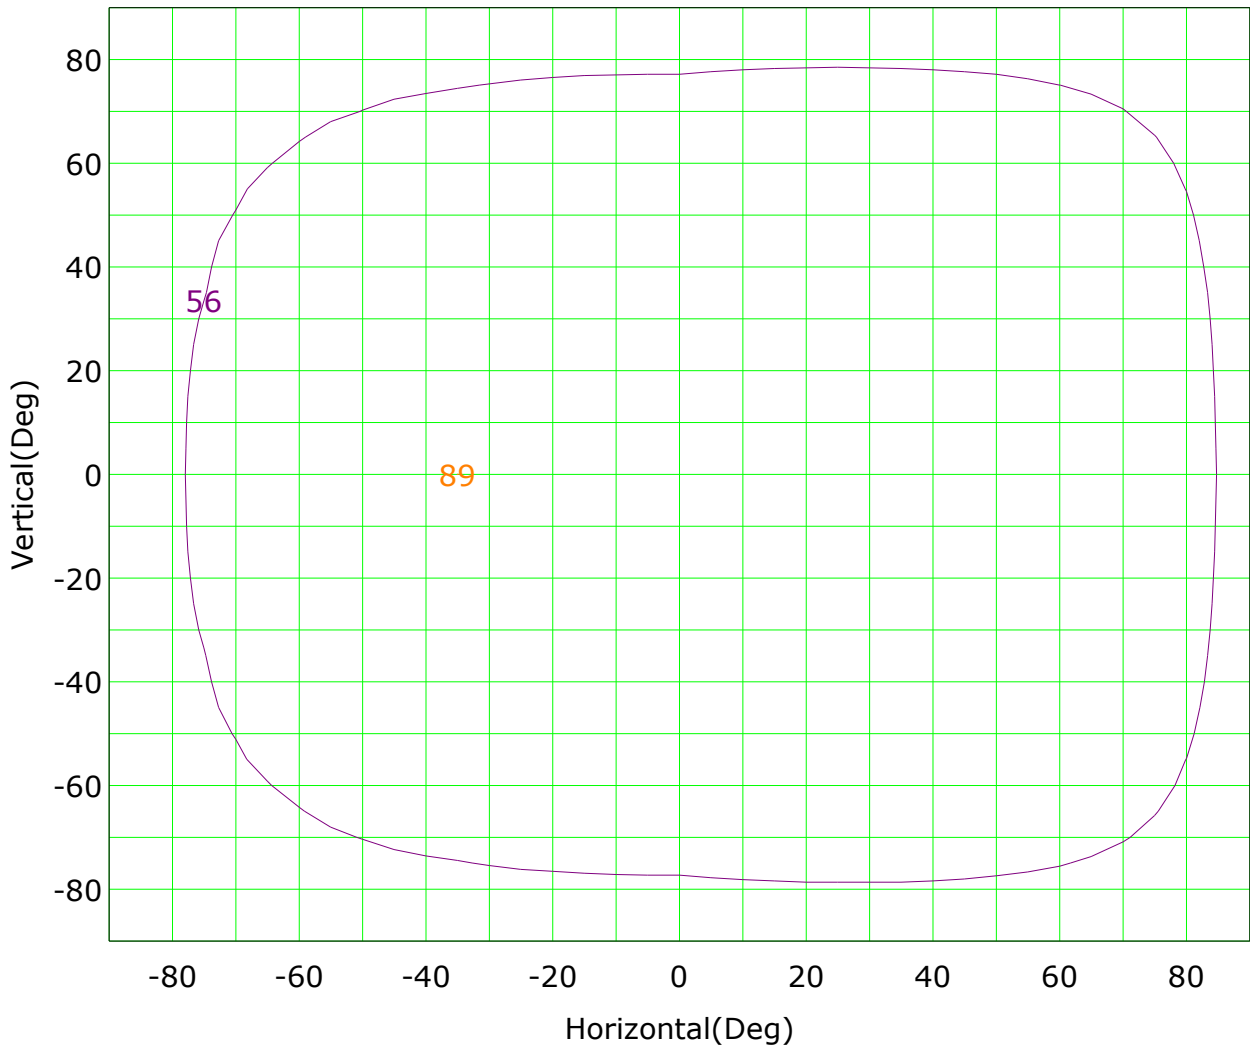


Imax (100%): 89 cd

— (10%):	9 cd	— (16%):	14 cd
— (25%):	22 cd	— (40%):	36 cd
— (63%):	56 cd	— (100%):	89 cd

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

IsoLux Plot

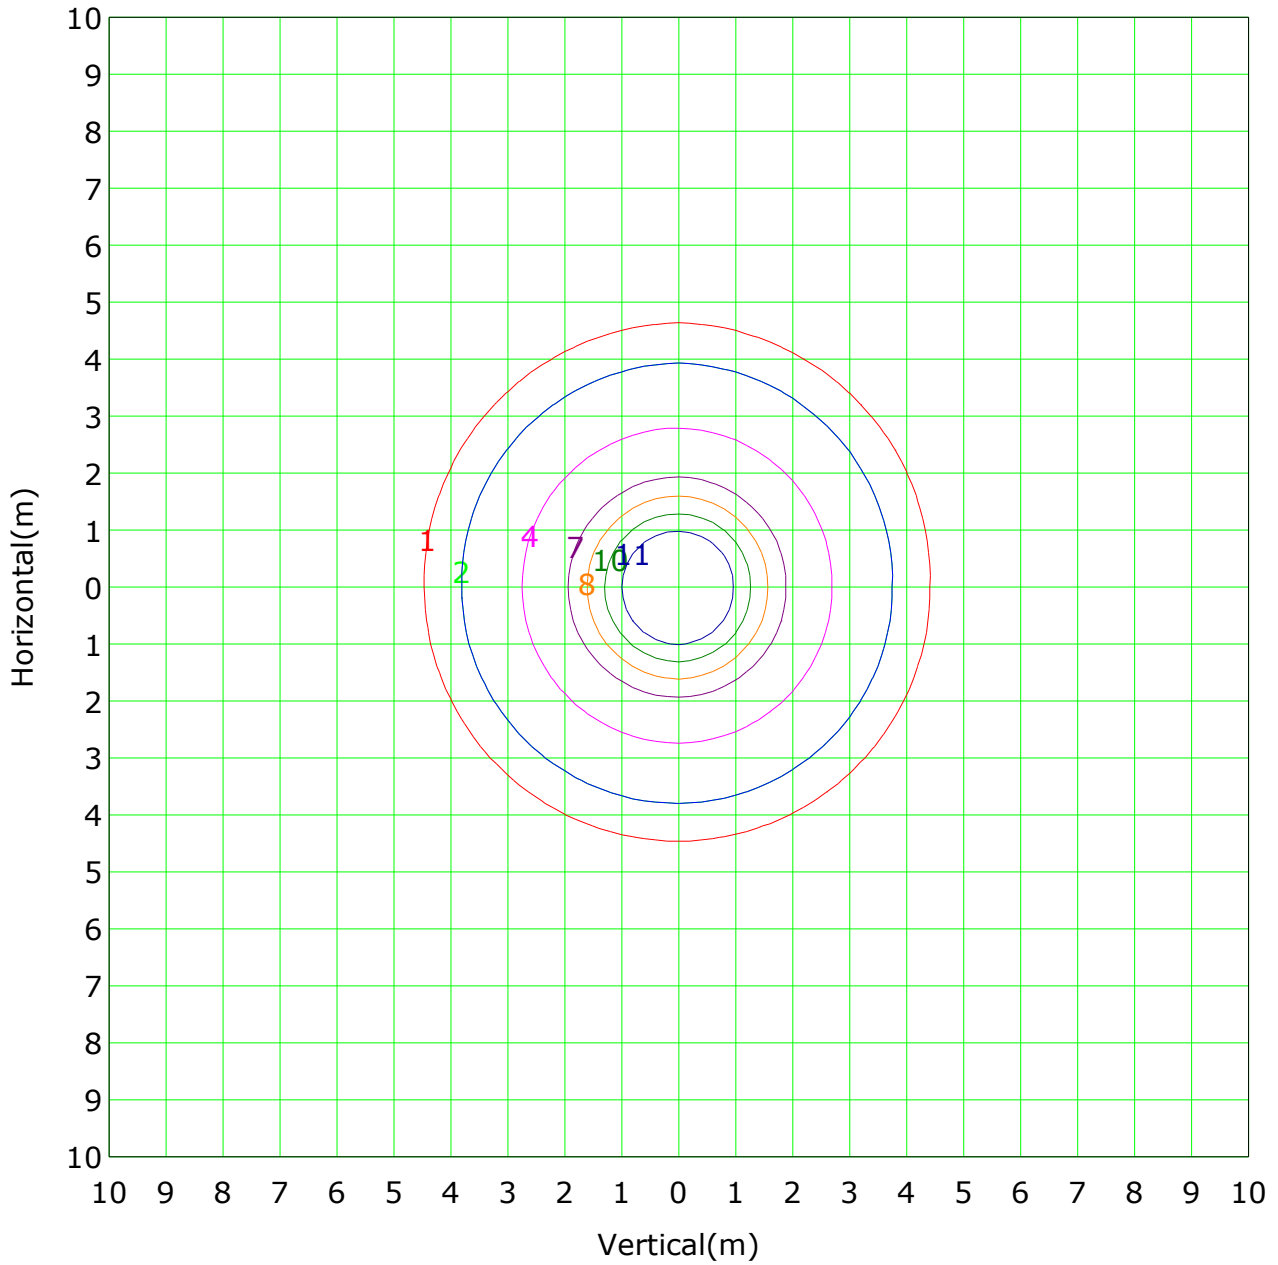

Mounting Height: 2.5m		Max Lux(100%): 14.1 lx
— (10%): 1.4 lx	— (15%): 2.1 lx	
— (15%): 2.1 lx	— (30%): 4.2 lx	
— (50%): 7.0 lx	— (60%): 8.4 lx	
— (70%): 9.8 lx	— (80%): 11.3 lx	



C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

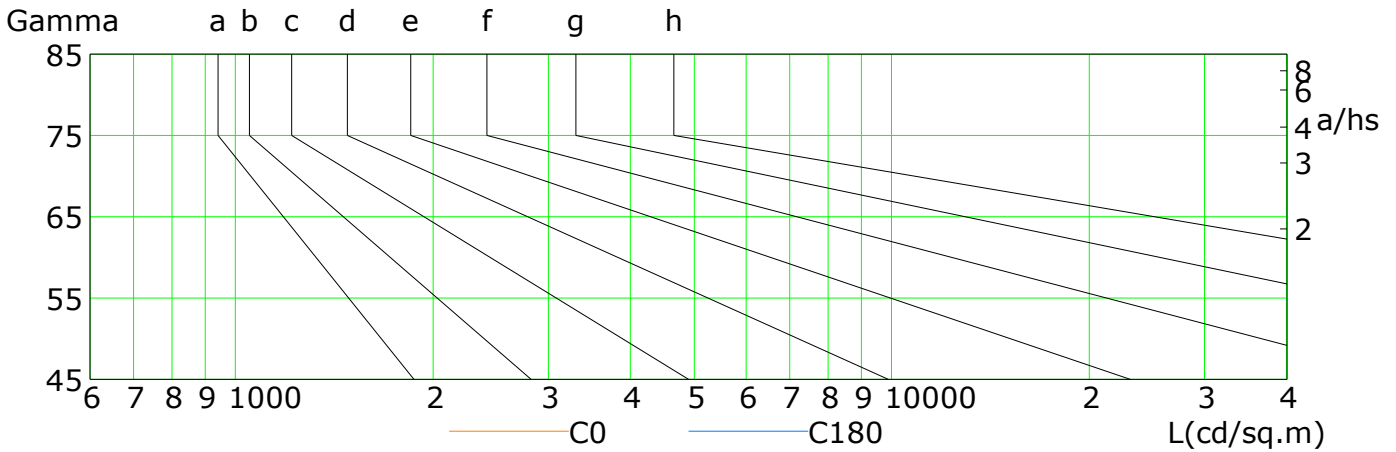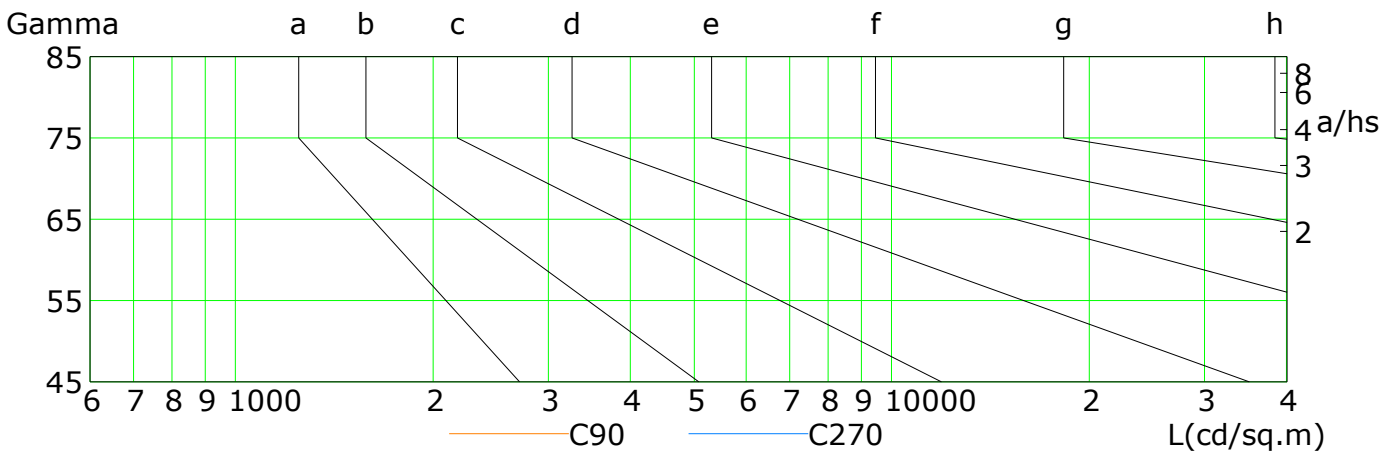


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	87	85	81	76	70	64	59	54	49
C90	84	82	78	74	69	64	59	54	49
C180	89	88	86	83	79	74	69	62	56
C270	87	85	81	76	70	64	59	53	48

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:


Illuminance at a Distance

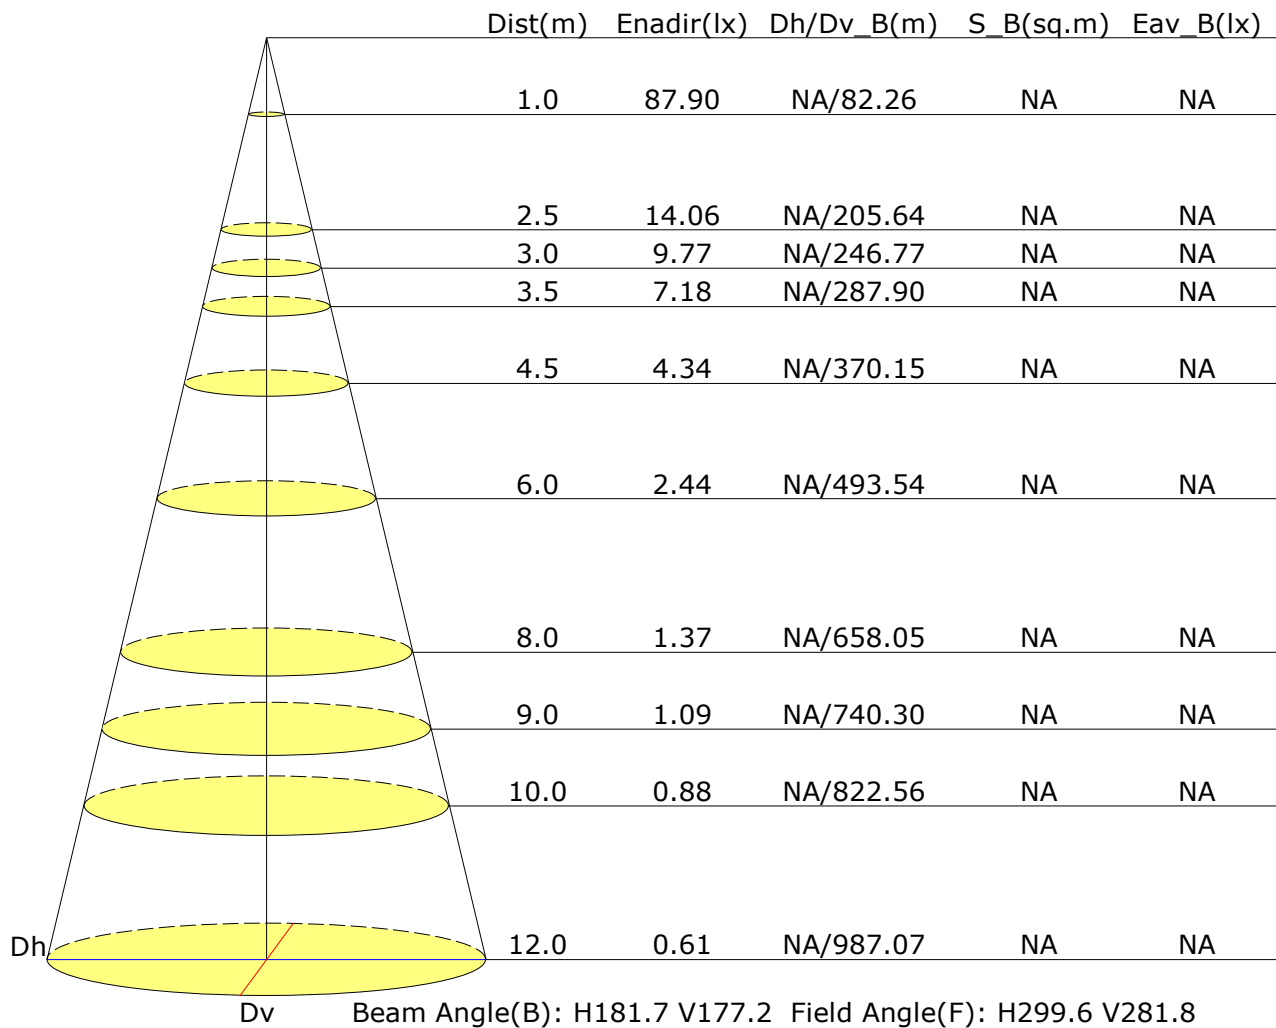

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Vertical IsoLux Plot

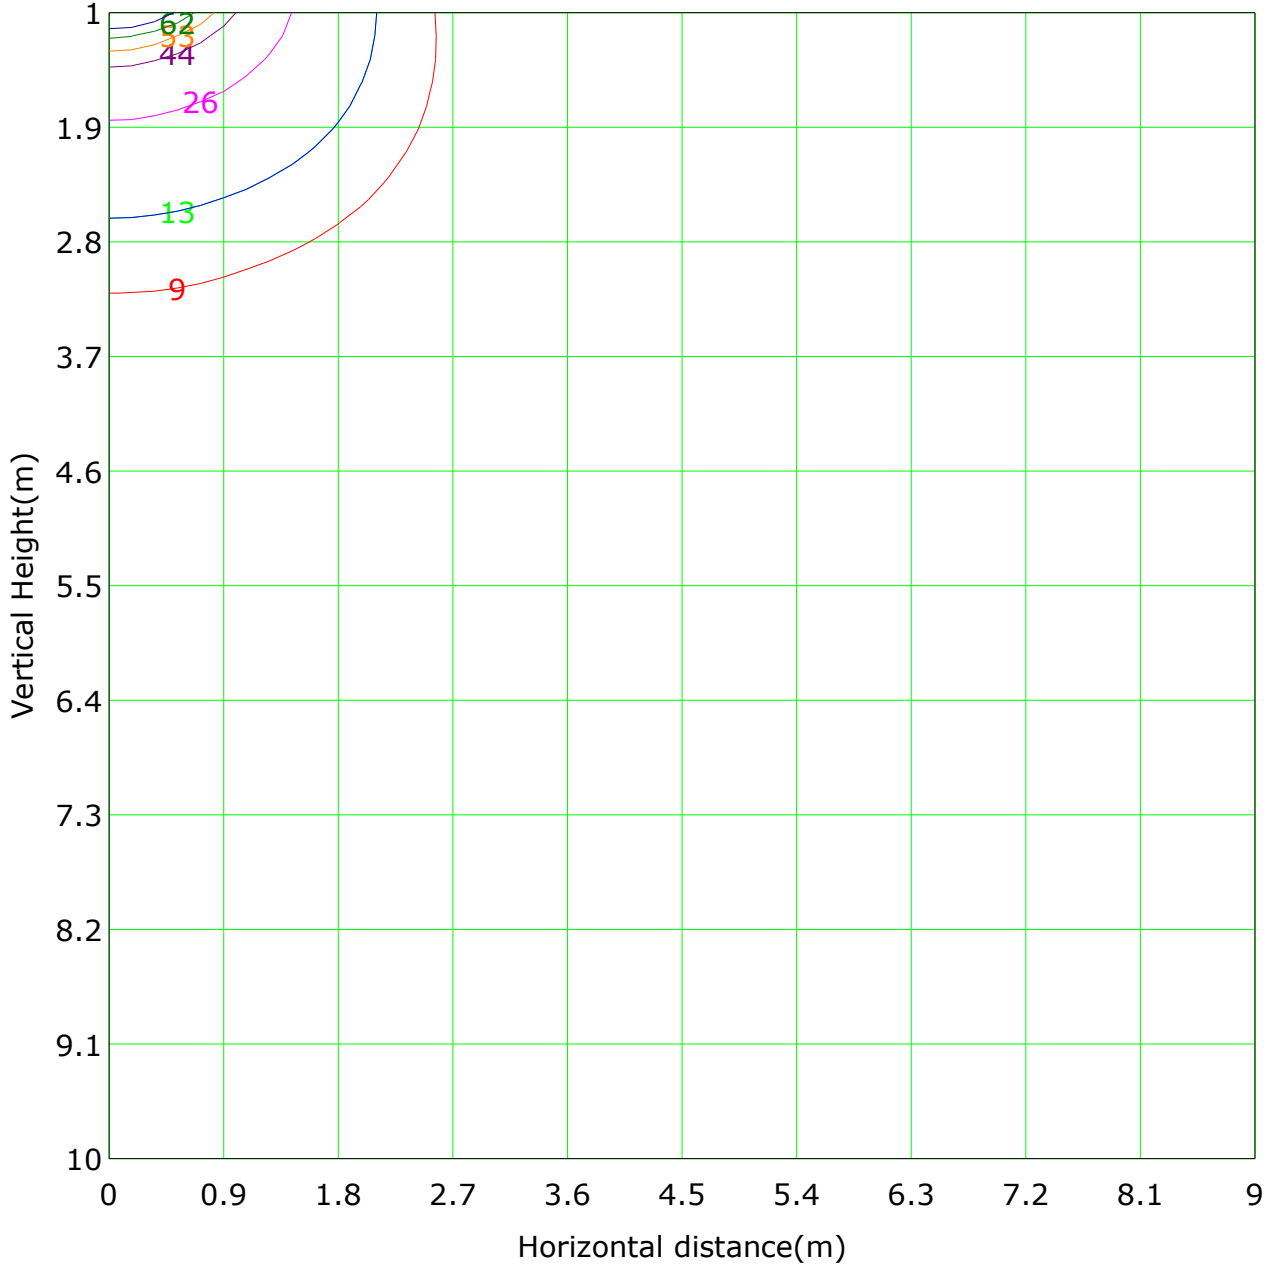


Lowest(m): 1.0m	Highest(m): 10.0m	Max Lux: 87.9 lx
— (10%): 8.8 lx	— (15%): 13.2 lx	— (30%): 26.4 lx
— (15%): 13.2 lx	— (50%): 43.9 lx	— (60%): 52.7 lx
— (50%): 43.9 lx	— (70%): 61.5 lx	— (80%): 70.3 lx

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

The Average Illuminance Effective Figure

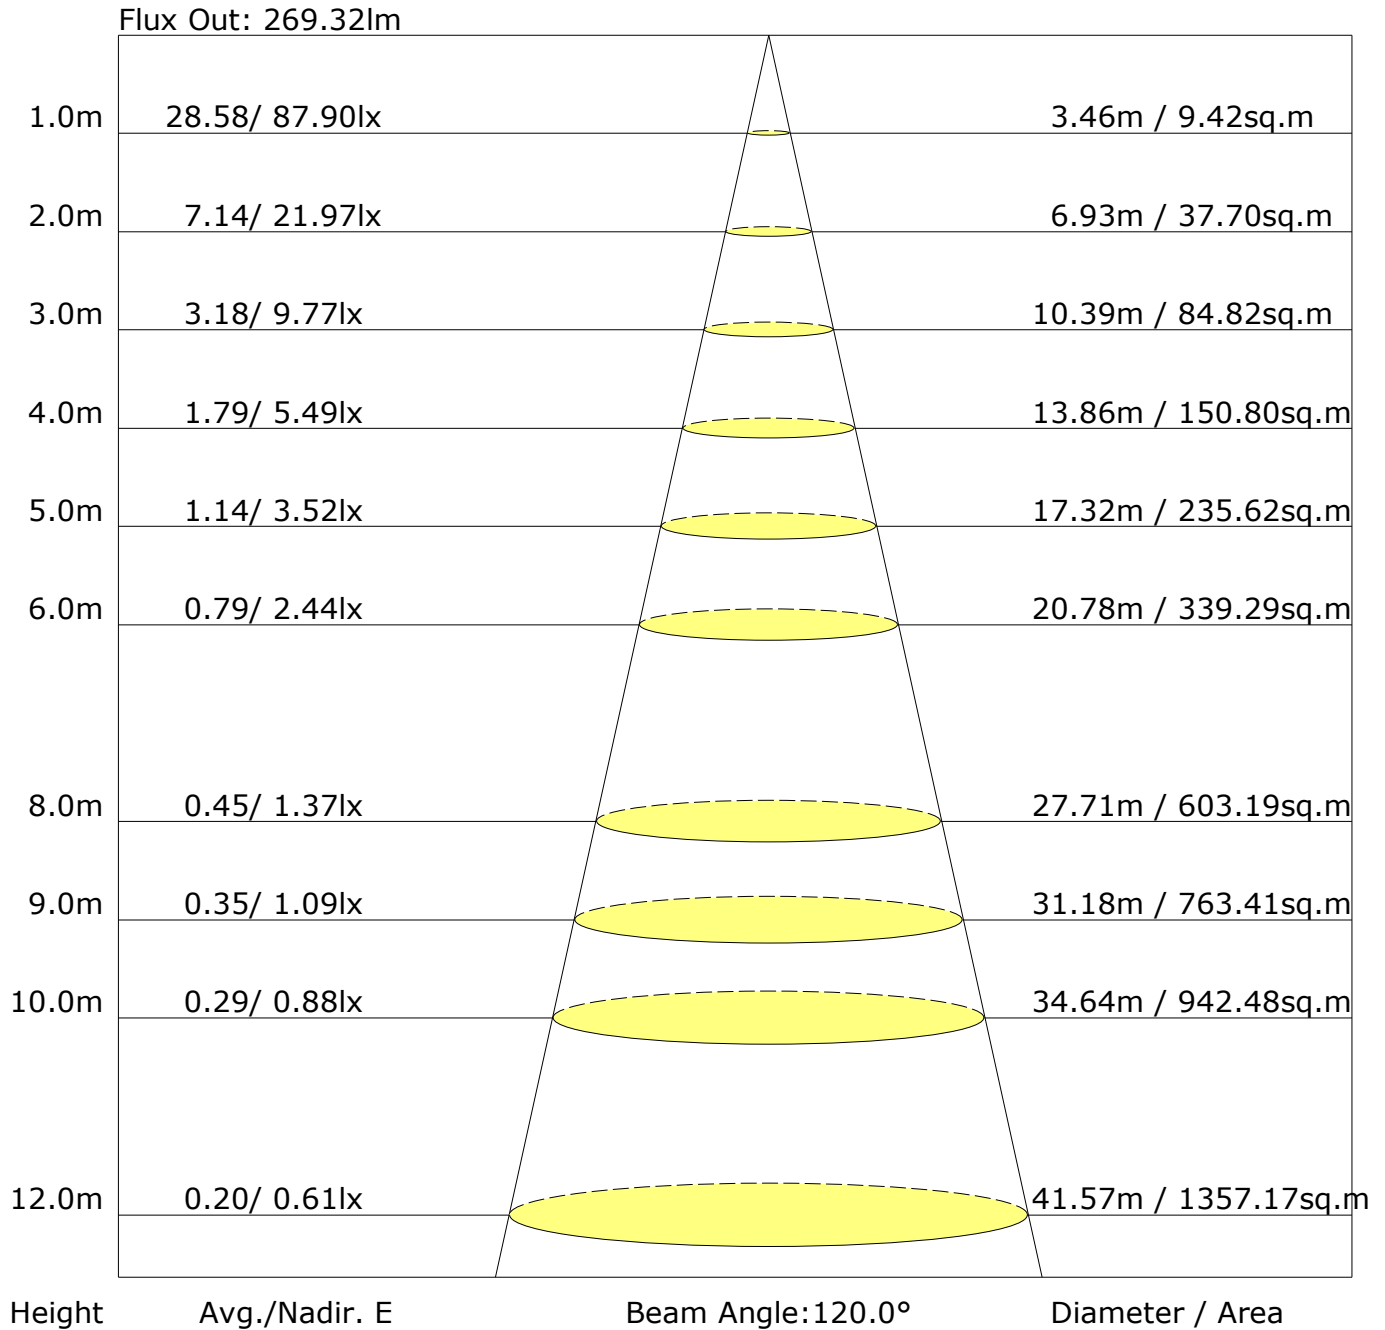

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=4H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=8H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=12H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
Variations with the observer position at spacings:										
S=1.0H										
S=1.5H										
S=2.0H										

Calculate in accordance with CIE Pub.117. The table is revised with 551lm ($8\log(F/F_0) = -2.1$).

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	87.9	0.1	0.1	0.02	0.02
1.0-2.0	87.9	0.3	0.3	0.05	0.06
2.0-3.0	87.9	0.4	0.8	0.08	0.14
3.0-4.0	87.9	0.6	1.3	0.11	0.24
4.0-5.0	87.8	0.8	2.1	0.14	0.38
5.0-6.0	87.8	0.9	3.0	0.17	0.55
6.0-7.0	87.8	1.1	4.1	0.20	0.75
7.0-8.0	87.7	1.3	5.4	0.23	0.97
8.0-9.0	87.7	1.4	6.8	0.26	1.23
9.0-10.0	87.6	1.6	8.4	0.29	1.52
10.0-11.0	87.6	1.8	10.1	0.32	1.84
11.0-12.0	87.6	1.9	12.0	0.35	2.18
12.0-13.0	87.5	2.1	14.1	0.38	2.56
13.0-14.0	87.5	2.2	16.4	0.41	2.97
14.0-15.0	87.5	2.4	18.8	0.44	3.40
15.0-16.0	87.5	2.6	21.3	0.47	3.87
16.0-17.0	87.4	2.7	24.0	0.49	4.36
17.0-18.0	87.4	2.9	26.9	0.52	4.89
18.0-19.0	87.4	3.0	30.0	0.55	5.44
19.0-20.0	87.4	3.2	33.2	0.58	6.02
20.0-21.0	87.4	3.4	36.5	0.61	6.63
21.0-22.0	87.4	3.5	40.0	0.64	7.27
22.0-23.0	87.5	3.7	43.7	0.67	7.93
23.0-24.0	87.4	3.8	47.5	0.69	8.62
24.0-25.0	87.5	4.0	51.5	0.72	9.35
25.0-26.0	87.5	4.1	55.6	0.75	10.10
26.0-27.0	87.6	4.3	59.9	0.78	10.87
27.0-28.0	87.7	4.4	64.4	0.81	11.68
28.0-29.0	87.8	4.6	69.0	0.83	12.51
29.0-30.0	87.8	4.7	73.7	0.86	13.37
30.0-31.0	87.9	4.9	78.6	0.89	14.26
31.0-32.0	88.0	5.0	83.6	0.91	15.18
32.0-33.0	88.0	5.2	88.8	0.94	16.12
33.0-34.0	88.1	5.3	94.2	0.97	17.08
34.0-35.0	88.1	5.5	99.6	0.99	18.08
35.0-36.0	88.2	5.6	105.3	1.02	19.10

C Plane (°):0.0-360.0: 45.0
Test Lab: Inventfine instrument
Test Type: TYPE C
Temperature: 26
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.508 m [K=1.0000]
Humidity: 65
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	88.2	5.8	111.0	1.04	20.14
37.0-38.0	88.2	5.9	116.9	1.07	21.21
38.0-39.0	88.1	6.0	122.9	1.09	22.30
39.0-40.0	88.0	6.1	129.0	1.11	23.41
40.0-41.0	87.9	6.3	135.3	1.14	24.55
41.0-42.0	87.8	6.4	141.7	1.16	25.71
42.0-43.0	87.6	6.5	148.2	1.18	26.88
43.0-44.0	87.3	6.6	154.8	1.20	28.08
44.0-45.0	87.0	6.7	161.5	1.21	29.29
45.0-46.0	86.8	6.8	168.2	1.23	30.53
46.0-47.0	86.4	6.9	175.1	1.25	31.77
47.0-48.0	86.1	7.0	182.1	1.26	33.04
48.0-49.0	85.7	7.0	189.1	1.28	34.31
49.0-50.0	85.2	7.1	196.2	1.29	35.60
50.0-51.0	84.7	7.2	203.4	1.30	36.90
51.0-52.0	84.2	7.2	210.6	1.31	38.21
52.0-53.0	83.5	7.3	217.9	1.32	39.53
53.0-54.0	82.9	7.3	225.2	1.33	40.86
54.0-55.0	82.1	7.3	232.5	1.33	42.19
55.0-56.0	81.4	7.4	239.9	1.33	43.52
56.0-57.0	80.5	7.4	247.2	1.34	44.86
57.0-58.0	79.7	7.4	254.6	1.34	46.19
58.0-59.0	78.8	7.4	262.0	1.34	47.53
59.0-60.0	77.8	7.4	269.3	1.33	48.86
60.0-61.0	76.8	7.3	276.6	1.33	50.20
61.0-62.0	75.9	7.3	284.0	1.33	51.52
62.0-63.0	74.9	7.3	291.2	1.32	52.84
63.0-64.0	73.8	7.2	298.5	1.31	54.16
64.0-65.0	72.8	7.2	305.7	1.31	55.46
65.0-66.0	71.7	7.2	312.8	1.30	56.76
66.0-67.0	70.6	7.1	319.9	1.29	58.05
67.0-68.0	69.5	7.0	327.0	1.28	59.33
68.0-69.0	68.4	7.0	334.0	1.27	60.59
69.0-70.0	67.2	6.9	340.9	1.25	61.84
70.0-71.0	66.1	6.8	347.7	1.24	63.09
71.0-72.0	65.1	6.8	354.5	1.23	64.31

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	64.0	6.7	361.2	1.21	65.53
73.0-74.0	62.9	6.6	367.8	1.20	66.73
74.0-75.0	61.8	6.5	374.3	1.19	67.91
75.0-76.0	60.7	6.4	380.7	1.17	69.08
76.0-77.0	59.6	6.4	387.1	1.15	70.23
77.0-78.0	58.4	6.3	393.3	1.13	71.37
78.0-79.0	57.3	6.2	399.5	1.12	72.49
79.0-80.0	56.3	6.1	405.6	1.10	73.59
80.0-81.0	55.2	6.0	411.5	1.08	74.67
81.0-82.0	54.1	5.9	417.4	1.06	75.74
82.0-83.0	53.0	5.8	423.2	1.05	76.78
83.0-84.0	52.0	5.7	428.8	1.03	77.81
84.0-85.0	50.9	5.6	434.4	1.01	78.82
85.0-86.0	49.8	5.4	439.8	0.99	79.80
86.0-87.0	48.7	5.3	445.2	0.97	80.77
87.0-88.0	47.7	5.2	450.4	0.95	81.72
88.0-89.0	46.5	5.1	455.5	0.93	82.65
89.0-90.0	45.5	5.0	460.5	0.90	83.55
90.0-91.0	44.3	4.9	465.3	0.88	84.43
91.0-92.0	43.0	4.7	470.1	0.86	85.29
92.0-93.0	41.6	4.6	474.6	0.83	86.11
93.0-94.0	40.0	4.4	479.0	0.79	86.91
94.0-95.0	38.2	4.2	483.2	0.76	87.67
95.0-96.0	36.4	4.0	487.2	0.72	88.39
96.0-97.0	34.7	3.8	490.9	0.69	89.07
97.0-98.0	33.2	3.6	494.5	0.65	89.73
98.0-99.0	31.6	3.4	498.0	0.62	90.35
99.0-100.0	29.9	3.2	501.2	0.59	90.94
100.0-101.0	25.7	2.8	504.0	0.50	91.44
101.0-102.0	20.9	2.2	506.2	0.41	91.85
102.0-103.0	18.2	2.0	508.2	0.35	92.20
103.0-104.0	16.5	1.8	509.9	0.32	92.52
104.0-105.0	17.6	1.9	511.8	0.34	92.86
105.0-106.0	18.9	2.0	513.8	0.36	93.22
106.0-107.0	17.5	1.8	515.6	0.33	93.56
107.0-108.0	15.9	1.7	517.3	0.30	93.86

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	14.4	1.5	518.8	0.27	94.13
109.0-110.0	13.0	1.3	520.1	0.24	94.37
110.0-111.0	11.9	1.2	521.4	0.22	94.60
111.0-112.0	10.9	1.1	522.5	0.20	94.80
112.0-113.0	10.0	1.0	523.5	0.18	94.98
113.0-114.0	9.2	0.9	524.4	0.17	95.15
114.0-115.0	8.5	0.9	525.3	0.15	95.30
115.0-116.0	7.9	0.8	526.1	0.14	95.45
116.0-117.0	7.4	0.7	526.8	0.13	95.58
117.0-118.0	7.0	0.7	527.5	0.12	95.70
118.0-119.0	6.7	0.6	528.1	0.12	95.82
119.0-120.0	6.4	0.6	528.7	0.11	95.93
120.0-121.0	6.2	0.6	529.3	0.11	96.04
121.0-122.0	5.9	0.6	529.9	0.10	96.14
122.0-123.0	5.8	0.5	530.4	0.10	96.23
123.0-124.0	6.0	0.6	530.9	0.10	96.33
124.0-125.0	6.6	0.6	531.5	0.11	96.44
125.0-126.0	7.1	0.6	532.2	0.11	96.56
126.0-127.0	7.7	0.7	532.8	0.12	96.68
127.0-128.0	8.2	0.7	533.6	0.13	96.81
128.0-129.0	8.6	0.7	534.3	0.13	96.94
129.0-130.0	9.1	0.8	535.1	0.14	97.08
130.0-131.0	9.5	0.8	535.9	0.14	97.23
131.0-132.0	10.0	0.8	536.7	0.15	97.37
132.0-133.0	10.4	0.8	537.5	0.15	97.53
133.0-134.0	10.7	0.9	538.4	0.15	97.68
134.0-135.0	11.1	0.9	539.2	0.16	97.84
135.0-136.0	11.3	0.9	540.1	0.16	98.00
136.0-137.0	11.4	0.9	541.0	0.16	98.15
137.0-138.0	11.3	0.8	541.8	0.15	98.30
138.0-139.0	11.1	0.8	542.6	0.15	98.45
139.0-140.0	10.9	0.8	543.4	0.14	98.59
140.0-141.0	10.6	0.7	544.1	0.13	98.72
141.0-142.0	10.3	0.7	544.8	0.13	98.85
142.0-143.0	9.9	0.7	545.5	0.12	98.97
143.0-144.0	9.6	0.6	546.1	0.11	99.08

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	9.1	0.6	546.7	0.11	99.19
145.0-146.0	8.6	0.5	547.2	0.10	99.29
146.0-147.0	8.2	0.5	547.7	0.09	99.38
147.0-148.0	7.7	0.5	548.2	0.08	99.46
148.0-149.0	7.2	0.4	548.6	0.07	99.53
149.0-150.0	6.7	0.4	549.0	0.07	99.60
150.0-151.0	6.3	0.3	549.3	0.06	99.66
151.0-152.0	5.8	0.3	549.6	0.06	99.72
152.0-153.0	5.3	0.3	549.9	0.05	99.77
153.0-154.0	4.8	0.2	550.1	0.04	99.81
154.0-155.0	4.2	0.2	550.3	0.04	99.85
155.0-156.0	3.6	0.2	550.5	0.03	99.88
156.0-157.0	3.0	0.1	550.6	0.02	99.90
157.0-158.0	2.3	0.1	550.7	0.02	99.92
158.0-159.0	1.7	0.1	550.8	0.01	99.93
159.0-160.0	1.3	0.1	550.8	0.01	99.94
160.0-161.0	1.0	0.0	550.9	0.01	99.95
161.0-162.0	0.9	0.0	550.9	0.01	99.95
162.0-163.0	0.9	0.0	550.9	0.01	99.96
163.0-164.0	0.9	0.0	550.9	0.00	99.96
164.0-165.0	0.8	0.0	551.0	0.00	99.97
165.0-166.0	0.9	0.0	551.0	0.00	99.97
166.0-167.0	0.9	0.0	551.0	0.00	99.98
167.0-168.0	0.8	0.0	551.0	0.00	99.98
168.0-169.0	0.8	0.0	551.1	0.00	99.98
169.0-170.0	0.8	0.0	551.1	0.00	99.99
170.0-171.0	0.8	0.0	551.1	0.00	99.99
171.0-172.0	0.8	0.0	551.1	0.00	99.99
172.0-173.0	0.9	0.0	551.1	0.00	99.99
173.0-174.0	0.9	0.0	551.1	0.00	99.99
174.0-175.0	0.9	0.0	551.1	0.00	100.00
175.0-176.0	0.9	0.0	551.1	0.00	100.00
176.0-177.0	0.9	0.0	551.1	0.00	100.00
177.0-178.0	0.9	0.0	551.1	0.00	100.00
178.0-179.0	0.9	0.0	551.1	0.00	100.00
179.0-180.0	0.9	0.0	551.2	0.00	100.00

C Plane (°):0.0-360.0: 45.0
Test Lab: Inventfine instrument
Test Type: TYPE C
Temperature: 26
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.508 m [K=1.0000]
Humidity: 65
Inspector:

Zonal Lumen (Continue 5)

cone flux(90°): 161.45 lm

%lum = 29.3%

%lamp = 29.3%

cone flux(120°): 269.32 lm

%lum = 48.9%

%lamp = 48.9%

Candlepower Table

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G0.0	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	
G1.0	87.9	87.9	87.8	87.9	87.9	87.9	87.9	87.9	87.9	
G2.0	87.9	87.8	87.8	87.8	87.9	87.9	88.0	88.0	87.9	
G3.0	87.9	87.8	87.7	87.8	87.8	87.9	88.0	88.0	87.9	
G4.0	87.9	87.8	87.6	87.7	87.8	87.9	88.0	88.0	87.9	
G5.0	87.9	87.7	87.5	87.6	87.7	87.9	88.0	88.0	87.9	
G6.0	88.0	87.7	87.4	87.6	87.7	87.9	88.0	88.0	88.0	
G7.0	87.9	87.6	87.4	87.5	87.6	87.8	88.0	88.0	87.9	
G8.0	87.9	87.6	87.3	87.4	87.6	87.8	88.0	88.0	87.9	
G9.0	88.0	87.6	87.2	87.3	87.5	87.7	88.0	88.0	88.0	
G10.0	88.0	87.5	87.1	87.3	87.4	87.7	88.0	88.0	88.0	
G11.0	88.0	87.5	87.0	87.2	87.4	87.7	87.9	88.0	88.0	
G12.0	88.0	87.5	87.0	87.1	87.3	87.6	87.9	88.0	88.0	
G13.0	88.0	87.5	86.9	87.1	87.3	87.6	87.9	88.0	88.0	
G14.0	88.0	87.4	86.8	87.0	87.2	87.5	87.9	88.0	88.0	
G15.0	88.1	87.4	86.8	87.0	87.1	87.5	87.9	88.0	88.1	
G16.0	88.1	87.4	86.8	86.9	87.1	87.4	87.8	87.9	88.1	
G17.0	88.1	87.4	86.8	86.9	87.1	87.4	87.7	87.9	88.1	
G18.0	88.2	87.4	86.7	86.9	87.1	87.4	87.7	87.9	88.2	
G19.0	88.2	87.5	86.7	86.9	87.0	87.4	87.7	88.0	88.2	
G20.0	88.3	87.5	86.7	86.8	87.0	87.4	87.7	88.0	88.3	
G21.0	88.4	87.5	86.7	86.8	87.0	87.4	87.7	88.0	88.4	
G22.0	88.4	87.5	86.7	86.8	87.0	87.4	87.7	88.1	88.4	
G23.0	88.5	87.6	86.7	86.9	87.0	87.3	87.6	88.0	88.5	
G24.0	88.6	87.6	86.7	86.9	87.1	87.2	87.4	88.0	88.6	
G25.0	88.7	87.7	86.7	86.9	87.1	87.3	87.5	88.1	88.7	
G26.0	88.7	87.7	86.7	86.9	87.2	87.5	87.8	88.3	88.7	
G27.0	88.8	87.7	86.7	87.0	87.2	87.6	87.9	88.4	88.8	
G28.0	88.9	87.8	86.7	87.0	87.3	87.7	88.1	88.5	88.9	
G29.0	89.0	87.8	86.7	87.1	87.4	87.8	88.1	88.6	89.0	
G30.0	89.1	87.9	86.7	87.1	87.5	87.9	88.2	88.6	89.1	
G31.0	89.1	87.9	86.7	87.2	87.6	88.0	88.3	88.7	89.1	
G32.0	89.2	87.9	86.7	87.2	87.8	88.1	88.4	88.8	89.2	
G33.0	89.2	87.9	86.6	87.3	87.9	88.2	88.5	88.8	89.2	
G34.0	89.2	87.9	86.6	87.3	88.0	88.3	88.6	88.9	89.2	
G35.0	89.3	87.9	86.5	87.3	88.1	88.4	88.7	89.0	89.3	
G36.0	89.2	87.8	86.4	87.3	88.2	88.6	88.9	89.1	89.2	

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G37.0	89.2	87.8	86.4	87.3	88.3	88.6	89.0	89.1	89.2	
G38.0	89.1	87.7	86.2	87.3	88.3	88.7	89.0	89.0	89.1	
G39.0	89.0	87.5	86.0	87.2	88.4	88.7	88.9	88.9	89.0	
G40.0	88.8	87.3	85.9	87.2	88.5	88.6	88.8	88.8	88.8	
G41.0	88.6	87.1	85.6	87.1	88.6	88.6	88.6	88.6	88.6	
G42.0	88.4	86.9	85.4	87.0	88.6	88.5	88.3	88.3	88.4	
G43.0	88.1	86.6	85.1	86.9	88.7	88.3	87.9	88.0	88.1	
G44.0	87.7	86.3	84.8	86.7	88.7	88.1	87.5	87.6	87.7	
G45.0	87.4	85.9	84.4	86.5	88.7	87.9	87.2	87.3	87.4	
G46.0	86.9	85.4	83.9	86.3	88.6	87.8	86.9	86.9	86.9	
G47.0	86.5	85.0	83.5	86.0	88.5	87.5	86.5	86.5	86.5	
G48.0	86.0	84.5	83.0	85.7	88.4	87.2	86.0	86.0	86.0	
G49.0	85.4	84.0	82.5	85.4	88.3	86.9	85.6	85.5	85.4	
G50.0	84.8	83.4	81.9	85.0	88.1	86.6	85.1	85.0	84.8	
G51.0	84.2	82.7	81.2	84.5	87.8	86.2	84.5	84.4	84.2	
G52.0	83.5	82.0	80.6	84.0	87.5	85.7	83.8	83.7	83.5	
G53.0	82.8	81.3	79.9	83.5	87.2	85.1	83.1	82.9	82.8	
G54.0	81.9	80.5	79.2	82.9	86.7	84.5	82.2	82.1	81.9	
G55.0	80.9	79.7	78.4	82.3	86.3	83.8	81.4	81.2	80.9	
G56.0	80.1	78.8	77.5	81.7	85.8	83.1	80.5	80.3	80.1	
G57.0	79.1	77.9	76.7	81.0	85.3	82.3	79.3	79.2	79.1	
G58.0	78.2	77.0	75.8	80.3	84.7	81.4	78.2	78.2	78.2	
G59.0	77.2	76.1	74.9	79.5	84.1	80.6	77.1	77.2	77.2	
G60.0	76.2	75.0	73.9	78.6	83.3	79.6	75.9	76.1	76.2	
G61.0	75.1	74.0	72.9	77.8	82.6	78.7	74.8	75.0	75.1	
G62.0	74.1	73.0	71.9	76.8	81.7	77.7	73.8	73.9	74.1	
G63.0	73.0	72.0	70.9	75.9	80.9	76.7	72.6	72.8	73.0	
G64.0	71.8	70.9	69.9	75.0	80.1	75.7	71.4	71.6	71.8	
G65.0	70.5	69.7	68.9	74.0	79.1	74.7	70.3	70.4	70.5	
G66.0	69.5	68.7	67.9	73.1	78.2	73.6	69.0	69.2	69.5	
G67.0	68.1	67.5	66.8	72.0	77.2	72.5	67.9	68.0	68.1	
G68.0	67.1	66.4	65.8	71.0	76.2	71.5	66.7	66.9	67.1	
G69.0	65.9	65.3	64.7	69.9	75.1	70.3	65.5	65.7	65.9	
G70.0	64.4	64.0	63.7	68.9	74.1	69.2	64.4	64.4	64.4	
G71.0	63.5	63.1	62.7	67.8	72.9	68.1	63.3	63.4	63.5	
G72.0	62.2	62.0	61.7	66.8	72.0	67.1	62.2	62.2	62.2	
G73.0	61.2	60.9	60.6	65.7	70.8	65.9	61.0	61.1	61.2	

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G74.0	60.4	60.0	59.6	64.7	69.8	64.8	59.9	60.1	60.4	
G75.0	59.3	58.9	58.6	63.6	68.5	63.6	58.6	58.9	59.3	
G76.0	58.3	57.9	57.6	62.4	67.3	62.4	57.5	57.9	58.3	
G77.0	57.1	56.8	56.6	61.3	66.1	61.2	56.3	56.7	57.1	
G78.0	55.6	55.6	55.6	60.2	64.8	60.0	55.2	55.4	55.6	
G79.0	55.0	54.8	54.6	59.1	63.6	58.9	54.2	54.6	55.0	
G80.0	54.1	53.8	53.5	57.9	62.4	57.7	53.0	53.5	54.1	
G81.0	53.1	52.8	52.5	56.8	61.1	56.5	51.9	52.5	53.1	
G82.0	52.0	51.8	51.6	55.7	59.9	55.3	50.7	51.4	52.0	
G83.0	51.1	50.9	50.6	54.7	58.7	54.1	49.6	50.4	51.1	
G84.0	50.1	49.9	49.7	53.5	57.3	53.0	48.7	49.4	50.1	
G85.0	49.1	48.9	48.7	52.3	55.9	51.7	47.6	48.3	49.1	
G86.0	48.1	47.9	47.6	51.2	54.8	50.7	46.6	47.3	48.1	
G87.0	47.2	46.9	46.7	50.0	53.3	49.5	45.6	46.4	47.2	
G88.0	46.2	46.0	45.7	48.9	52.1	48.2	44.4	45.3	46.2	
G89.0	45.2	45.0	44.8	47.7	50.7	47.0	43.4	44.3	45.2	
G90.0	44.0	43.9	43.8	46.7	49.5	46.0	42.4	43.2	44.0	
G91.0	42.9	42.9	42.8	45.3	47.8	44.6	41.4	42.2	42.9	
G92.0	41.5	41.8	42.0	43.6	45.3	42.9	40.5	41.0	41.5	
G93.0	40.1	40.6	41.2	42.0	42.8	41.1	39.5	39.8	40.1	
G94.0	37.7	38.9	40.2	40.3	40.3	39.3	38.3	38.0	37.7	
G95.0	35.0	37.0	39.1	38.5	38.0	37.5	37.1	36.0	35.0	
G96.0	32.6	35.3	37.9	36.9	35.8	35.8	35.8	34.2	32.6	
G97.0	30.2	33.5	36.7	35.5	34.2	34.4	34.6	32.4	30.2	
G98.0	27.9	31.7	35.5	34.2	32.9	33.1	33.3	30.6	27.9	
G99.0	25.4	29.8	34.2	33.0	31.8	31.8	31.8	28.6	25.4	
G100.0	23.3	27.4	31.5	31.0	30.5	30.4	30.4	26.9	23.3	
G101.0	21.5	16.4	11.3	19.9	28.4	28.6	28.8	25.1	21.5	
G102.0	20.1	12.0	3.8	15.1	26.3	26.6	27.0	23.6	20.1	
G103.0	19.0	9.7	0.5	12.4	24.2	24.6	24.9	21.9	19.0	
G104.0	17.3	9.0	0.7	11.4	22.2	22.6	23.1	20.2	17.3	
G105.0	15.2	18.2	21.2	20.6	20.0	20.7	21.4	18.3	15.2	
G106.0	13.4	17.8	22.1	20.2	18.2	18.9	19.6	16.5	13.4	
G107.0	11.8	16.1	20.5	18.5	16.4	17.2	18.0	14.9	11.8	
G108.0	10.2	14.6	19.0	16.8	14.7	15.6	16.6	13.4	10.2	
G109.0	8.9	13.2	17.5	15.3	13.1	14.1	15.1	12.0	8.9	
G110.0	7.8	12.0	16.1	13.9	11.8	12.8	13.9	10.9	7.8	

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G111.0	6.9	10.9	14.9	12.9	11.0	11.8	12.7	9.8	6.9	
G112.0	6.1	9.8	13.6	12.0	10.4	11.0	11.5	8.8	6.1	
G113.0	5.4	8.9	12.4	11.3	10.1	10.3	10.4	7.9	5.4	
G114.0	4.8	8.0	11.3	10.6	10.0	9.7	9.4	7.1	4.8	
G115.0	4.3	7.3	10.3	10.1	9.8	9.2	8.5	6.4	4.3	
G116.0	4.2	6.7	9.2	9.4	9.6	8.6	7.6	5.9	4.2	
G117.0	4.4	6.3	8.3	8.8	9.3	8.0	6.7	5.6	4.4	
G118.0	4.9	6.2	7.4	8.3	9.1	7.5	5.9	5.4	4.9	
G119.0	5.6	6.1	6.6	7.7	8.9	7.0	5.2	5.4	5.6	
G120.0	6.1	6.0	5.9	7.3	8.7	6.7	4.6	5.4	6.1	
G121.0	6.4	5.8	5.1	6.8	8.5	6.3	4.1	5.3	6.4	
G122.0	6.4	5.2	4.1	6.3	8.5	6.3	4.0	5.2	6.4	
G123.0	6.5	5.0	3.5	6.1	8.7	6.5	4.4	5.4	6.5	
G124.0	6.7	5.6	4.5	6.8	9.1	7.1	5.0	5.9	6.7	
G125.0	7.2	6.1	4.9	7.2	9.5	7.5	5.6	6.4	7.2	
G126.0	7.7	6.7	5.7	7.8	10.0	8.1	6.2	6.9	7.7	
G127.0	8.2	7.4	6.6	8.5	10.4	8.5	6.7	7.5	8.2	
G128.0	8.1	7.7	7.3	9.0	10.8	9.0	7.3	7.7	8.1	
G129.0	8.8	8.3	7.8	9.5	11.2	9.5	7.8	8.3	8.8	
G130.0	9.1	8.7	8.4	10.0	11.6	9.9	8.2	8.7	9.1	
G131.0	9.5	9.1	8.8	10.4	12.0	10.3	8.6	9.1	9.5	
G132.0	10.2	9.7	9.3	10.8	12.4	10.7	9.0	9.6	10.2	
G133.0	10.5	10.1	9.7	11.3	12.8	11.0	9.2	9.9	10.5	
G134.0	10.8	10.5	10.2	11.7	13.2	11.3	9.5	10.1	10.8	
G135.0	11.2	10.8	10.5	12.1	13.6	11.6	9.6	10.4	11.2	
G136.0	11.6	11.1	10.7	12.2	13.8	11.7	9.6	10.6	11.6	
G137.0	11.8	11.3	10.8	12.2	13.6	11.5	9.3	10.5	11.8	
G138.0	11.8	11.2	10.7	12.0	13.4	11.2	9.0	10.4	11.8	
G139.0	11.5	11.0	10.5	11.8	13.1	11.0	8.8	10.2	11.5	
G140.0	11.3	10.7	10.2	11.5	12.9	10.7	8.6	9.9	11.3	
G141.0	11.1	10.3	9.6	11.1	12.6	10.5	8.3	9.7	11.1	
G142.0	10.8	10.1	9.3	10.9	12.4	10.2	8.0	9.4	10.8	
G143.0	10.5	9.7	9.0	10.6	12.1	9.8	7.4	8.9	10.5	
G144.0	10.2	9.4	8.7	10.3	11.9	9.3	6.7	8.4	10.2	
G145.0	9.8	9.0	8.2	9.8	11.5	8.8	6.1	7.9	9.8	
G146.0	9.3	8.4	7.5	9.3	11.1	8.3	5.5	7.4	9.3	
G147.0	8.9	8.1	7.2	9.0	10.7	7.9	5.0	7.0	8.9	

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G148.0	8.6	7.4	6.2	8.3	10.4	7.5	4.6	6.6	8.6	
G149.0	8.2	6.7	5.2	7.7	10.1	7.1	4.1	6.2	8.2	
G150.0	7.9	6.3	4.8	7.3	9.8	6.7	3.6	5.7	7.9	
G151.0	7.7	6.0	4.2	6.9	9.6	6.2	2.9	5.3	7.7	
G152.0	7.5	5.6	3.7	6.5	9.3	5.6	1.9	4.7	7.5	
G153.0	7.3	5.0	2.8	5.7	8.7	5.2	1.6	4.5	7.3	
G154.0	7.2	4.8	2.3	4.7	7.1	4.3	1.5	4.3	7.2	
G155.0	7.0	4.5	2.0	3.7	5.4	3.4	1.3	4.1	7.0	
G156.0	6.5	4.1	1.7	2.8	3.9	2.5	1.1	3.8	6.5	
G157.0	5.4	3.6	1.8	2.0	2.3	1.7	1.0	3.2	5.4	
G158.0	4.0	2.9	1.7	1.4	1.0	1.0	0.9	2.4	4.0	
G159.0	2.4	2.2	2.0	1.4	0.9	0.8	0.8	1.6	2.4	
G160.0	1.1	1.5	1.8	1.3	0.8	0.8	0.8	0.9	1.1	
G161.0	0.9	1.1	1.3	1.0	0.8	0.8	0.8	0.9	0.9	
G162.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.9	0.9	
G163.0	0.9	1.0	1.0	0.9	0.8	0.8	0.8	0.8	0.9	
G164.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.9	
G165.0	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	
G166.0	0.9	1.0	1.1	0.9	0.8	0.8	0.8	0.8	0.9	
G167.0	0.8	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	
G168.0	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	
G169.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.9	
G170.0	0.9	0.8	0.8	0.8	0.9	0.8	0.8	0.8	0.9	
G171.0	0.9	0.8	0.8	0.9	0.9	0.9	0.8	0.8	0.9	
G172.0	0.9	0.8	0.8	0.9	0.9	0.9	0.8	0.8	0.9	
G173.0	0.9	0.9	0.8	0.9	0.9	0.9	0.8	0.9	0.9	
G174.0	0.9	0.9	0.8	0.9	0.9	0.8	0.8	0.9	0.9	
G175.0	0.9	0.9	0.8	0.9	0.9	0.9	0.8	0.9	0.9	
G176.0	0.9	0.9	0.8	0.9	0.9	0.9	0.8	0.9	0.9	
G177.0	0.9	0.9	0.8	0.9	0.9	0.9	0.8	0.9	0.9	
G178.0	0.9	0.9	0.8	0.9	0.9	0.9	0.8	0.9	0.9	
G179.0	0.9	0.9	0.8	0.9	0.9	0.8	0.8	0.9	0.9	
G180.0	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.9	0.9	

C Plane (°):0.0-360.0: 45.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.508 m [K=1.0000]
 Humidity: 65
 Inspector:

LED Average Luminance Report

Avg.L	cd/m ²
L 0-180(65) av	1.#J
L 0-180(75) av	1.#J
L 0-180(85) av	1.#J
L 90-270(65) av	1.#J
L 90-270(75) av	1.#J
L 90-270(85) av	1.#J
L 45(65) av	1.#J
L 45(75) av	1.#J
L 45(85) av	1.#J

Standard: GB/T 29293-2012