




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Argo

FM-4207

PRODUCT DESCRIPTION


A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

FEATURES

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 120-277V
Dimming	TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	2700K, 3500K, 3000K
CRI	90
Construction	Aluminum body with PC diffuser, Aluminum body with acrylic diffuser
Driver Dimension	2.0" x 1.4" x 1.0"

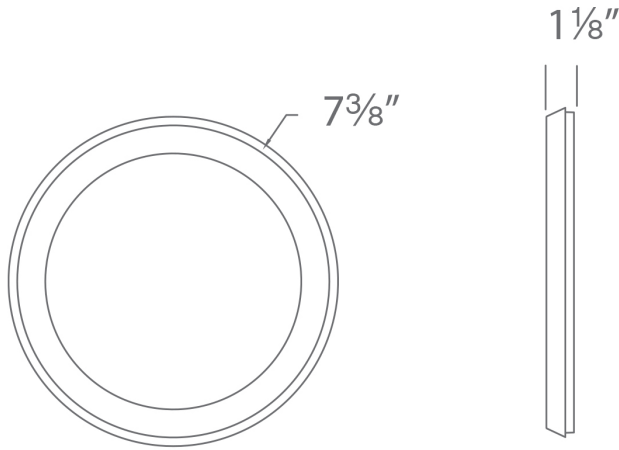


FM-4207

REPLACEMENT PARTS

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens	Title 24
FM-4207 7"	2700K 90	BK Black	14.9W	120-277V	1391	994	YES
	2700K 90	BN Brushed Nickel	14.9W	120-277V	1391	994	YES
	2700K 90	WT White	14.9W	120-277V	1391	994	YES
	3500K 90	BK Black	14.9W	120-277V	1391	1029	YES
	3500K 90	BN Brushed Nickel	14.9W	120-277V	1391	1029	YES
	3500K 90	WT White	14.9W	120-277V	1391	1029	YES
	3000K 90	BK Black	14.9W	120 VAC	1391	1002	Yes
	3000K 90	BN Brushed Nickel	14.9W	120 VAC	1391	1002	YES
	3000K 90	WT White	14.9W	120 VAC	1391	1002	YES

Example: FM-4207-WT

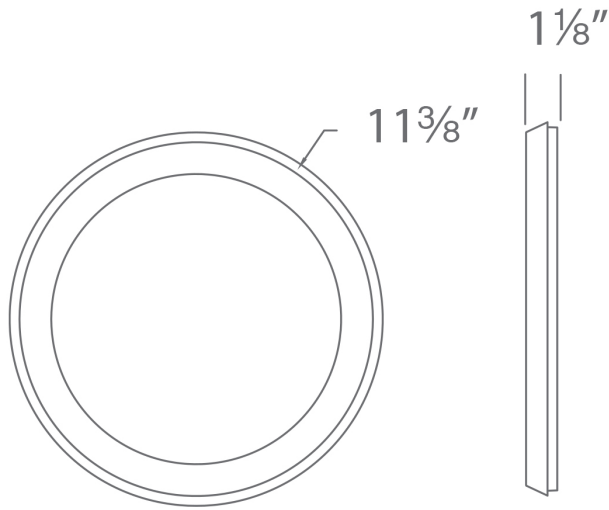

FM-4211


Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Argo

FM-4211

PRODUCT DESCRIPTION

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

FEATURES

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

SPECIFICATIONS


Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 120-277V
Dimming	TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	2700K, 3500K, 3000K
CRI	90
Construction	Aluminum body with PC diffuser, Aluminum body with acrylic diffuser
Driver Dimension	2.0" x 1.4" x 1.0"

REPLACEMENT PARTS

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens	Title 24
FM-4211 11"	2700K 90	BK Black	20.6W	120-277V	2109	1461	YES
	2700K 90	BN Brushed Nickel	20.6W	120-277V	2109	1461	YES
	2700K 90	WT White	20.6W	120-277V	2109	1461	YES
	3500K 90	BK Black	20.6W	120-277V	2109	1472	YES
	3500K 90	BN Brushed Nickel	20.6W	120-277V	2109	1472	YES
	3500K 90	WT White	20.6W	120-277V	2109	1472	YES
	3000K 90	BK Black	19.8W	120 VAC	2109	1521	Yes
	3000K 90	BN Brushed Nickel	19.8W	120 VAC	2109	1521	YES
	3000K 90	WT White	19.8W	120 VAC	2109	1521	YES

Example: **FM-4211-WT**

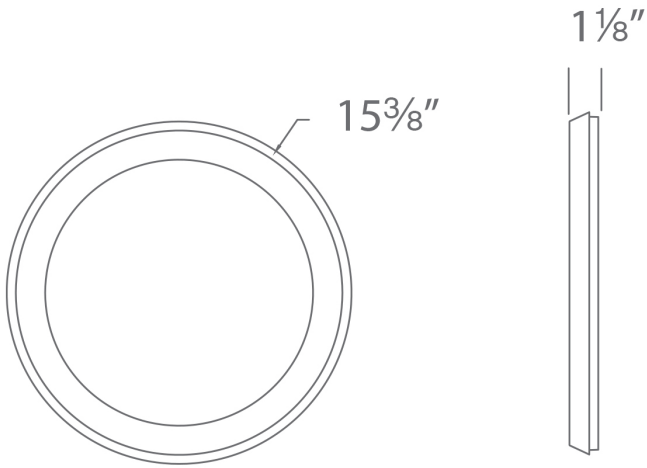

FM-4215


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Argo

FM-4215

PRODUCT DESCRIPTION

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

FEATURES

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

SPECIFICATIONS


Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 120-277V
Driver Dimension	2.0" x 1.4" x 1.0"
Dimming	TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K, 3500K, 2700K
CRI	90
Construction	Aluminum body with acrylic diffuser, Aluminum body with PC diffuser

REPLACEMENT PARTS

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens	Title 24
FM-4215 15"	2700K 90	BK Black	27.5W	120-277V	3084	2114	YES
	2700K 90	BN Brushed Nickel	27.5W	120-277V	3084	2114	YES
	2700K 90	WT White	27.5W	120-277V	3084	2114	YES
	3500K 90	BK Black	27.5W	120-277V	3084	2278	YES
	3500K 90	BN Brushed Nickel	27.5W	120-277V	3084	2278	YES
	3500K 90	WT White	27.5W	120-277V	3084	2278	YES
	3000K 90	BK Black	26.2W	120 VAC	3084	2221	Yes
	3000K 90	BN Brushed Nickel	26.2W	120 VAC	3084	2221	YES
	3000K 90	WT White	26.2W	120 VAC	3084	2221	YES

Example: FM-4215-WT

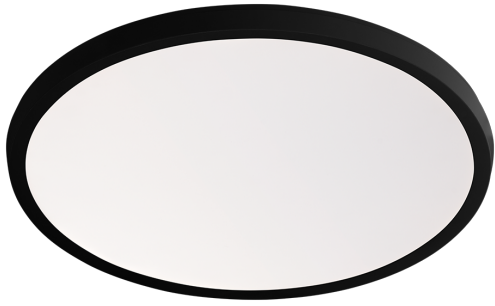


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Argo

FM-4219

PRODUCT DESCRIPTION

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

FEATURES


- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277V
Dimming	TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	2700K, 3500K, 3000K
CRI	90
Construction	Aluminum body with PC diffuser, Aluminum body with acrylic diffuser
Driver Dimension	2.0" x 1.4" x 1.0"

REPLACEMENT PARTS

HDW-LX20-MA - Hardware Pack

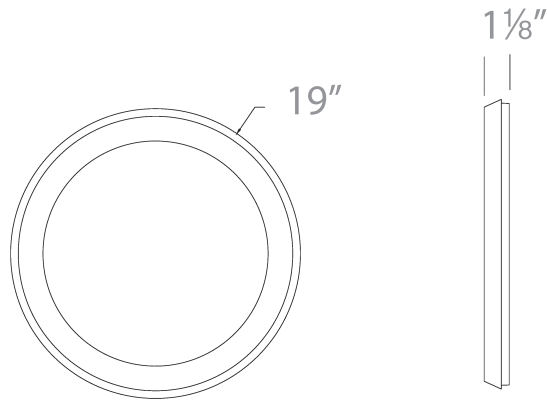

FM-4219

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens	Title 24
FM-4219 19"	2700K 90	BK Black	32.7W	120-277V	3985	2214	YES
	2700K 90	BN Brushed Nickel	32.7W	120-277V	3985	2214	YES
	2700K 90	WT White	32.7W	120-277V	3985	2214	YES
	3500K 90	BK Black	32.7W	120-277V	3985	2389	YES
	3500K 90	BN Brushed Nickel	32.7W	120-277V	3985	2389	YES
	3500K 90	WT White	32.7W	120-277V	3985	2389	YES
	3000K 90	BK Black	31W	120-277V	3985	2870	Yes
	3000K 90	BN Brushed Nickel	31W	120-277V	3985	2870	YES
	3000K 90	WT White	31W	120-277V	3985	2870	YES

Example: FM-4219-WT