


MODEL NAME **HPD6-CC-V**
HILUX
6-Inch High-Powered Commercial Downlight

This recessed downlight is a go-to for your commercial projects.

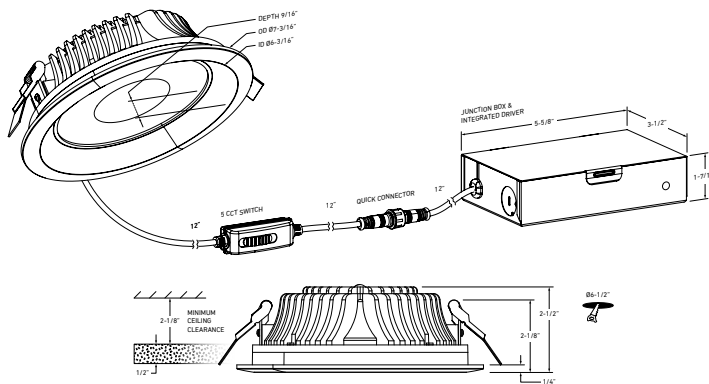


PROJECT:	TYPE:
DATE:	QTY:
NOTES:	


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
6"	30W	2100lm	2700K 3000K 3500K 4000K 5000K	90	277V/347V	115°	<input type="radio"/> White <input checked="" type="radio"/> Black

*Lumen output measured at 3000K

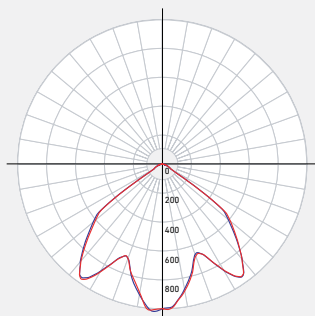LIGHT DISTRIBUTION


CONSTRUCTION	Lens Clear	Type of optics Reflector	Type of LED COB
	Lens material Glass	Housing material Cast aluminum	Cut hole size 6-1/2"

RATINGS	Placement Indoor/Outdoor	Lifespan 50,000 hrs.	FT rating FT6
	Location Wet	Certifications ETL, FCC, ICES, ES IC, ASTM E283-04, T24	Operating temperature -20° to 40° C

WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- Push-in wire connectors
- Mounting hardware
- Instruction sheet

ACCESSORIES

- [RFP-UNI](#)
Universal Drilling Plate
- [RFP-46](#)
Drilling Plate

ADAPTERS

- [REC-EXT108](#)
108" extension cord for recessed fixtures
- [REC-EXT230](#)
230" extension cord for recessed fixtures

