

LIVING DISTRICT

Installation manual for:


LD7001W21C W20.6"*H4.7"*E3.5" L3

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P2) in side of top unit the mounting bracket.
6. With knurled nut (P10), plastic gasket (P9) Crystal panel (P8) lock on the lamp
7. Lock the lamp body on the mounting bracket (P1) on the wall with a flat head screw (P3)
8. Install G9 light source.(Bulbs not supplied)

The end!

PARTS LIST

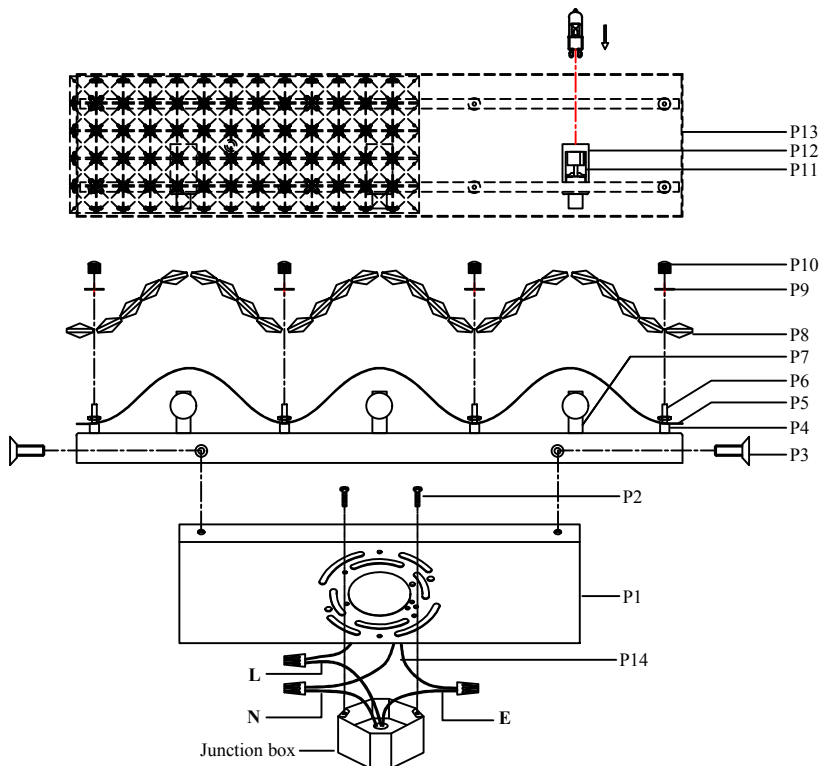

| Part | Picture | Description | Qty | Check list |
|------|---------|--|-----|------------|
| P1 | | Mounting bracket (L14.2"*W4.4"*H0.7") | 1 | |
| P2 | | Mounting bracket screw | 2 | |
| P3 | | Flat head Screw | 1 | |
| P4 | | Glass plate | 8 | |
| P5 | | Stainless steel bar L23.6" | 2 | |
| P6 | | M3 Round head screw | 8 | |
| P7 | | Square Iron Part | 3 | |
| P8 | | Crystal panel | 1 | |
| P9 | | Plastic gasket | 8 | |
| P10 | | Knurled nut | 8 | |
| P11 | | G9 Ceramic Socket | 3 | |
| P12 | | ø0.9"*H1.7" Lampholder, Iron (Chrome) | 3 | |
| P13 | | Canopy(L20"*W4.7"*H1", Stainless steel) | 1 | |
| P14 | | 18# Internal single insulation black and White Teflon Wire L9.8" | 1 | |

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire