

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Tao

### Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-W5312 12"	3000K 90	11W	830	220	BZ Bronze

Example: **WS-W5312-BZ**

• For 277V special order, add an "F" before the finish: WS-W5312F-BZ

#### DESCRIPTION

Architecturally harmonious form gravity cast from aluminum for structural durability. The architectural design features a sliver window of glass with an optical pattern for visual interest. Effective down lighting integrated for illuminating pathways. Wet Location listed and ADA Compliant for interior or exterior installations.

#### FEATURES

- Downlight adds functional path lighting
- Weather resistant powder coat finish
- Patterned crystal glass insert adds visual interest
- Gravity cast aluminum housing
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	80000 Hours
Standards:	ETL, cETL, IP65 Wet Location Listed
Construction:	Aluminum hardware with glass diffuser

#### REPLACEMENT PARTS

- RPL-GLA-5312-01 - Inner glass for WS-W5312  
 RPL-GLA-5312-02 - Bottom glass for WS-W5312




#### FINISHES



Bronze

#### LINE DRAWING



**WS-W5312**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Tao

### Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-W5318 18"	3000K 90	15W	1218	250	BZ Bronze

Example: **WS-W5318-BZ**

• For 277V special order, add an "F" before the finish: WS-W5312F-BZ

#### DESCRIPTION

Architecturally harmonious form gravity cast from aluminum for structural durability. The architectural design features a sliver window of glass with an optical pattern for visual interest. Effective down lighting integrated for illuminating pathways. Wet Location listed and ADA Compliant for interior or exterior installations.

#### FEATURES

- Downlight adds functional path lighting
- Weather resistant powder coat finish
- Patterned crystal glass insert adds visual interest
- Gravity cast aluminum housing
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	80000 Hours
Standards:	ETL, cETL, IP65 Wet Location Listed
Construction:	Aluminum hardware with glass diffuser

#### REPLACEMENT PARTS

- RPL-GLA-5318-01 - Inner glass for WS-W5318  
 RPL-GLA-5318-02 - Bottom glass for WS-W5318




#### FINISHES



Bronze

#### LINE DRAWING

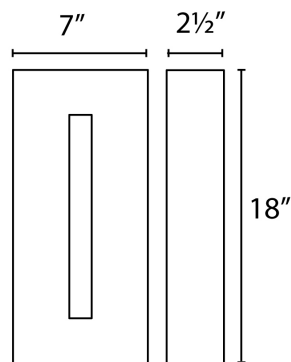

**WS-W5318**