# **Eddington Outdoor Wall**

## GENERATION LIGHTING

#### OUTDOOR

#### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

#### 8519301, 8619301, 8719301, 8819301 1.0

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


### GENERATION LIGHTING


# 7400 Linder Ave, Skokie, IL 160077 800.969.3347


#### www.generationlighting.com

© 2020 Generation Lighting. All rights reserved. The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.










# **SAVETHESE INSTRUCTIONS!**

# **Install the Fixture**

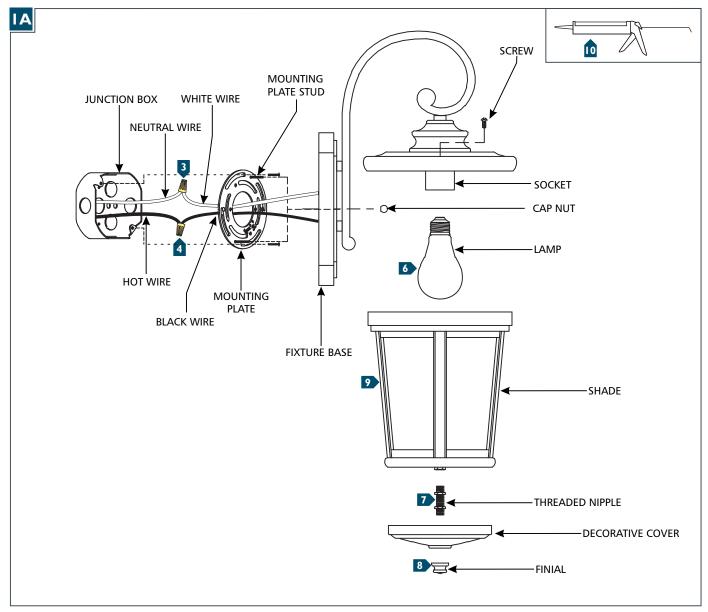

- **I** Secure the mounting plate to the junction box.
- 2 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- 5 Align and place the fixture base onto the mounting plate studs and secure it with the two cap nuts.
- 6 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- **7** Screw the threaded nipple into the bottom of the shade.
- 8 Place the decorative cover over the threaded nipple and secure in place with the finial.
- **9** Lift the shade up to the fixture and secure in place with the provided screws.
- **IO** For wet locations, caulk around the base of the fixture with waterproof construction sealant.