


PRODUCT NAME: Kem 4-Lite Pendant
ITEM NUMBER: E24304-18PC







Please consult your electrician for hanging fixture and wiring.

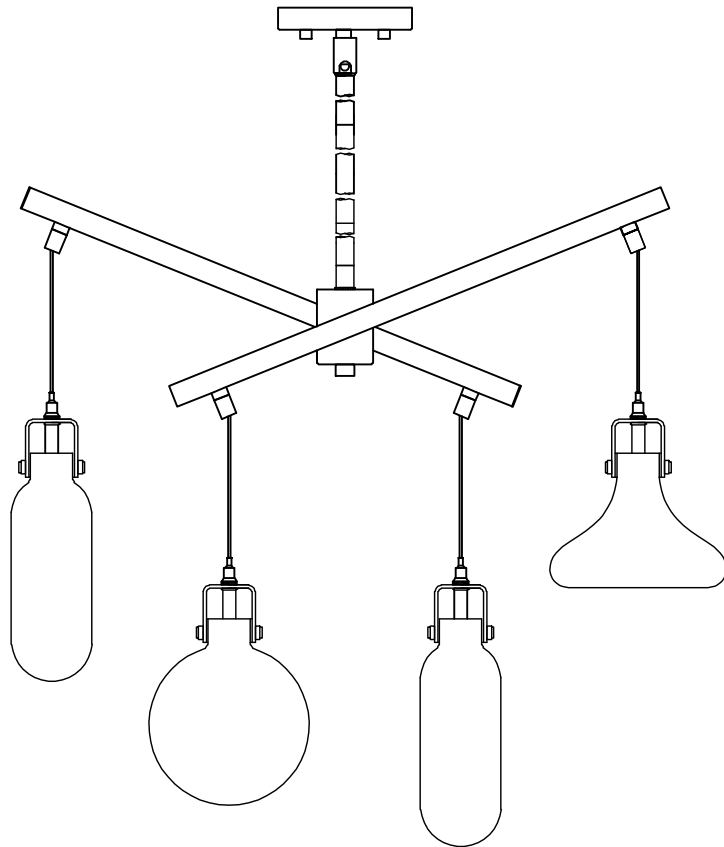



Caution: Xenon bulbs get very hot and may burn you. Always make sure bulbs are off for a minimum of 10 minutes before handling. Fixture may be dimmed using an electronic low voltage dimmer.

Bulb(included): 4-40 Watt G9 Bulbs

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation


- A**  Mounting Bracket(1pc)
- B**  Screw(2pcs)
- C**  Canopy(1pc)
- D**  Ball nut (2pcs)
- E**  Rod(1*6"+3*12")
- G**  G9 Bulb(4pcs)

Locate all hardware & components before discarding packaging

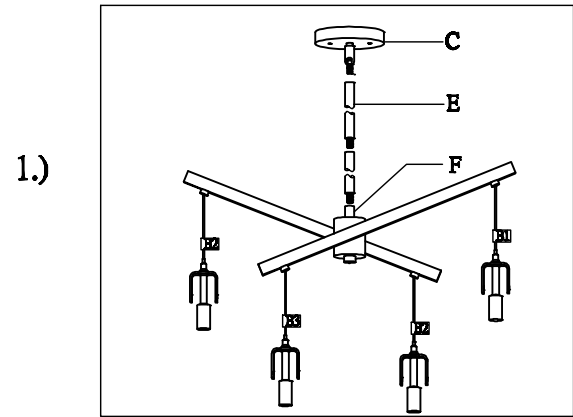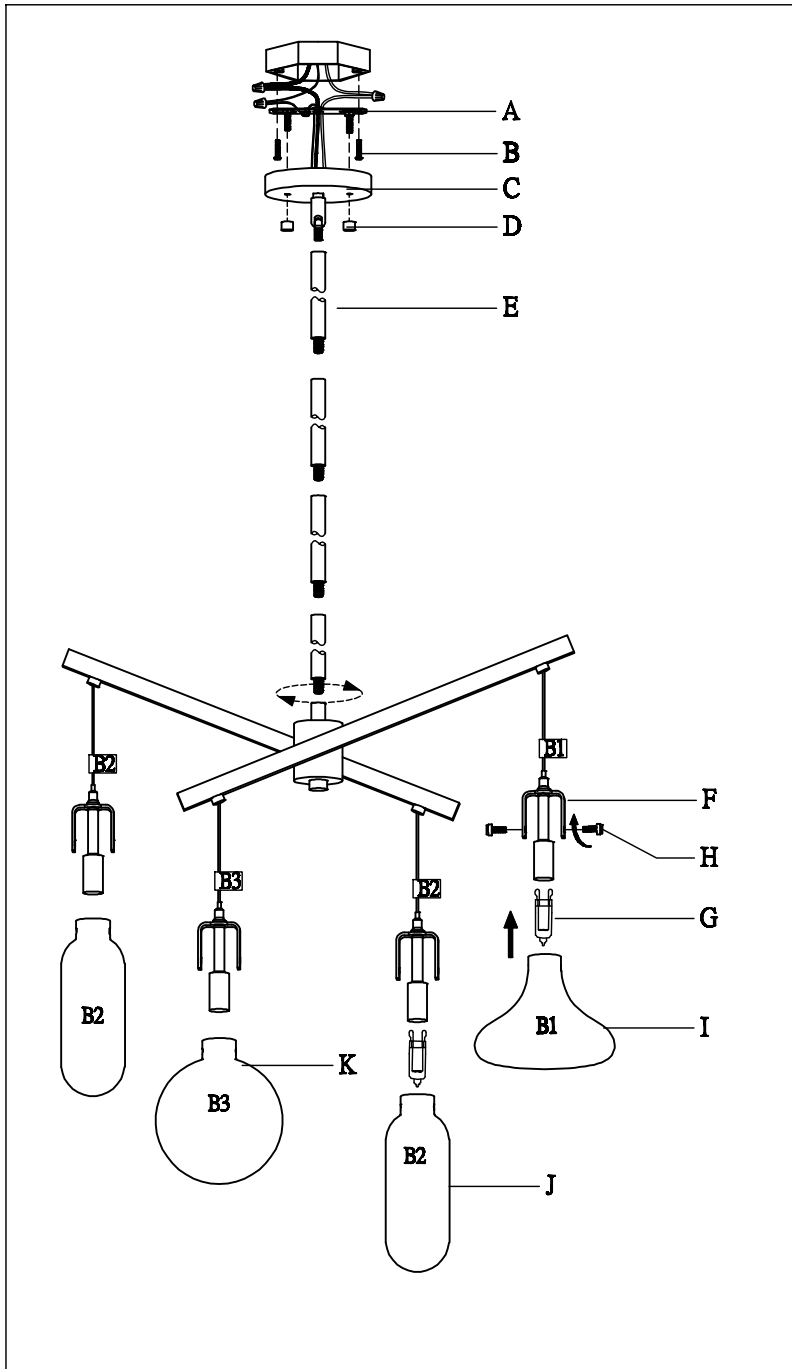

1.)

Step.1: Carefully remove packaging from fixture. Run wire through stems (E) and combine stem lengths to meet desired mounting height. Then attach canopy (C) to fixture.

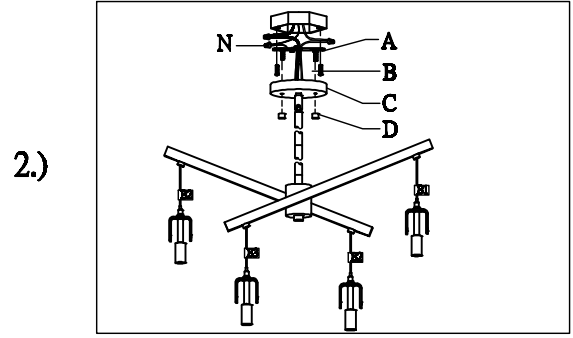

2.)

Step.2: Wire fixture to wires in outlet box.

Bare wire is for Ground. Install fixture to bracket and tighten ball nuts(D) on the canopy to secure.


Cleaning & Care:

Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



H
Screw(8pcs)



K
B3 Glass(1pc)





I
B1 Glass(1pc)



J
B2 Glass(2pcs)

Locate all hardware & components before discarding packaging

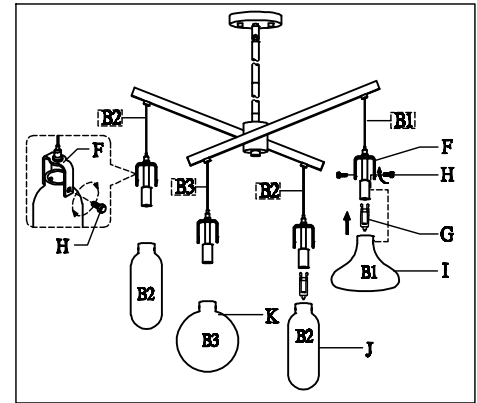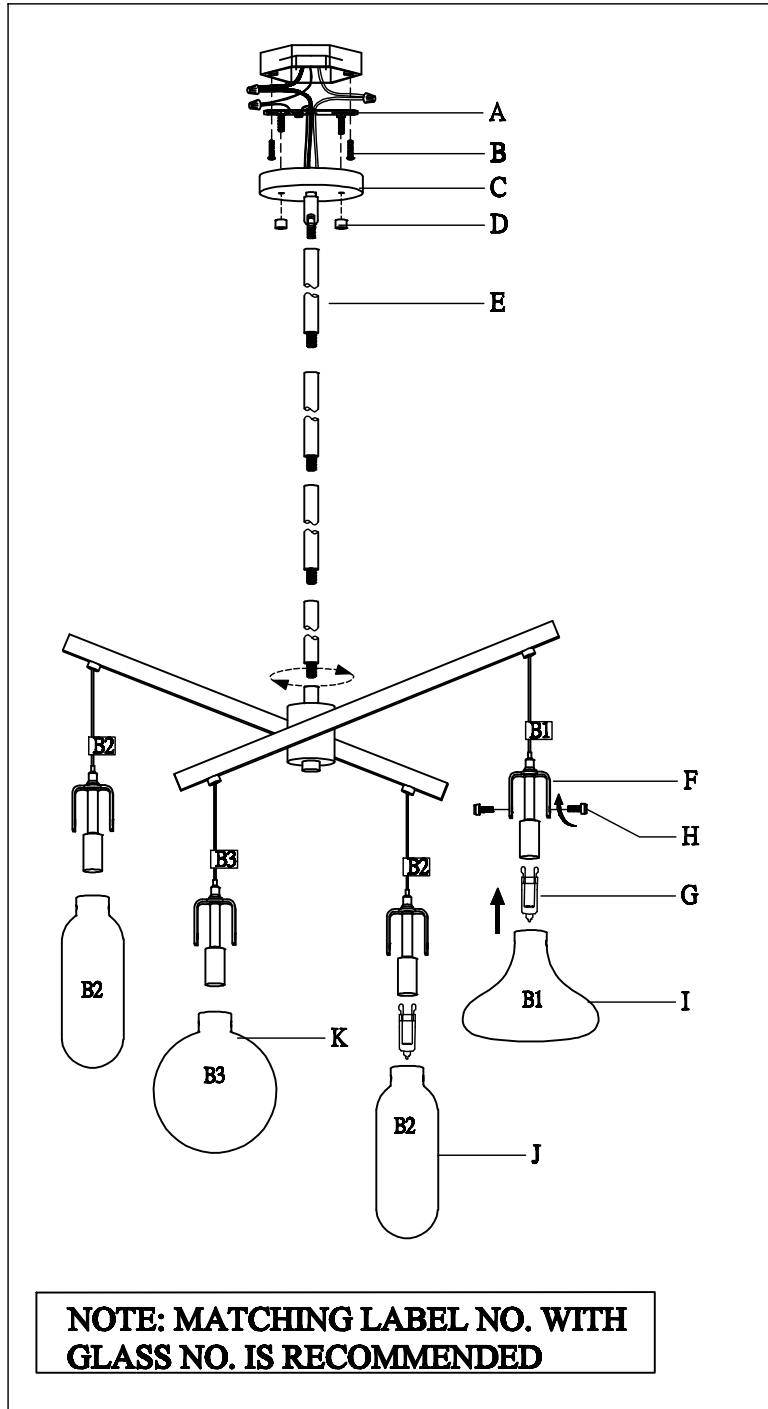

**1.) Step.3: Insert the G9 bulbs one by one
Attached the glass(B1, B2, B3) to yoke,
and secured with lock screw(H)**

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.