

## **SAFETY INFORMATION**

Please read and understand this entire manual before attempting to assemble, install or operate the product.


### **WARNING**

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.

### **CAUTION**

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.

### **TOOLS REQUIRED**

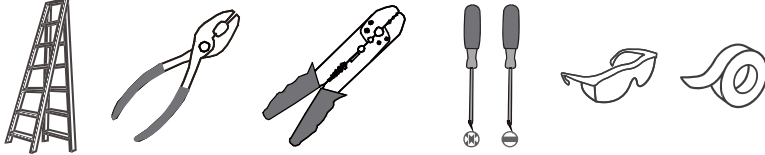


Ratings	120Vac, 60Hz	
	Model No.	Wattage
	PCAZR2818MBK	18W
	PCAZR1718MBK	18W

## **CARE AND MAINTENANCE**


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quozel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at [www.quezel.com](http://www.quezel.com).

## **PACKAGE CONTENTS**

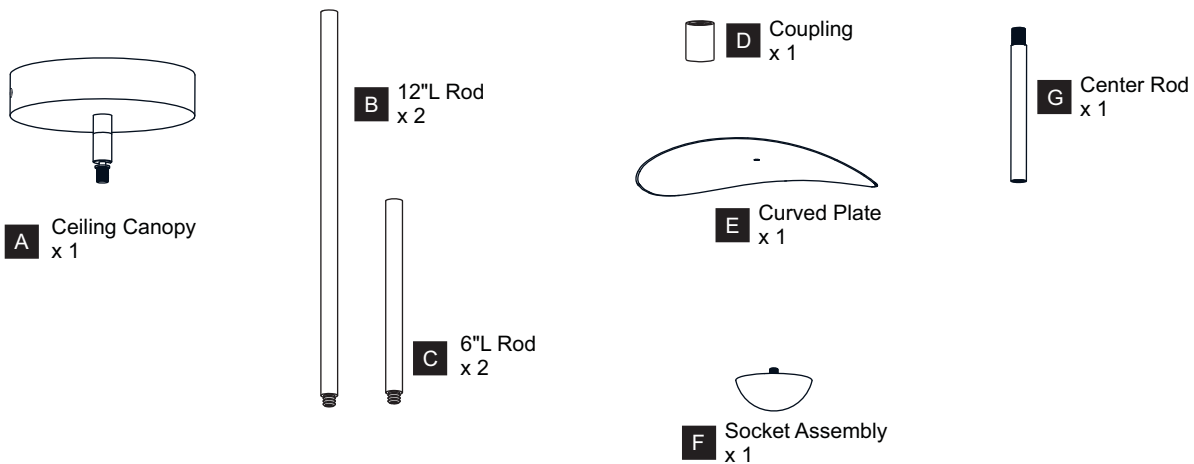


## **MOUNTING HARDWARE**

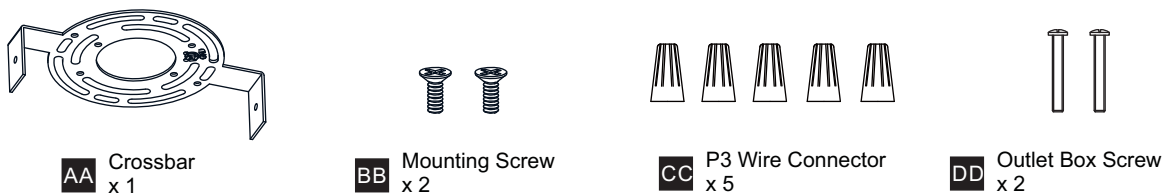

# INSTALLATION

## OPTION 1: PENDANT - PCAZR2818MBK

### 1 Install Socket Assembly to Curved Plate

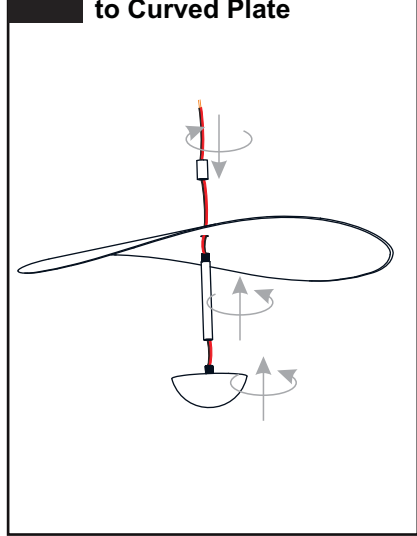


### 2 Install Rods

Optional Rods:


8 Feet Ceiling:  
(1) 6"L Rod + (1) 12"L Rod.

9 Feet Ceiling:  
(1) 6"L Rod + (2) 12"L Rods.


10 Feet Ceiling:  
(2) 6"L Rods + (2) 12"L Rods.

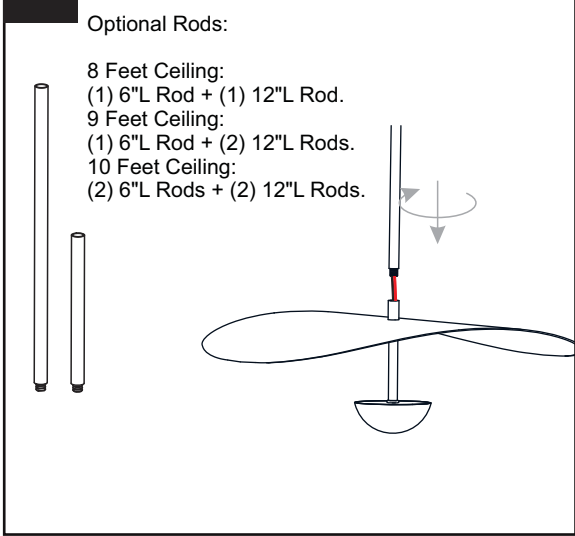


### 3 Tighten hex nut inside of the Ceiling Canopy

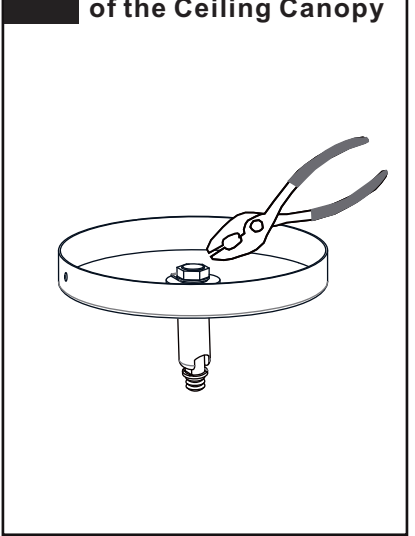

### 4 Install Ceiling Canopy to Upper Rod

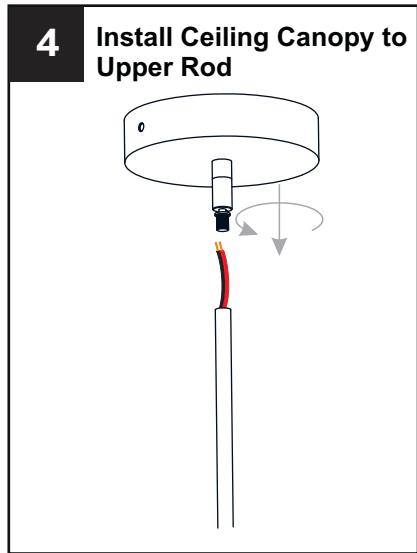

### 5 Connect Fixture Wires to Driver

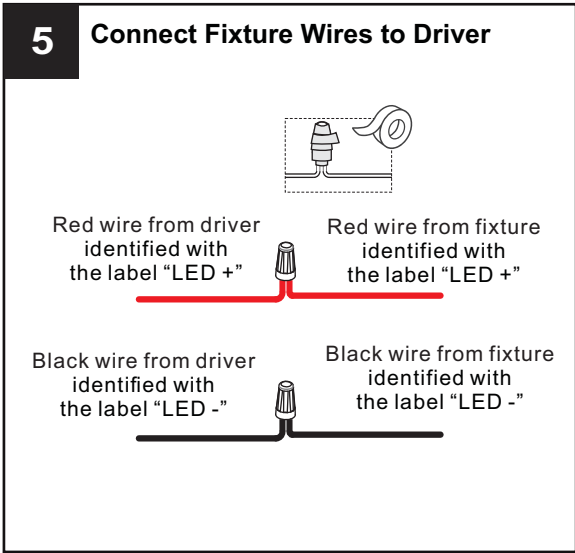


Red wire from driver identified with the label "LED +"      Red wire from fixture identified with the label "LED +"


Black wire from driver identified with the label "LED -"      Black wire from fixture identified with the label "LED -"

### 6 Install Crossbar

Outlet Box

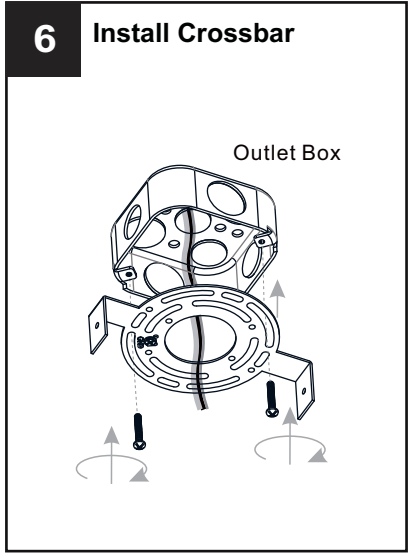

### 7 Wiring

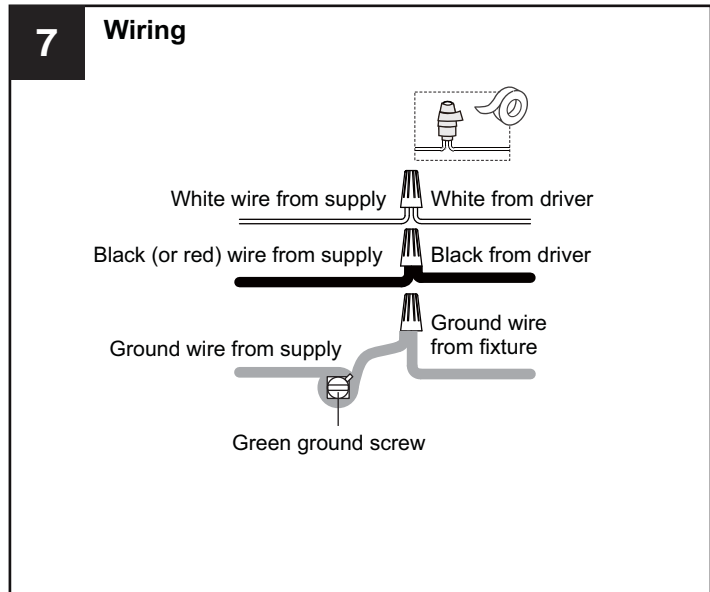


White wire from supply      White from driver

Black (or red) wire from supply      Black from driver

Ground wire from supply      Ground wire from fixture

Green ground screw

### 8 Install Ceiling Canopy to Crossbar

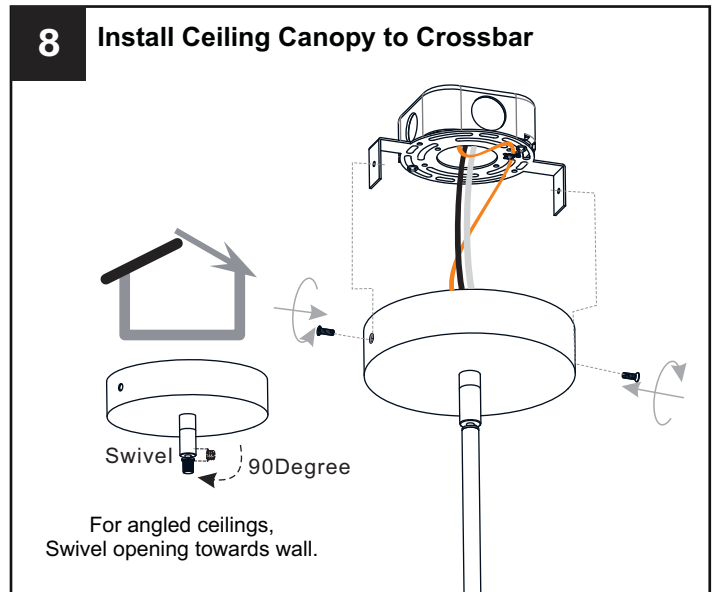

Swivel 90Degree


For angled ceilings, Swivel opening towards wall.

Your installation is now complete! Restore electricity and save this sheet for future reference.

**IMPORTANT:** This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. **DO NOT CUT SUPPLY WIRES** if you intend to use it as pendant light.

**OPTION 2: SEMI-FLUSH - PCAZR1718MBK**

\* Set aside (2) 6"L Rods and (2) 12"L Rods, swivel since they are not required for the semi-flush installation.



**1 Install Socket Assembly to Curved Plate**

**2 Remove Swivel**

Set aside Swivel

**3 Install Ceiling Canopy**

Supply Wire

\* Cut the supply wires leaving approximately 8" of wire extending from the ceiling canopy after assembly.

**4 Connect Fixture Wires to Driver**

Red wire from driver identified with the label "LED +"      Red wire from fixture identified with the label "LED +"

Black wire from driver identified with the label "LED -"      Black wire from fixture identified with the label "LED -"

**5 Install Crossbar**

Outlet Box

**6 Wiring**

White wire from supply      White from driver

Black (or red) wire from supply      Black from driver

Ground wire from supply      Ground wire from fixture

Green ground screw

**7 Install Ceiling Canopy to Crossbar**

**Your installation is now complete! Restore electricity and save this sheet for future reference.**