

# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:


ITEM NO.: DLC24 NAME: DELAWARE CHANDELIER

MATERIAL TYPE: STEEL FINISH: ENGLISH BRONZE

SOCKET TYPE: E12 SOCKET QTY: 24

BULB WATTAGE: 40W / 9W CFL / 4W LED

VOLTAGE: 110V-120V ITEM NET WEIGHT: 40.04LBS

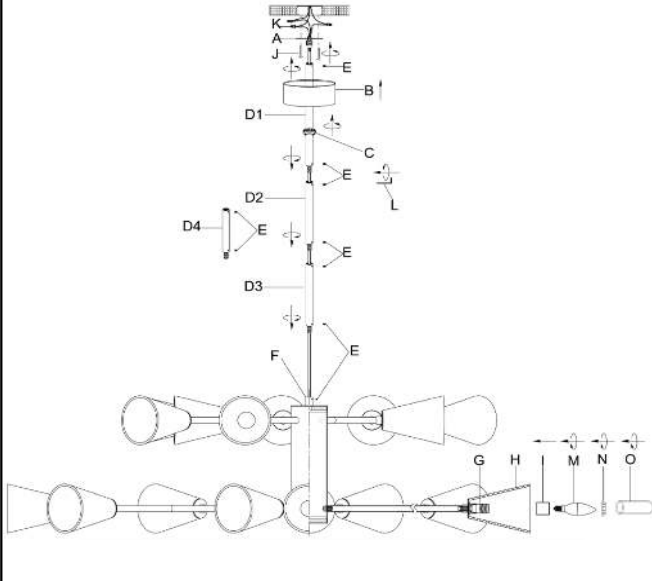

### PARTS INCLUDED:

Mounting Plate (A)	Qty: 1 Pc	Socket (G)	Qty: 24 Pcs
Canopy (B)	Qty: 1 Pc	Glass Shade (H)	Qty: 24 Pcs
Collar Loop (C)	Qty: 1 Pc	Metal sleeve (I)	Qty: 24 Pcs
Rod (D)	Qty: 4 Pcs	Socket ring (N)	Qty: 24 Pcs
Hex Screw (E)	Qty: 9 Pcs	Socket ring tool (O)	Qty: 1 Pc
Lamp Assembly (F)	Qty: 1 Pc		

### HARDWARE INCLUDED:

Mounting Screws (J)	Qty: 2 Pcs	Canopy Screws	
Plastic Wire Connector (K)	Qty: 3 Pcs	Allen Wrench (L)	Qty: 1 Pc
Green Ground Screw	Qty: 1 Pc		

### TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



### TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove the mounting plate(A) from the canopy by unscrewing the collar.
5. Connect the **lamp assembly (F)** and canopy(B) with rod(D1,D2,D3,D4) when you connect the rods, loosen the small hex screws(E) first then tighten with allen wrench(L) after all rods are connected. Be sure all the hexangular screws(E) are tight enough.
6. Carefully inspect the pendant's fixture wire: **Neutral fixture wire: White; Hot fixture wire: Black; Ground wire: Green**
7. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector(K) and wrap the connection with electrical tape.
8. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire connector(K) and wrap the connection with electrical tape.
9. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire connector(K) and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
10. Gently tuck the wire connections neatly into the ceiling junction box.
11. Place the mounting plate(A) over the center of the ceiling junction box.
12. Align holes in mounting plate(A) with holes in junction box and attach with two mounting screws. Secure screws by using enclosed Phillips head screwdriver.
13. Push canopy (B) up over the mounting plate(A) until it is flush with the ceiling.
14. Push collar loop (C) up to canopy (B) and tighten onto nipple in mounting plate (A) by turning in a clockwise to secure canopy.
15. Put the glass shade (H) onto the socket(G). And attach the metal sleeve(I), then tighten with socket ring (N) by socket ring tool(O).
16. Insert 24 TYPE-T 40W or/CFL 9W or / LED 4W bulb(not included) into the socket(G). **DO NOT EXCEED SPECIFIED WATTAGE.**
17. Restore power to junction box and test fixture.

### CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS